



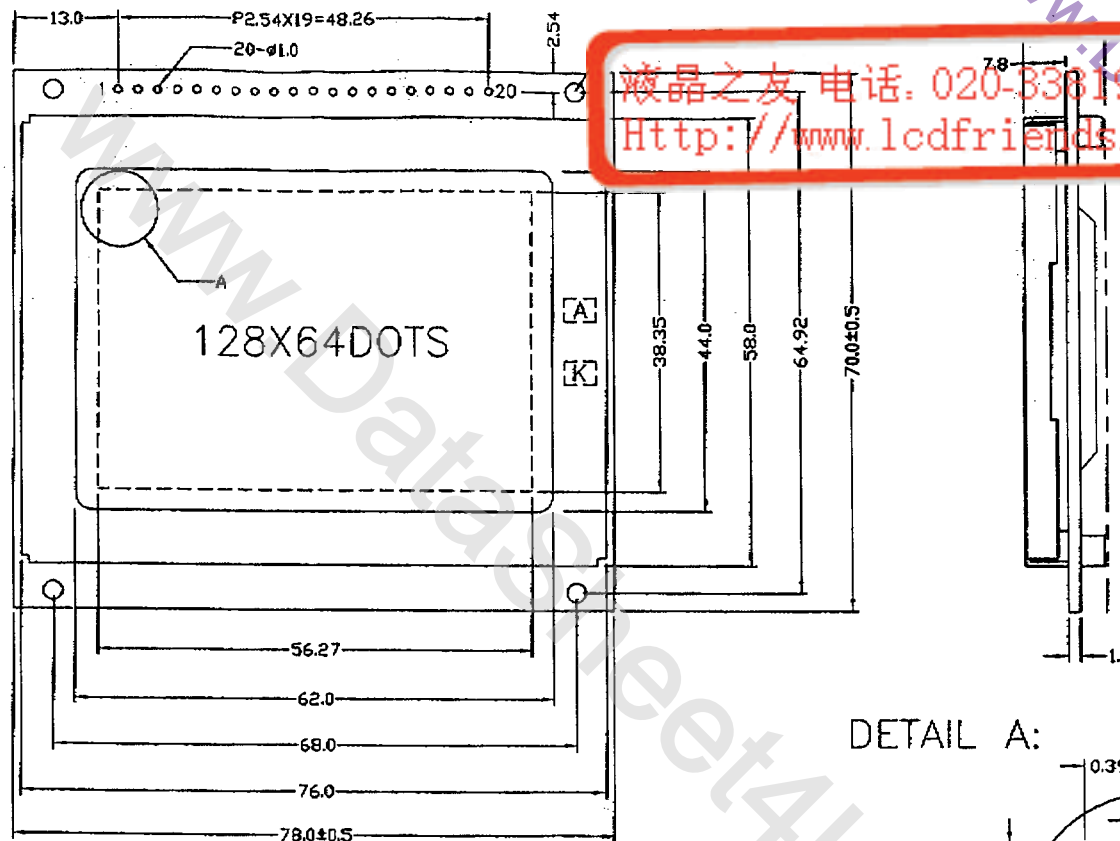

液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

DETAIL A:



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
FG	GND	VCC	VO	/WR	/RD	/CE	C/D	RST	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	LED+	LED-

NOTES:

- 1.DISPLAY TYPE: STN/YELLOW-GREEN MODE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.DRIVE METHOD: 1/64 DUTY 1/9 BIAS
- 5.LCD OPERATING VOLTAGE: 9.5V
- 6.VDD=5.0V
- 7.OPERATING TEMP: -20°C~+70°C
- 8.STORAGE TEMP: -30°C~+80°C
- 9.BACKLIGHT: LED(4.2V,YELLOW)
- 10.CONTROLLER AND DRIVERS: T6963C+T6A40+T6A39X2
- 11.UNMARKED TOLERANCE: ±0.3
- 12.THE OPTIONAL JUMP POINT OF J2,J6,J7,J10 ON PCB MUST BE CONNECTED WITH SOLDER.



TIAN-MA MICROELECTRONICS CO.

22/F., MANGDU Building, Shennan Road, Central, Shenzhen, D

DRAWN BY: 李健 5/02	TITLE: TM12864BCW3	
CHECKED BY: 马东 5/02	DWG NO: G-1	
APPROVED BY: 黄江 5/02		