

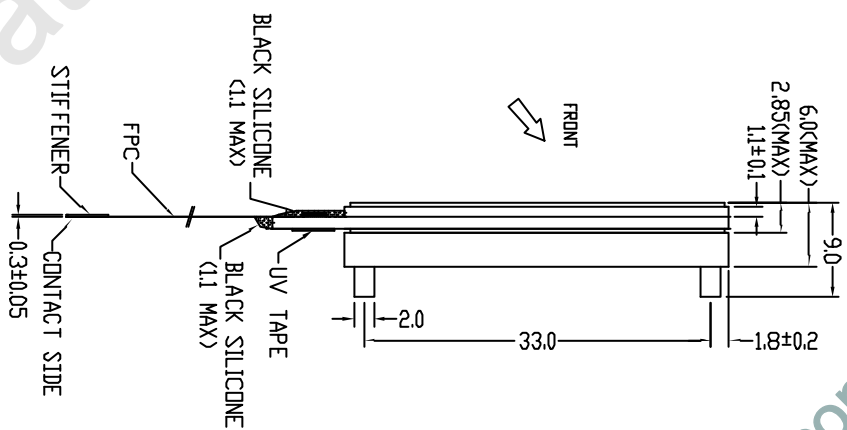
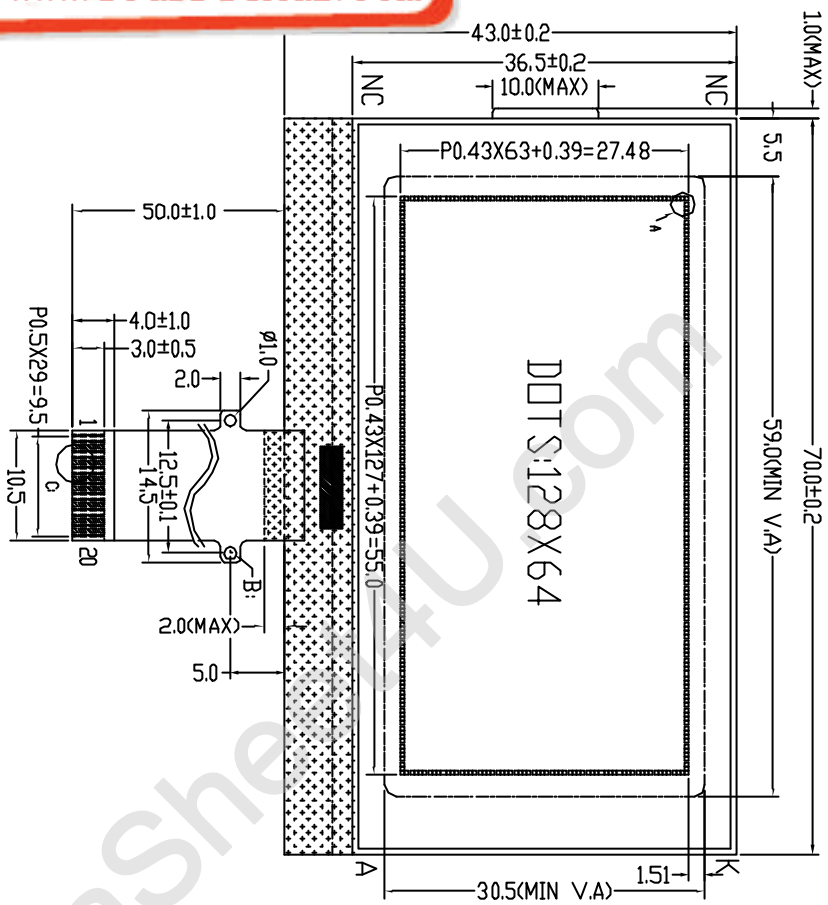





液晶之友 电话: 020-33819057
Http://www.lcdfriends.com



PIN	SYMBOL	PIN	SYMBOL
1	NC	11	C3+
2	V0	12	V _{OUT}
3	V4	13	VSS
4	V3	14	V _{DD}
5	V2	15	S1
6	V1	16	SCL
7	C2-	17	RS
8	C2+	18	/RES
9	C1+	19	/CS1
10	C1-	20	NC



- | | |
|---------------------------|----------------------------------|
| NOTES: | |
| 1. DISPLAY TYPE: | FSTN |
| 2. VIEWING DIRECTION: | 600 |
| 3. POLARIZER MODE: | TRANSPARENT/POSITIVE |
| 4. LOGIC VOLTAGE: | 3.0V |
| 5. LCD OPERATING VOLTAGE: | 9.0V |
| 6. DRIVE METHOD: | 1/65 DUTY |
| 7. OPERATING TEMP: | 1/9 BIAS |
| 8. STORAGE TEMP: | -20°C-+70°C |
| 9. CONTROLLER: | -30°C-+80°C |
| 10. BACKLIGHT: | S6B0724A01-B0CY |
| 11. CONNECTOR: | LEDXWHITE,TWO LAMPS,SINGLE SIDE) |
| 12. UNMARKED TOLERANCES: | FPC |
| | ±0.3mm |



6/F., CASTIC Building, Sherman Road, Central, Shenzhen, China

TIAN-MA MICROELECTRONICS CO.

BY: TM12864NJCWJ

BY:	SCALE:

BY:	DWG NO:	G-1	UNIT: mm
-----	---------	-----	----------

BY:	DWG NAME: TML2864NCCVGLG-1	SHEET NO: 1 OF 1
-----	----------------------------	------------------