


液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

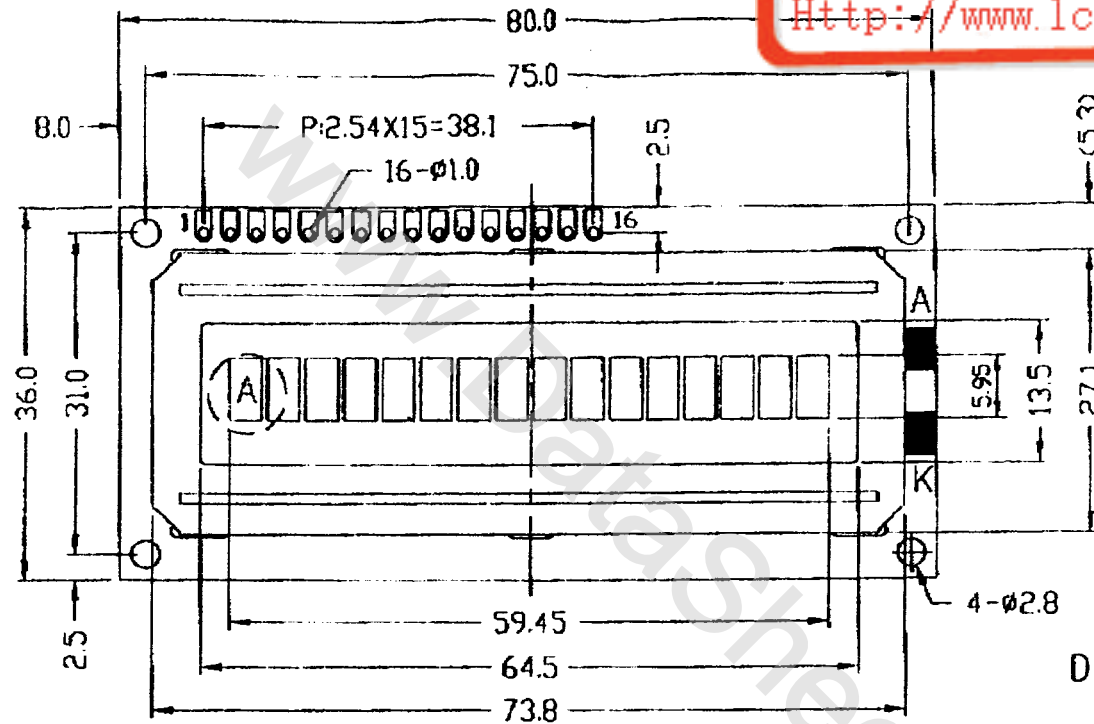


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{CC}	V _{EE}	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTES:

- 1.DISPLAY TYPE: STN/YELLOW GREEN MODE
- 2.VIEWING DIRECTION: 12:00
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 5.LCD OPERATING VOLTAGE:4.7V
- 6.OPERATING TEMP: 0°C~+50°C
- 7.STORAGE TEMP: -20°C~+60°C
- 8.CONTROLLER: S6A0069X01-C0CX(KS0066UP-00CC)
- 9.BACKLIGHT: LED
- 10.BEZEL IS TO BE PAINTED BLACK
- 11.ALL UNMARKED TOLERANCE: ±0.3mm

DETAIL A:

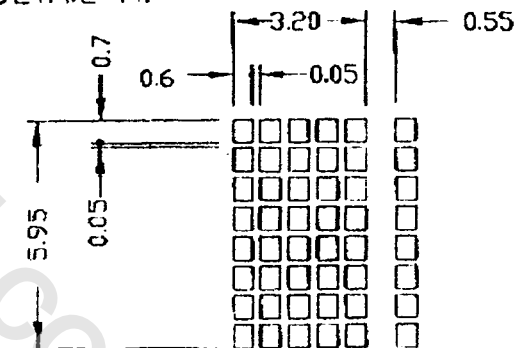

TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 罗伟 89-2000

CHECKED BY: 罗伟 89-2000


APPROVED BY: 罗伟 89-2000

CONFIRMED BY: 罗伟 89-2000

TITLE TM161ABCU6

DWG NO: G-1

DWG NAME: TM161ABCU6-1 SHEET NO: 01



SCALE:

UNIT: mm