



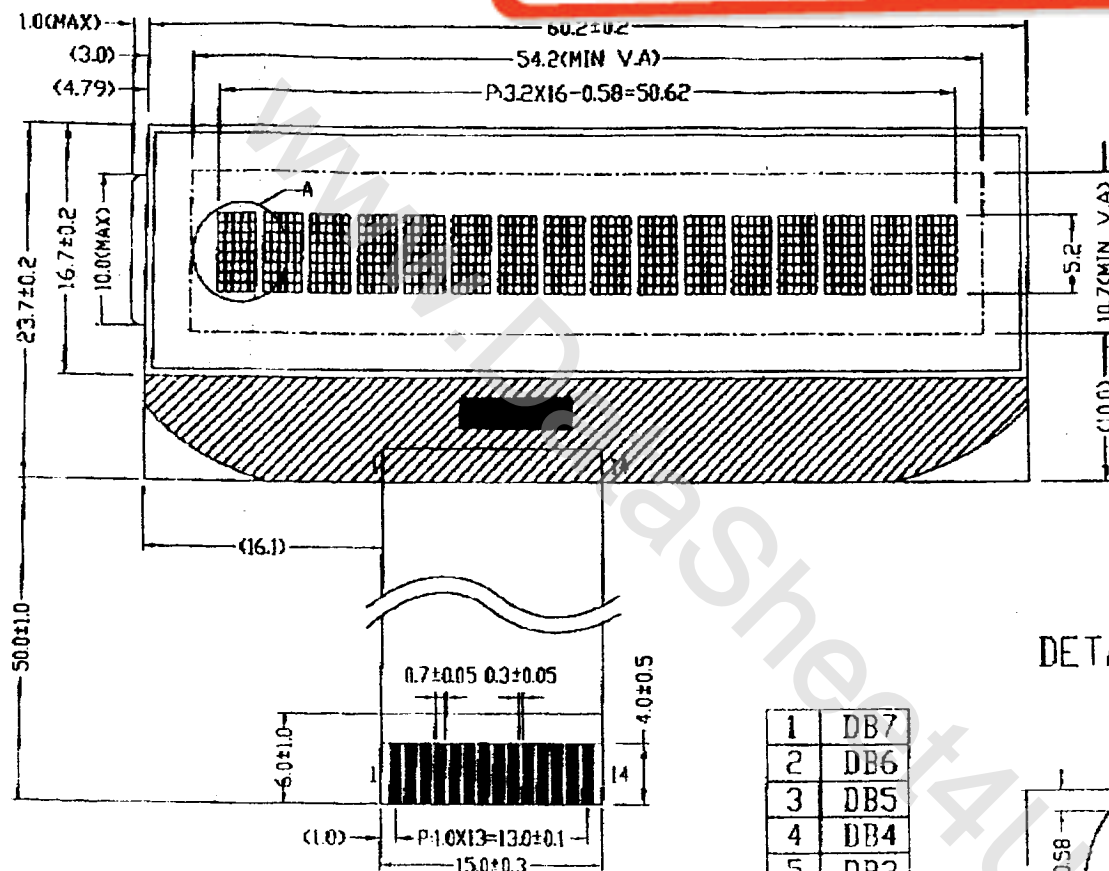


NOTES:

1. DISPLAY TYPE: FSTN
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: REFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
5. LCD OPERATING VOLTAGE: 4.7V
6. OPERATING TEMP.: 0°C~+50°C
7. STORAGE TEMP.: -20°C~+60°C
8. CONTROLLER: S6A0031X01-B0CY(KS0031UM-00CC)
9. WITHOUT BACKLIGHT
10. UNMARKED TOLERANCE: ±0.3mm

1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E
10	R/W
11	RS
12	Vo
13	Vdd
14	Vss

DETAIL A:

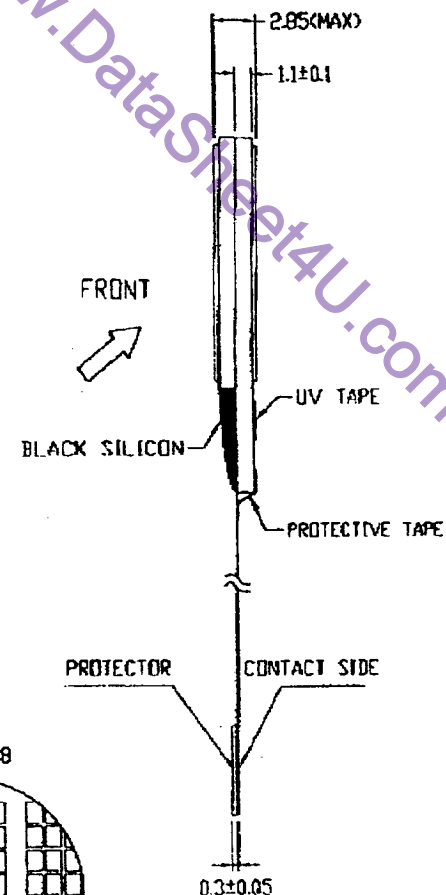

TIAN-MA MICROELECTRONICS CO.

G/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 罗邦虎 2001.12.21
CHECKED BY: 李 2001.12.21
APPROVED BY: 李 2001.12.21
CONFIRMED BY: 李 2001.12.21

TITLE: TM161BCAG
DWG NO: G-1
DWG NAME: TM161BCAG-1

SHEET NO: 07
SCALE: 1:1
UNIT: mm