



8.7

15.0(MAX)

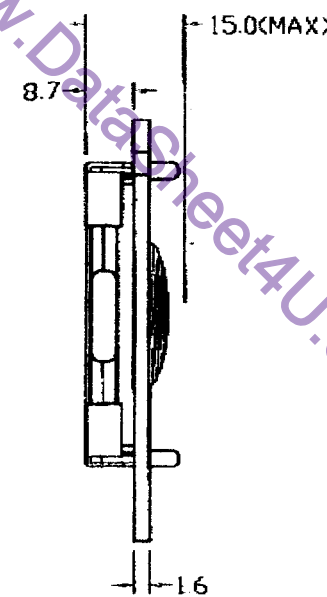

DETAIL: A

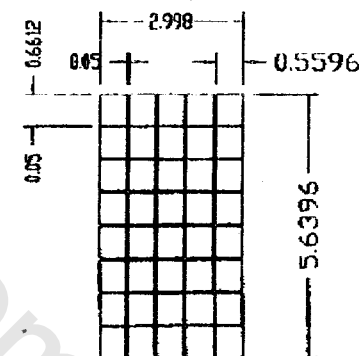


1: DISPLAY TYPE: SIN/GRAY MODE
2: VIEWING DIRECTION: 12:00
3: POLARIZER MODE: TRANSFLECTIVE/POSITIVE
4: DRIVE METHOD: 1/16 DUTY 1/5 BIAS
5: LCD OPERATING VOLTAGE: 4.3V
6: OPERATING TEMP: -20°C~+70°C
7: STORAGE TEMP: -30°C~+80°C
8: BACKLIGHT: LED
9: CONTROLLER: KS0066UP-00CC(S6A0069X01-C0CX)
10: ALL UNMARKED TOLERANCES: ±0.3mm
11: BEZEL IS TO BE PAINTED BLACK



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Sherman Road, Central, Shenzhen, China

	TITLE TM162IDCWU6
--	-------------------



DWC NO: G-1

SCALE: _____
UNIT: mm

DWC NAME: DWL2000000-1		SHEET NO: 00	
------------------------	--	--------------	--