



[Http://www.lcdfriends.com](http://www.lcdfriends.com)

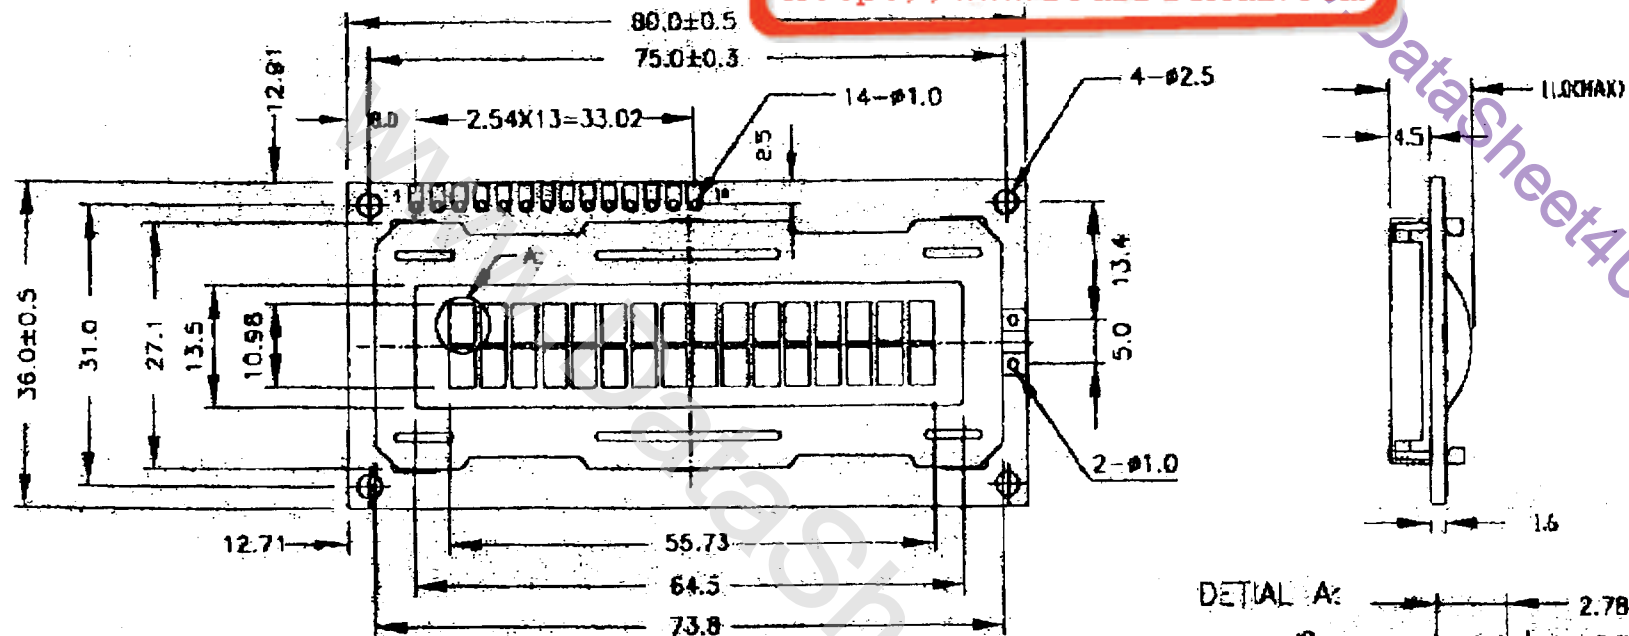

1	2	3	4	5	6	7	8	9	10	11	12	13	14
V _{SS}	V _{CC}	V _{EN}	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

NOTE:

1. DISPLAY TYPE: STN/GRAY MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: REFLECTIVE/POSITIVE
4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
5. LCD OPERATING VOLTAGE: 4.5V
6. OPERATING TEMP: 0°C-+50°C
7. STORAGE TEMP: -20°C-+60°C
8. CONTROLLER: KS0066UP00
9. WITHOUT BACKLIGHT
10. BEZEL IS TO BE PAINTED BLACK
11. UNMARKED TOLERANCE: $\pm 0.3\text{MM}$

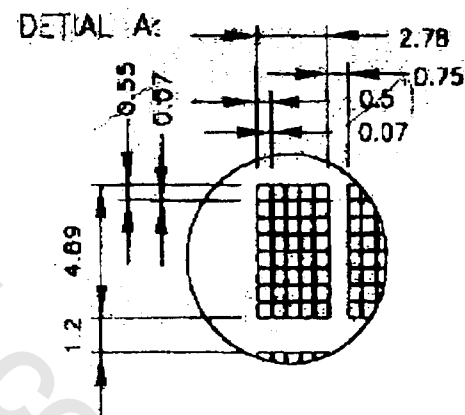

TLN-MA MICROELECTRONICS CO.

601., EASTIC Building, Shannan Road, Central, Shanghai, China

DRAWN BY *3-11-64*

TITLE TM 162 UDA6

CHECKED BY: [Signature]

DWG NO: C-1

APPROVED BY: [Signature]

DOC NO:	C-1	SELLER	
		BUYER	RENO

CONFIRMED BY: [Signature]

DTG NAME/ALIAS - SHIRT NO. 07