



液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

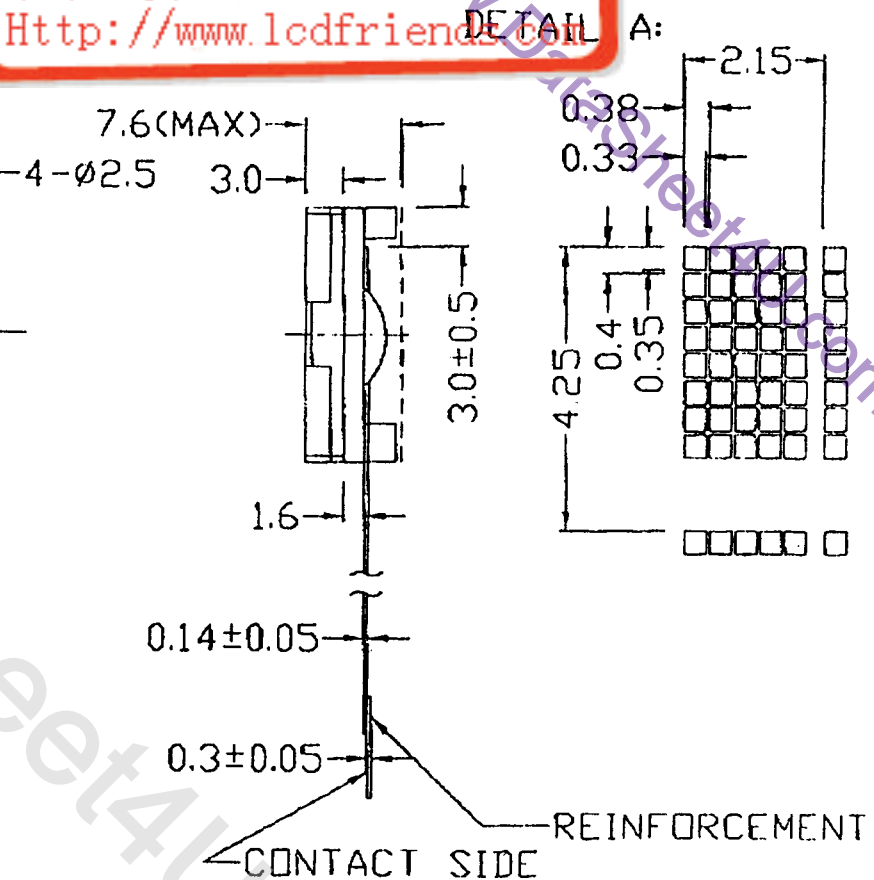

- NOTES:
1. DISPLAY TYPE: TN
 2. VIEWING DIRECTION: 12° 00
 3. POLARIZER MODE: REFLECTIVE/POSITIVE
 4. OPERATING TEMP: 0°C~+50°C
 5. STORAGE TEMP: -20°C~+60°C
 6. LCD OPERATING VOLTAGE: 4.2V
 7. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
 8. WITHOUT BACKLIGHT
 9. CONTROLLER: S6A0069X01-C0CXX(KS0066UP00-CC)
 10. BEZEL IS TO BE PAINTED BLACK
 11. UNMARKED TOLERANCE: ±0.3mm
 12. THERE IS AN ADHESIVE DOUBLE TAPE BETWEEN PCB AND CABLE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{DD}	V _O	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	NC	NC

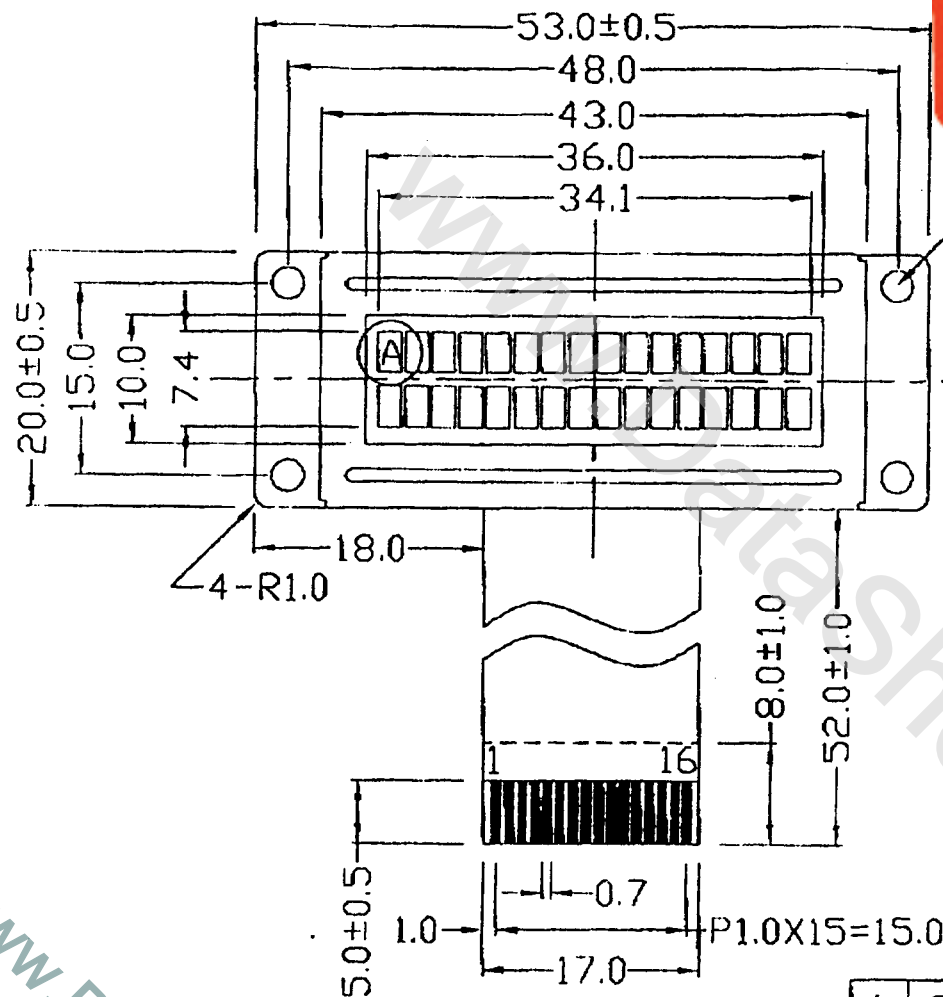

TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: W. H. W.

4 TITLE: TM162XAAU6

CHECKED BY: 潘世

DWG NO: G-1

APPROVED BY: F. J. [illegible]

DWG NAME: DWG21A06G-1

CONFIRMED BY: E-47 474-01

SCALE	
INCHES	FOOT

DATE	ITEM
ST NO	OF