




NOTES:

- 1.DISPLAY TYPE: STN/YELLOW GREEN MODE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.OPERATING TEMP: 0°C-50°C
- 5.STORAGE TEMP: -20°C-60°C
- 6.LCD OPERATING VOLTAGE: 4.2V
- 7.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 8.BACKLIGHT: LED
- 9.CONTROLLER: KS0066UP-00CC
- 10.UNMARKED TOLERANCE: ±0.3mm
- 11.BEZEL IS TO BE PAINTED BLACK
- 12.THERE IS AN ADHESIVE DOUBLE TAPE BETWEEN PCB AND CABLE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vdd	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

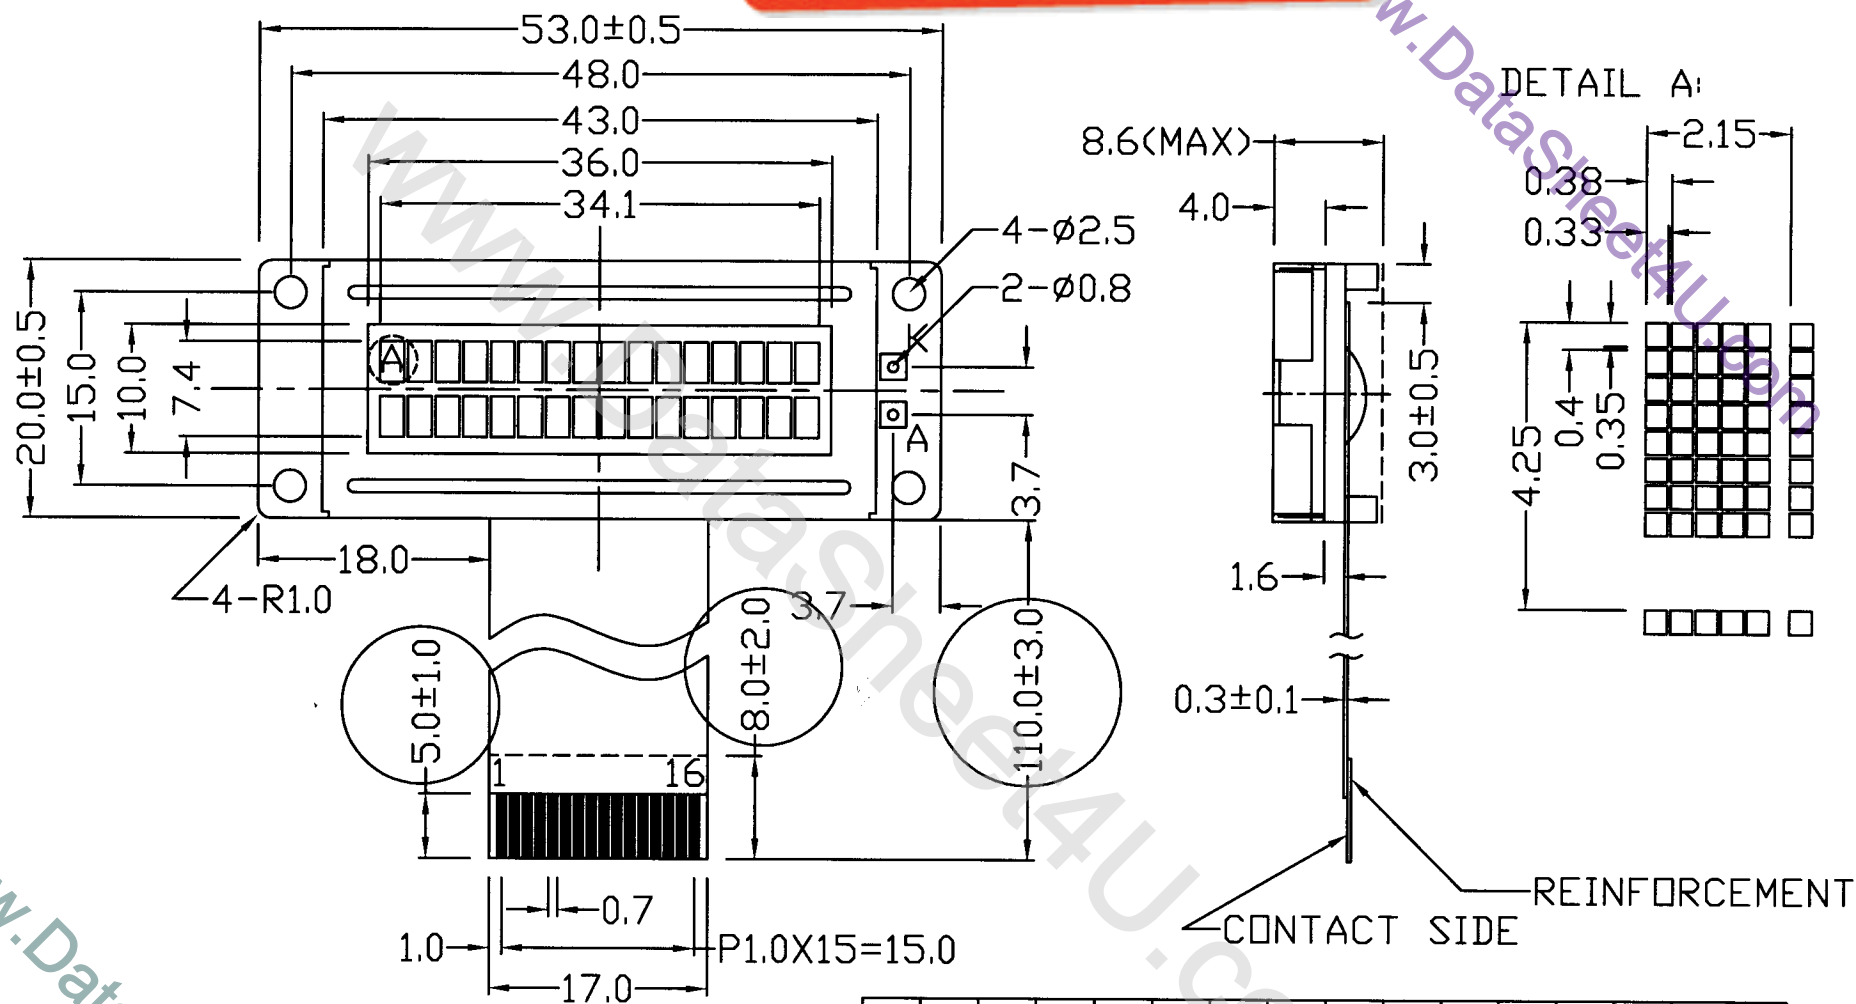

TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:

TITLE: TM162XBC7

CHECKED BY:

DWG NO: 16/7-2002

APPROVED BY:

DWG NAME:

CONFIRMED BY:

SHEET NO: OF



SCALE:

UNIT: mm