


液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)

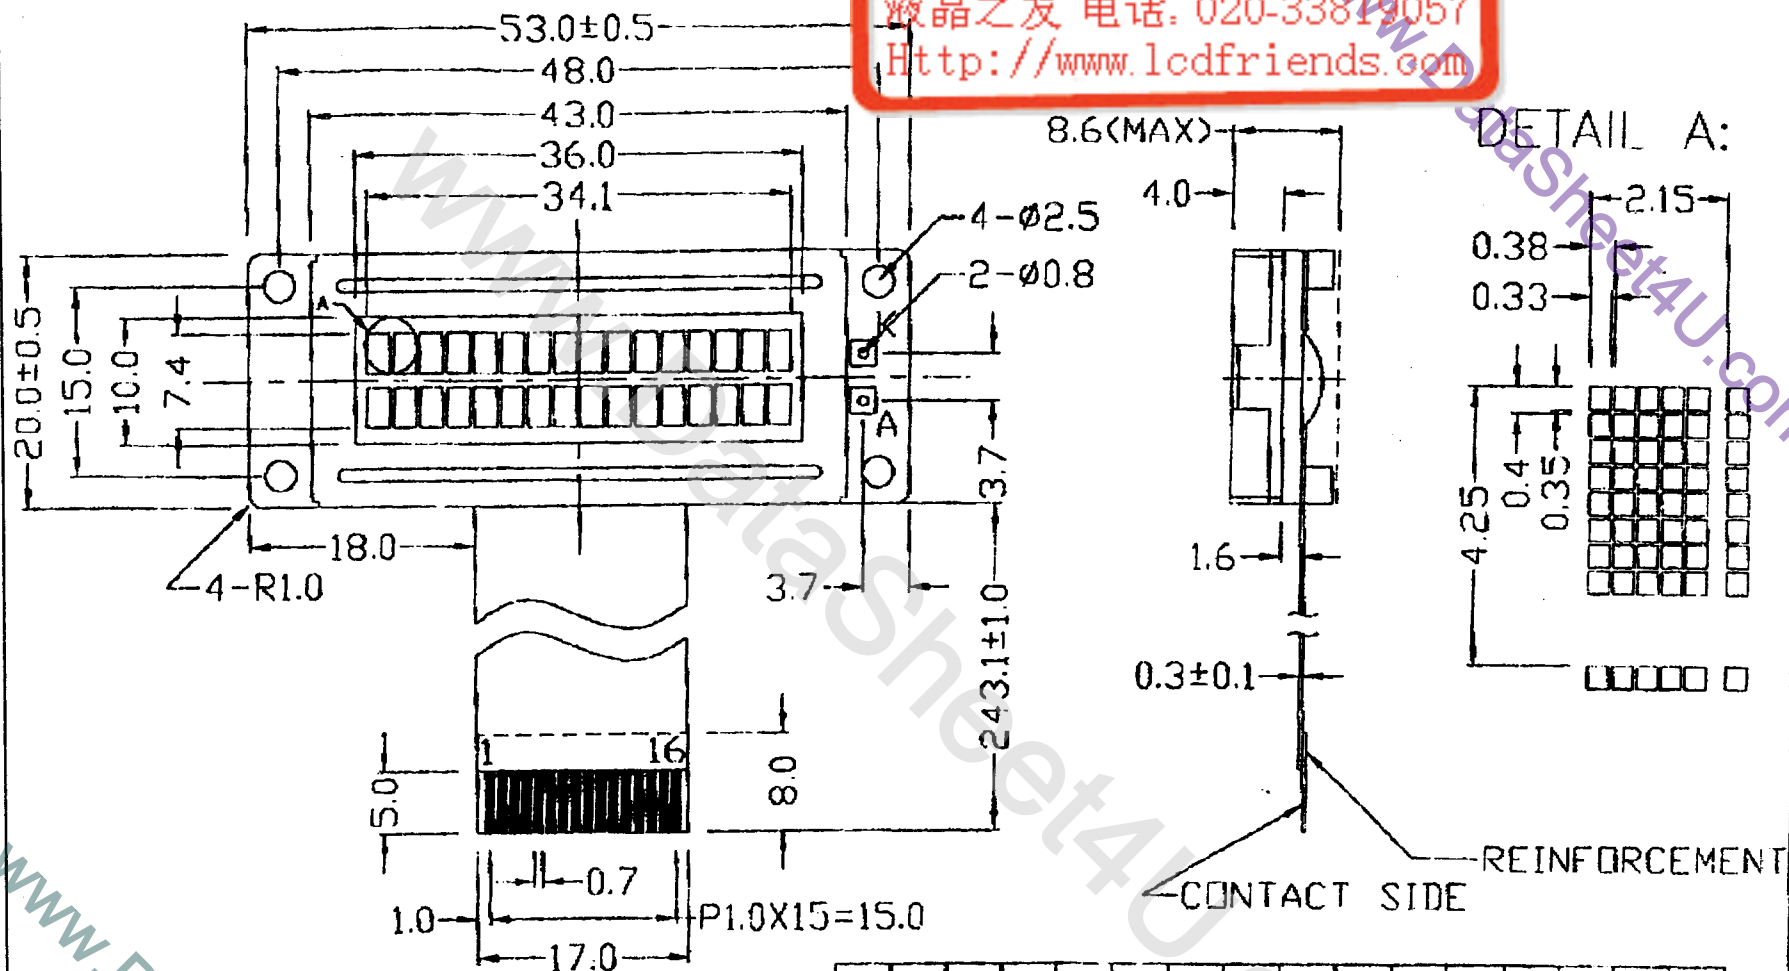

NOTES:

- 1.DISPLAY TYPE: STN/Y-G MODE
- 2.VIEWING DIRECTION: 12:00
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.OPERATING TEMP: 0°C-50°C
- 5.STORAGE TEMP: -20°C-60°C
- 6.LCD OPERATING VOLTAGE: 4.2V
- 7.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 8.CONTROLLER AND DRIVER: S6A0065B01-COCX+S6A0069X01-COCX
- 9.BACKLIGHT TYPE: LED
- 10.UNMARKED TOLERANCE: ±0.3mm
- 11.THERE IS AN ADHESIVE DOUBLE TAPE BETWEEN PCB AND CABLE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vdd	V0	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K



TIAN-MA MICROELECTRONICS CO.

6/F., CASTLE Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: <i>[Signature]</i>	TITLE: TM162XBCU7	SCALE:
CHECKED BY: <i>[Signature]</i>	ENG NO: G-2	UNIT: mm
APPROVED BY: <i>[Signature]</i>	DWG NAME: TIANMA162X-2	SHEET NO: 01
CONFIRMED BY: <i>[Signature]</i>		