


[Http://www.lcdfriends.com](http://www.lcdfriends.com)



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{DD}	V _O	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	EL1	EL2

- 1.DISPLAY TYPE: STN/BLUE MODE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSFLECTIVE/NEGATIVE
- 4.OPERATING TEMP: 0°C--+50°C
- 5.STORAGE TEMP: -20°C--+60°C
- 6.LCD OPERATING VOLTAGE: 4.8V
- 7.DRIVE METHOD: DUTY 1/16 BIAS 1/5
- 8.CONTROLLER: SPLC780A1-01C-C
- 9.ALL UNMARKED TOLERANCES: $\pm 0.3\text{mm}$
- 10.BACKLIGHT: EL(WHITE)
- 11.BEZEL IS TO BE PAINTED BLACK

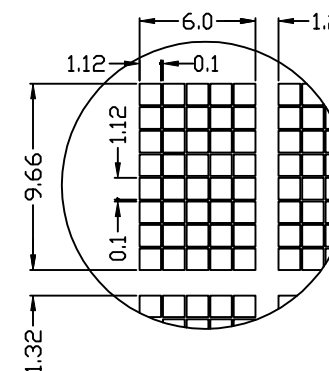

22/F., HANGDU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM202MFB6		
CHECKED BY:			
APPROVED BY:	DWG NO: G-3	SCALE:	
CONFIRMED BY:	DWG NAME: TM202MFB6G-3	SHEET NO: 0F	UNIT: mm