


液晶之友 电话: 020-33819057
http://www.lcdfriends.com

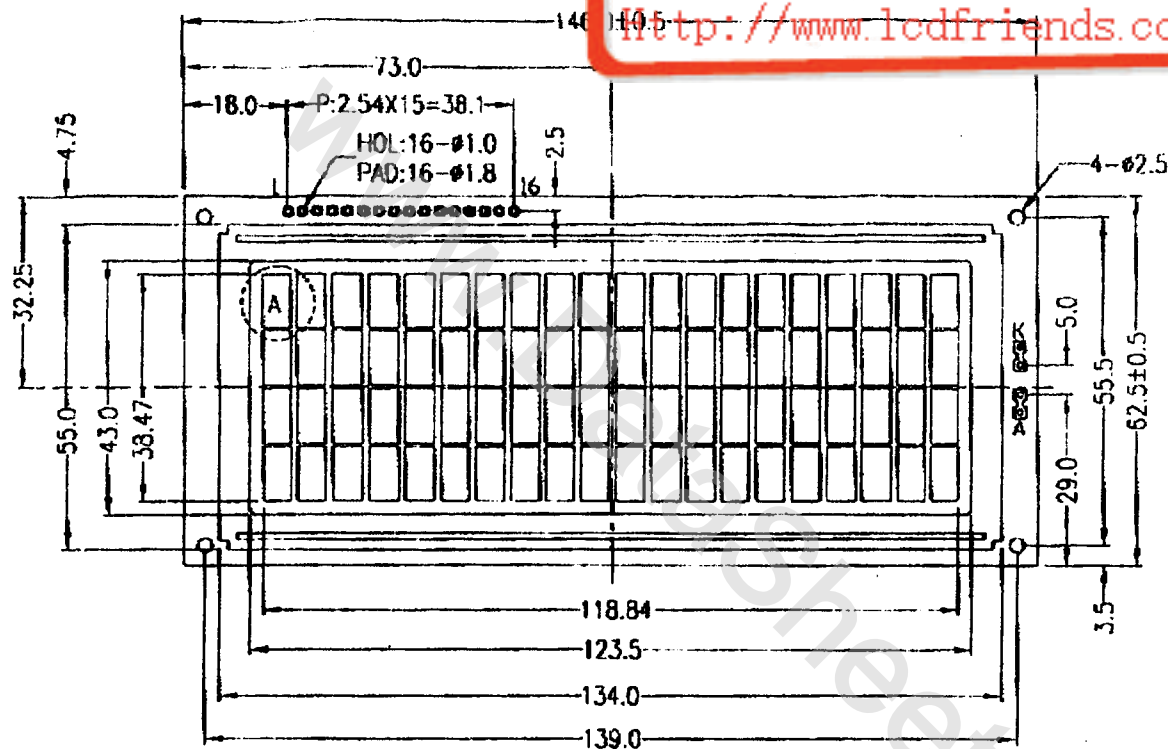


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
Vss	Vcc	Vo	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTES:

- 1.DISPLAY TYPE: STN/YELLOW GREEN MODE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSFLECTIVE/POSITIVE
- 4.DRIVE METHOD: 1/16 DUTY 1/5 BIAS
- 5.LCD OPERATING VOLTAGE: 4.6V
- 6.OPERATING TEMP: -20°C~+70°C
- 7.STORAGE TEMP: -30°C~+80°C
- 8.CONTROLLER: S6A0069X01-COCX(KS0066UP-00CC)
- 9.BACKLIGHT: LED
- 10.BEZEL IS TO BE PAINTED BLACK
- 11.UNMARKED TOLERANCES: ±0.3mm

DETAIL A:



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY: 李松

CHECKED BY: 李松

APPROVED BY: 李松

CONFIRMED BY: 李松

TITLE: TM204KBCW6

DWG NO: G-1

DWG NAME: TM204KBCW6-1

SHEET NO: 01



SCALE:

UNIT: mm