



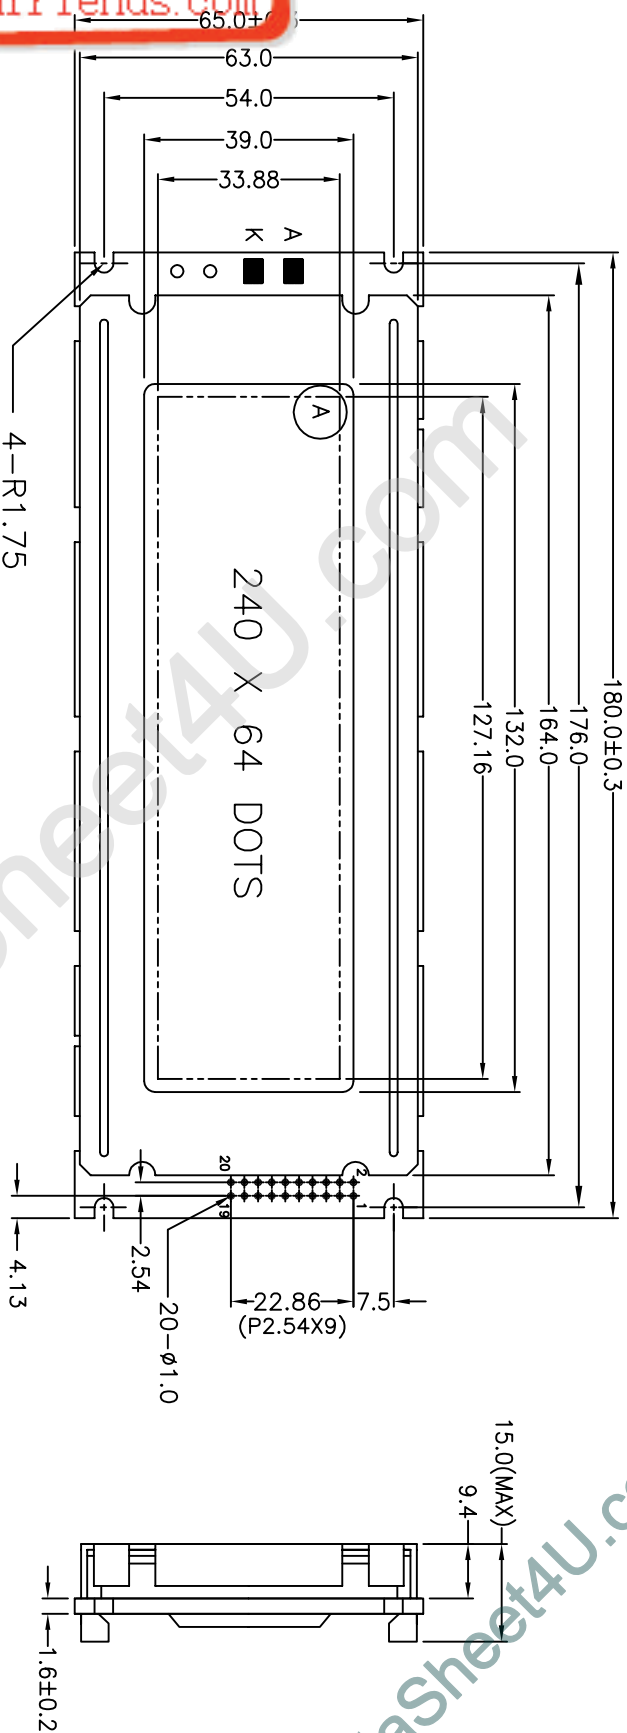

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
FG	Vss	Vcc	Vo	WR	RD	CE	C/D	NC	RESET	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	FS	NC

NOTES:

1. DISPLAY TYPE: STN/BLUE MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSPARENT/NEGATIVE
4. OPERATING TEMP.: 0°C-+50°C
5. STORAGE TEMP.: -20°C-+60°C
6. CONTROLLER: T6963C
7. LCD OPERATING VOLTAGE: 11.0V
8. LCD DRIVE METHOD: DUTY=1/64 BIAS=1/9
9. ALL UNMARKED TOLERANCES: ±0.3mm
10. BACKLIGHT TYPE: LED
11. BEZEL IS TO BE PAINTED BLACK



TIAN-MA MICROELECTRONICS CO.
6/F., CASTLE Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM24064BFC	SCALE:
CHECKED BY:	DWG NO: G-1	UNIT: mm
APPROVED BY:	DWG NAME: TM24064BFC-1	SHEET NO: 01
CONFIRMED BY:		