




1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VDD	VSS	NC	RES	$\overline{CS}$	A0	$\overline{WR}$	$\overline{RD}$	D0	D1	D2	D3	D4	D5	D6	D7	SEL	VR1	VR2	NC

NOTES:

1. DISPLAY TYPE: STN/GREY MODE
2. VIEWING DIRECTION: 6:00
3. DRIVER METHOD: 1/64 DUTY 1/9 BIAS
4. POLARIZER MODE: TRANSLLECTIVE/POSITIVE
5. LCD OPERATING VOLTAGE: 5.0V
6. OPERATING TEMP: -20°C-+70°C
7. STORAGE TEMP: -30°C-+80°C
8. CONTROLLER: SED1335FDA
9. BACKLIGHT: EL(GREEN,100V,400HZ)
10. UNMARKED TOLERANCE: ±0.3mm
11. FRAME MATERIAL: STAINLESS STEEL

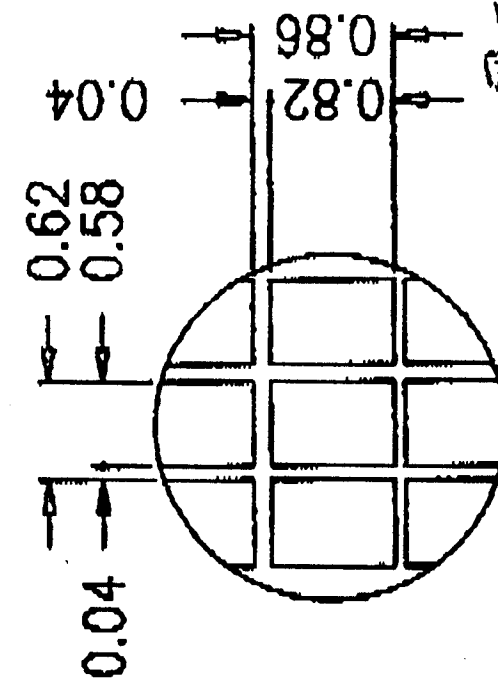

TIAN-MA MICROELECTRONICS CO.

6/F., EASTIC Building, Sherman Road, Central, Shenzhen, China

DRAWN	BY: <i>W. J. J.</i>	DATE: <i>12/10/04</i>	TYPE: TM24064FDBW		
CHECKED	BY: <i>W. J. J.</i>	DATE: <i>12/10/04</i>		SCALE	
APPROVED	BY: <i>W. J. J.</i>	DATE: <i>12/10/04</i>	DWG NO: C-2	UNIT:	mm
CONFIRMED BY:			DWG NAME: 1824064FDBW-2	SHEET NO:	OF