



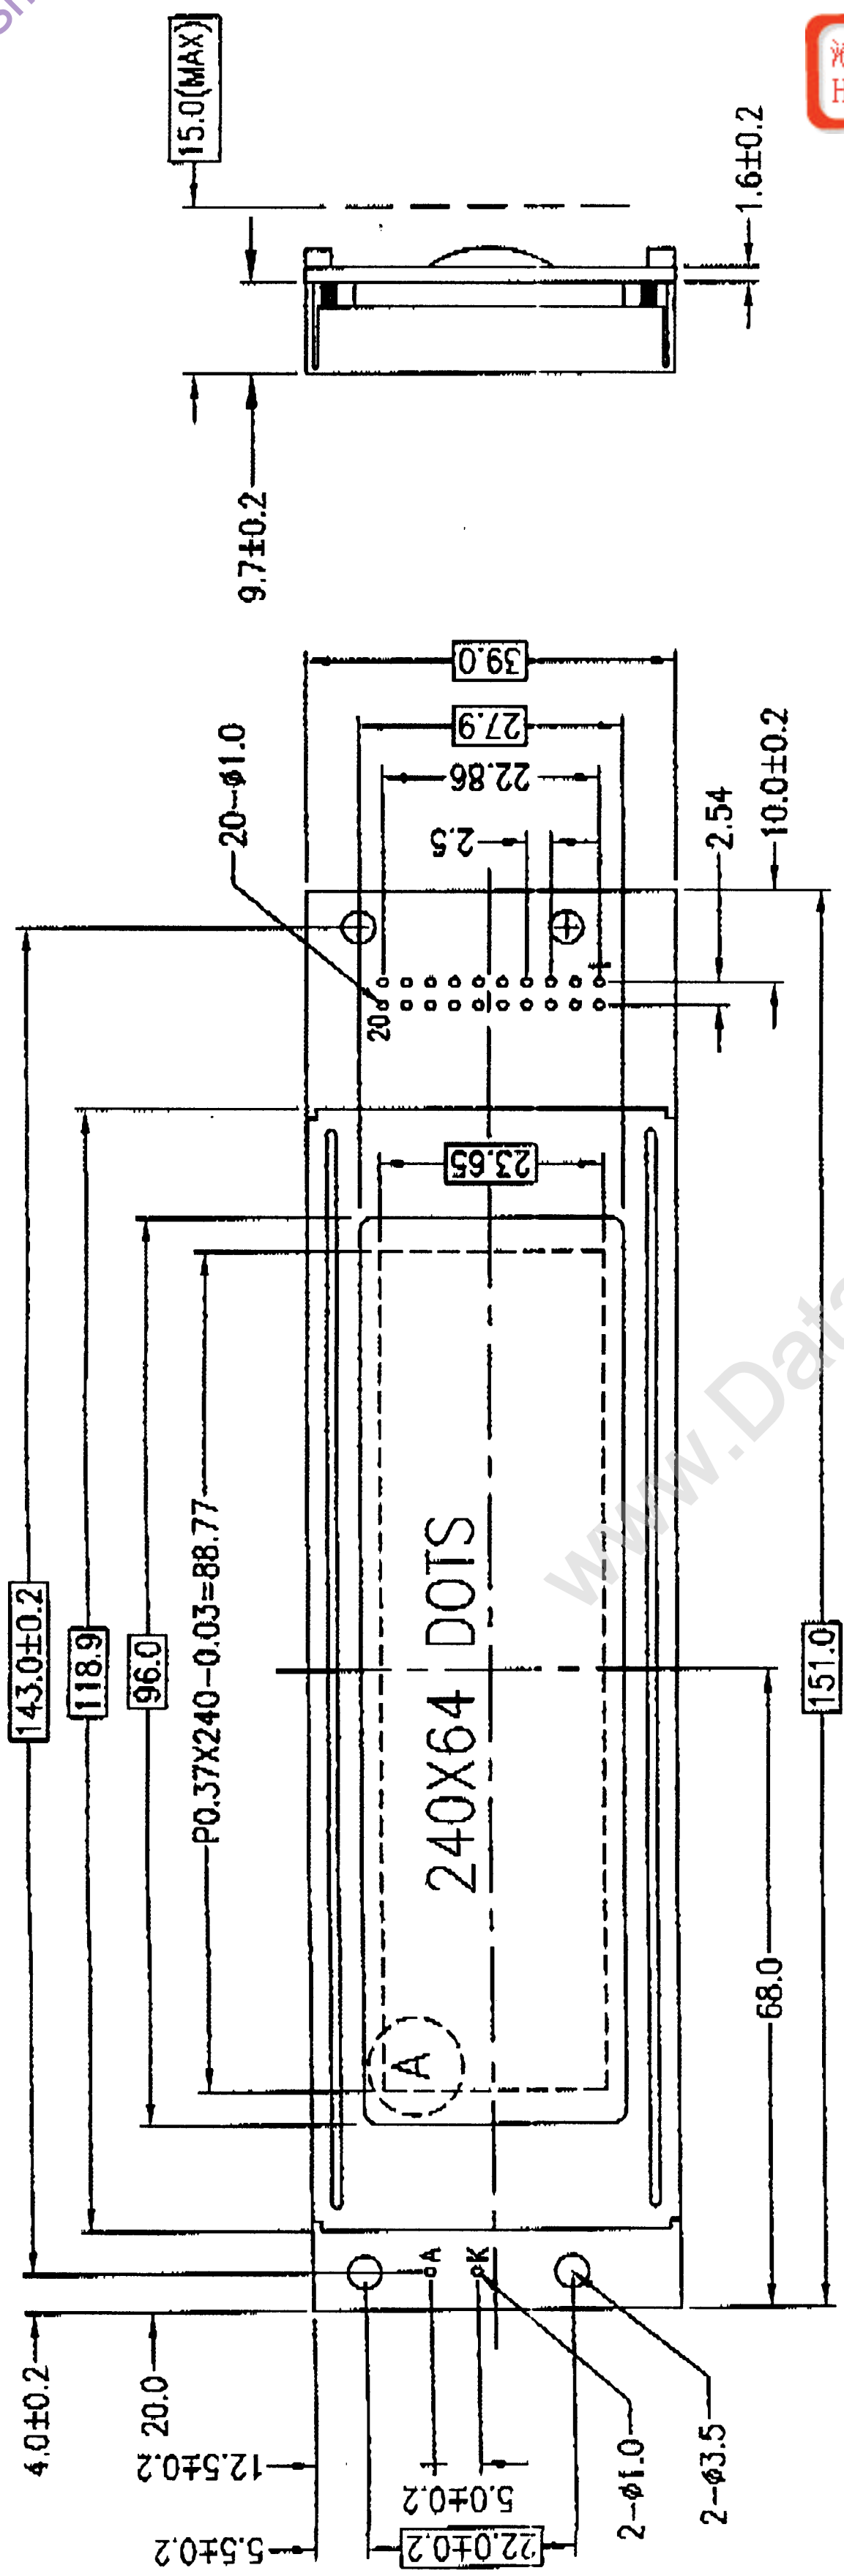

液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

DETAIL A:

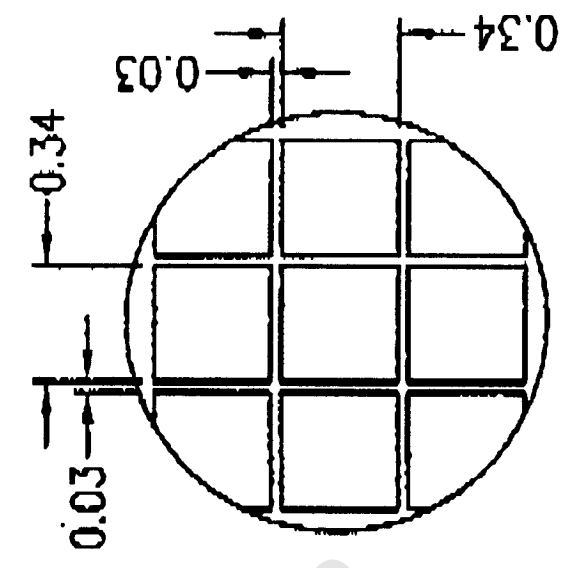

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
VSS	VDD	RS	R/W	E	D7	D6	D5	D4	D3	D2	D1	D0	CS1	CS2	CS3	CS4	RES	K	A

- NOTES:
1. DISPLAY TYPE: FSTN
 2. VIEWING DIRECTION: 12:00
 3. POLARIZER MODE: TRANSELECTIVE/POSITIVE
 4. DRIVE METHOD: 1/64 DUTY 1/9 BIAS
 5. LCD OPERATING VOLTAGE: 11.0V
 6. OPERATING TEMP: -20°C~+70°C
 7. STORAGE TEMP: -30°C~+80°C
 8. CONTROLLER: S6B0108A01-COCX
 9. BACKLIGHT: LED
 10. BEZEL IS TO BE PAINTED BLACK
 11. UNMARKED TOLERANCE: ±0.3mm



TIAN-MA MICROELECTRONICS CO.
6/F., CASTIC Building, Sherman Road, Central, Shenzhen, China

DRAWN BY: 李达 1/8-04	TITLE: TM24064QCCWU6	SCALE: 1:1	UNIT: mm
CHECKED BY: 李达 1/8-04	DWG NO: G-1		
APPROVED BY: 李达 1/8-04			
CONFIRMED BY:	DWG NAME: TM24064QCCWU6-1	SHEET NO: 1 OF 1	