
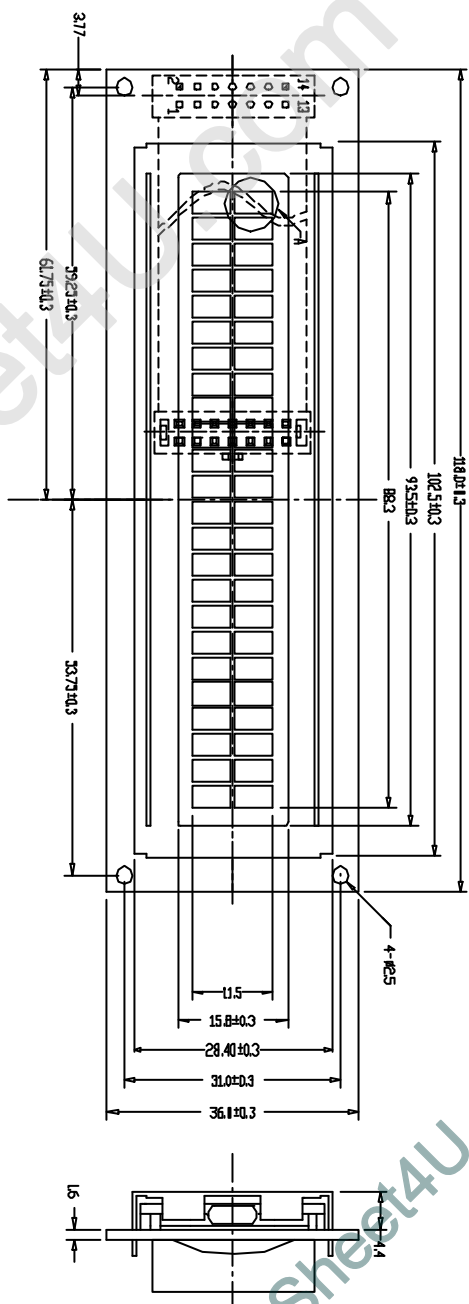


液晶之友 电话: 020-33819057
Http://www.lcdfriends.com


NOTE:

- | | |
|---|---------------------|
| 1. DISPLAY/TYPE: | STN/ GREY MODE |
| 2. VIEWING DIRECTION: | 6:00 |
| 3. POLARIZER MODE: | REFLECTIVE/POSITIVE |
| 4. DRIVE METHOD: | 1/16 DUTY 1/5 BIAS |
| 5. LCD OPERATING VOLTAGE: | 4.7V(5.5V(MAX)) |
| 6. VDD=5.0V | |
| 7. OPERATING TEMP: | -20°C-+70°C |
| 8. STORAGE TEMP: | -30°C-+80°C |
| 9. CONTROLLER: | SGA0069X01-C0CX |
| 10. WITHOUT BACKLIGHT | |
| 11. BEZEL IS TO BE PLATED NI AND CONNECTED TO VSS AND THROUGH COPPERED MOUNTING HOLES | |
| 12. UNMARKED TOLERANCE: | ±0.3mm |

1	2	3	4	5	6	7	8	9	10	11	12	13	14
Vss	Vcc	Vee	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7

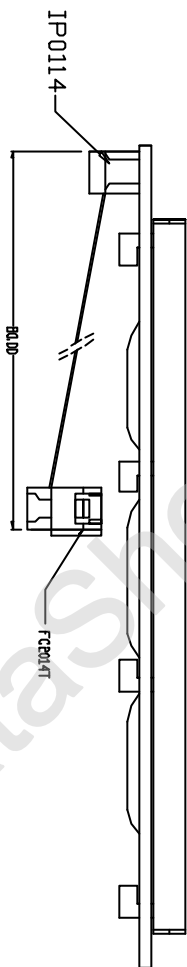

DETAIL A:



TIAN-MA MICROELECTRONICS CO.

22/F., CASTIC Building, Sherman Road, Central, Shenzhen, China

DRAWN BY:	TM242ADAW/8
-----------	-------------

CHECKED BY:
--

APPROVED BY: JMG NO: 6-2

CONFIRMED BY:	DWG NAME: TPE42ADNV8 G-2	SHEET NO: 1 OF 1
---------------	--------------------------	------------------