



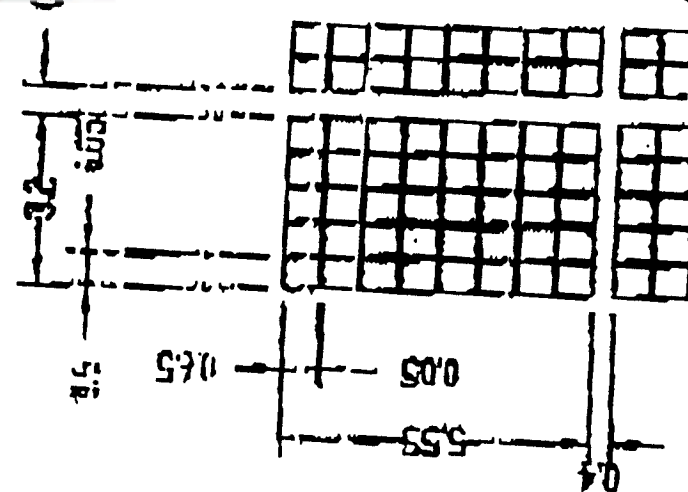

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{CC}	V _{ee}	R _S	R _{TH}	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

LETTER

1. DISPLAY TYPE: TN
2. VIEWING DIRECTION: 600
3. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
4. LCD OPERATING VOLTAGE: 4.3V
5. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
6. OPERATING TEMP: 0°C-+50°C
7. STORAGE TEMP: -20°C-+60°C
8. CONTROLLER: S6A0069X01-CDCX
9. BACKLIGHT TYPE: LED(YELLOW)
10. BEZEL IS TO BE PAINTED BLACK
11. UNMARKED TOLERANCE: ±0.3mm



TIAN-MA MICROELECTRONICS CO.

4/F.: CASTIC Building, Sherman Road, Central, Shenzhen, China

DRAWN BY: 丁曉天 15/11/94

CHECKED BY: *[Signature]*

APPROVED BY: *[Signature]*

CONFIRMED BY:

THE TM242AEF6

DOC NO: G-2

DOC NAME TR24NFE5-2	SHEET NO. 1 OF 1
---------------------	------------------