

RF AMPLIFIER

MODEL *TM3004*

Available as: TM3004, 4 Pin TO-8 (T4)
TN3004, 4 Pin Surface Mount (SM3)
BX3004, Connectorized Housing (H1)

Features

- High Gain: 22.8 dB Typical
- Low Noise Figure: 1.8 dB Typical
- Operating Temp. - 30 °C to + 55 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -30 °C to +55 °C
Frequency	225 - 400 MHz	225 - 400 MHz
Gain (dB)	22.8	22.0 Min.
Power @ 1 dB Comp. (dBm)	+6.5	+5.5 Min.
Reverse Isolation (dB)	-26	-25 Max.
VSWR In	<1.25:1	2.0:1 Max.
Out	<1.25:1	2.0:1 Max.
Noise Figure (dB)	1.8	2.5 Max.
Power Vdc	+15	+15
mA	15	16 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point.....+26 dBm (Typ.)
Second Order Two Tone Intercept Point.....+20 dBm (Typ.)
Third Order Two Tone Intercept Point.....+18 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
Storage Temperature -62°C to + 125 °C
Case Temperature + 125 °C
DC Voltage + 18 Volts
Continuous RF Input Power + 13 dBm
Short Term RF Input Power..... 50 Milliwatts (1 Minute Max.)
Maximum Peak Power..... 0.5 Watt (3 µsec Max.)

Typical Performance Data

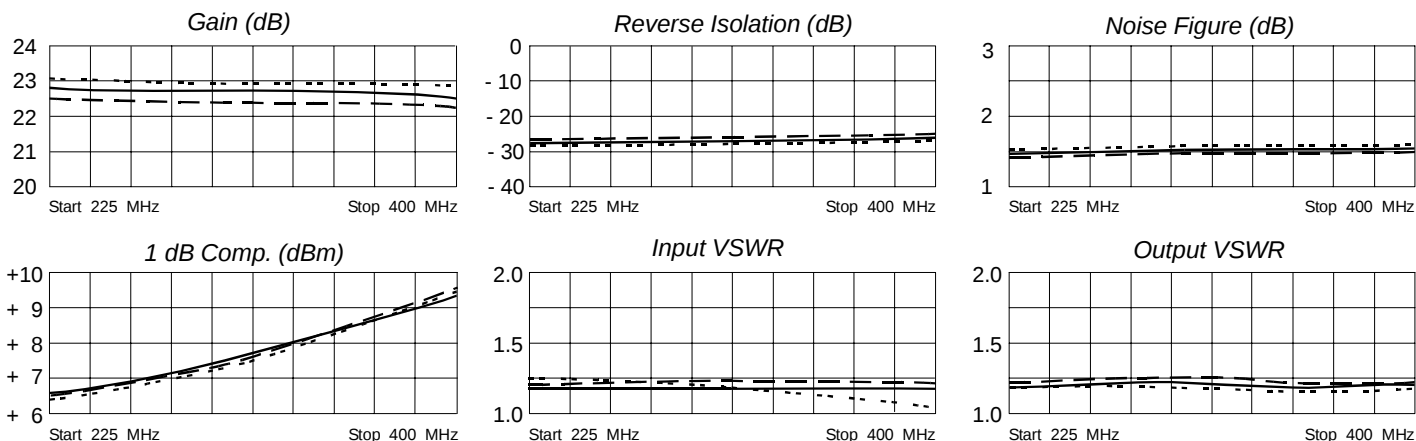

Legend ——— + 25 °C - - - - + 55 °C -30 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
200	.08	26	13.85	113	.04	- 6	.09	- 28
225	.08	13	13.70	105	.04	- 9	.10	- 42
250	.09	3	13.63	96	.04	- 9	.10	- 55
300	.09	- 22	13.49	80	.05	-12	.11	- 87
350	.10	- 50	13.42	62	.05	-17	.10	-125
400	.10	- 83	13.29	42	.05	-19	.09	175
450	.10	-122	12.88	20	.05	-25	.14	107
500	.10	-167	11.80	- 3	.06	-33	.24	57

www.DataSheet4U.com



www.spectrummicrowave.com

Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

05/10/04

Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001

www.DataSheet4U.com