

RF AMPLIFIER

MODEL *TM3023*

Available as: TM3023, 4 Pin TO-8 (T4)
 TN3023, 4 Pin Surface Mount (SM3)
 FP3023, 4 Pin Flatpack (FP4)
 BX3023, Connectorized Housing (H1)

Features

- High Gain: 29 dB Typical
- Low Noise Figure: <1.8 dB Typical
- Operating Temp. -55 °C to + 85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	100 - 200 MHz	100 - 200 MHz
Gain (dB)	29	27 Min.
Power @ 1 dB Comp. (dBm)	+12.5	+10 Min.
Reverse Isolation (dB)	-33	-31 Max.
VSWR In	<1.25:1	2.0:1 Max.
Out	<1.60:1	2.0:1 Max.
Noise Figure (dB)	<1.8	2.0 Max.
Power Vdc	+15	+15
mA	15	17 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point..... +31 dBm (Typ.)
 Second Order Two Tone Intercept Point..... +26 dBm (Typ.)
 Third Order Two Tone Intercept Point..... + 24 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 6 dBm
 Short Term RF Input Power 20 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.1 Watt (3 µsec Max.)

Typical Performance Data

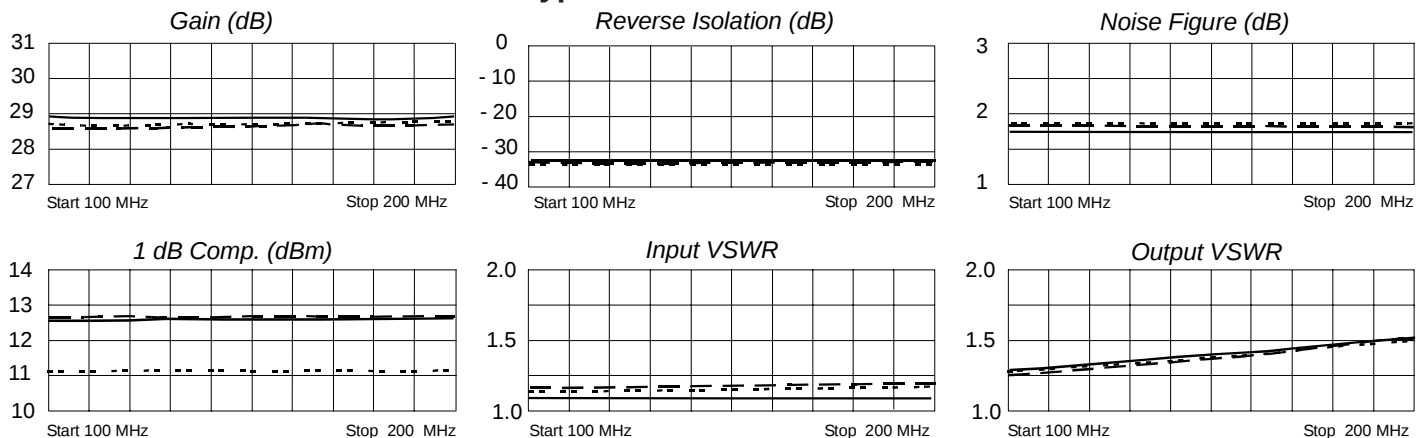

Legend ——— + 25 °C - - - - + 85 °C -55 °C

Linear S-Parameters

Freq. MHz	---S11---		---S21---		---S12---		---S22---	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
120	.02	22	25.87	122	.0188	-13	.09	-105
140	.04	24	25.66	112	.0207	-14	.1	-114
160	.05	9	25.49	102	.0186	-17	.13	-125
180	.06	-6	25.42	92	.0195	-15	.15	-135
200	.09	-21	25.31	82	.0202	-21	.16	-145

www.DataSheet4U.com



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 05/10/05

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001
 www.DataSheet4U.com