

RF AMPLIFIER

MODEL *TM3095*

Available as: TM3095, 4 Pin TO-8 (T4)
 TN3095, 4 Pin Surface Mount (SM3)
 FP3095, 4 Pin Flatpack (FP4)
 BX3095, Connectorized Housing (H1)

Preliminary

Features

- Lower Noise Figure: 2.8 dB Typical
- Operating Temp. - 55 °C to + 85 °C
- Environmental Screening Available
- Phase Matched to a Standard Unit

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	1200 - 1800 MHz	1200 - 1800 MHz
Gain (dB)	11	10 Min.
Power @ 1 dB Comp. (dBm)	+18.5	+17.5 Min.
Reverse Isolation (dB)	-16	-15 Max.
VSWR In	1.5:1	2.0:1 Max.
Out	1.5:1	2.0:1 Max.
Noise Figure (dB)	2.8	3.5 Max.
Power Vdc	+15	+15
mA	85	95 Max.
Phase Matched Against a Standard Unit (deg.)	-	+/- 5.0

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point +45 dBm (Typ.)
 Second Order Two Tone Intercept Point +40 dBm (Typ.)
 Third Order Two Tone Intercept Point +30 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

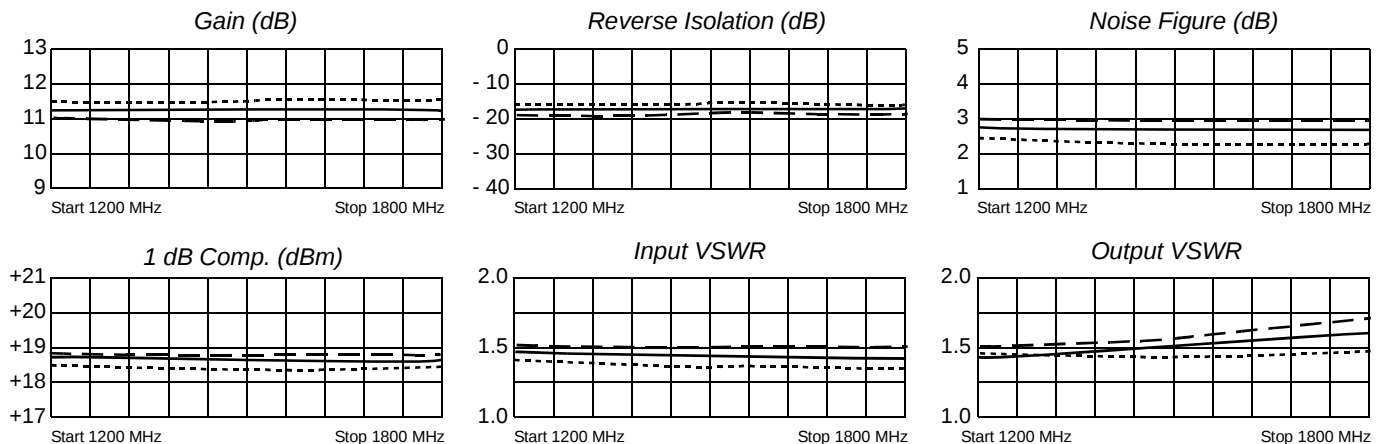

Legend ——— + 25 °C - - - + 85 °C -55 °C

www.DataSheet4U.com



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 02/17/05

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001

www.DataSheet4U.com