


液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

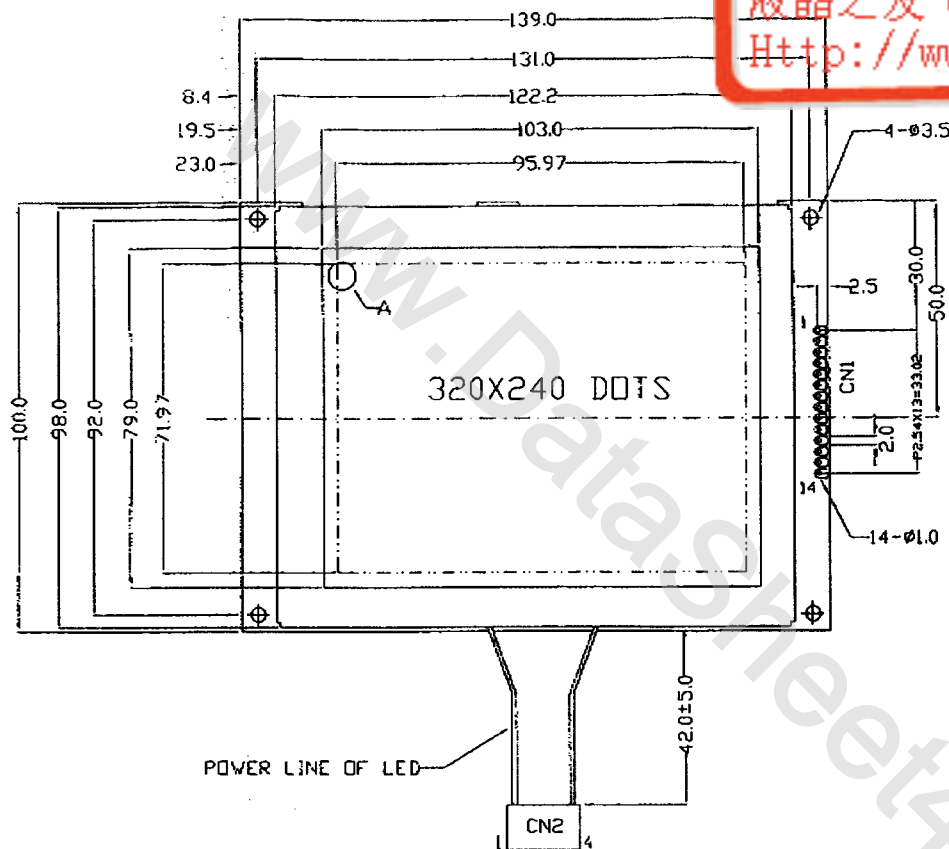

1	FLM
2	LP
3	CP
4	M
5	VADJ
6	VCC
7	VSS
8	VEE
9	D0
10	D1
11	D2
12	D3
13	Doff
14	NC

1	A
2	NC
3	NC
4	K

NOTES:

- | | |
|--|------------------------|
| 1. DISPLAY TYPE: | FSTN MODE |
| 2. VIEWING DIRECTION: | 6: 00 |
| 3. POLARIZER MODE: | TRANSFLECTIVE/POSITIVE |
| 4. OPERATING TEMP.: | 0°C-50°C |
| 5. STORAGE TEMP.: | -20°C-60°C |
| 6. LCD OPERATING VOLTAGE: | 2.5 4V |
| 7. DRIVE METHOD: | 1/240 DUTY 1/16 BIAS |
| 8. DRIVER: | S6B2086X01-TORA |
| 9. BACKLIGHT: | LED (4.0VDC WHITE) |
| 10. ALL UNMARKED TOLERANCES: | ±0.3mm |
| 11. BEZEL IS TO BE PAINTED WITH ZINC(WHITE) | |
| 12. BACKLIGHT CONNECTOR(CN2): | 1L-G-4S-S3C2 JAE |

FSTN MODE

6: 00

TRANSFLECTIVE/POSITIVE

0°C-50°C

-20°C-60°C

25. 4%

1/240 DUTY 1/16 BIAS

S6B2086X01-TORA


LED (4.0VDC WHITE)

ES: $\pm 0.3\text{mm}$

0 WITH ZINC(WHITE)

N2): IL-G-4S-S3C2 JAE

DETAIL A:



TIAN-MA MICROELECTRONICS CO.

22/F., HANGOU Building, Shenzhen Road, Central, Shenzhen, China

DRAWN BY: 64-102/ds-0 TITLE: INSTRUMENTAL

CHECKED BY: W. H. [Signature]

APPROVED BY:  DWG NO: G-1

SCALE:	
DATE:	10/10/10