


液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

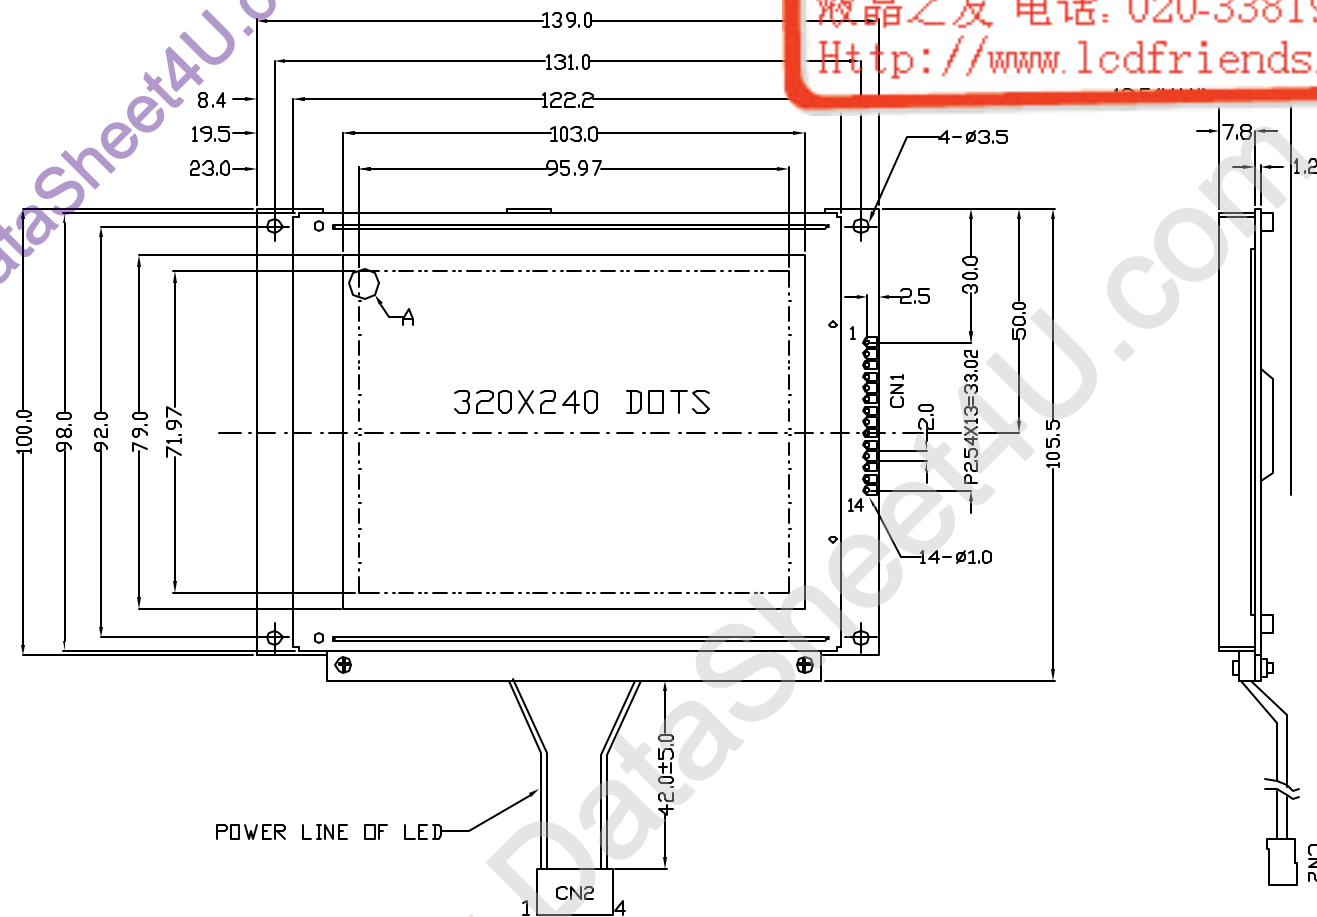

CN1

1	FLM
2	LP
3	CP
4	M
5	VADJ
6	VCC
7	VSS
8	VEE
9	D0
10	D1
11	D2
12	D3
13	Doff
14	NC


CN2

1	A
2	NC
3	NC
4	K

NOTES:

- 1.DISPLAY TYPE: STN/BLUE MODE
- 2.VIEWING DIRECTION: 6:00
- 3.POLARIZER MODE: TRANSMISSIVE/NEGATIVE
- 4.OPERATING TEMP.: 0°C-50°C
- 5.STORAGE TEMP.: -20°C-60°C
- 6.VDD: 5.0V
- 7.LCD OPERATING VOLTAGE: 25.4V
- 8.DRIVE METHOD: 1/240 DUTY 1/16 BIAS
- 9.DRIVER: S6B2086X01-TORA
- 10.BACKLIGHT: LED(4.0V WHITE)
- 11.ALL UNMARKED TOLERANCES:±0.3mm
- 12.BEZEL IS TO BE PAINTED WITH ZINC(WHITE)
- 13.BACKLIGHT CONNECTOR(CN2): IL-G-4S-S3C2 JAE

DETAIL A:



TIAN-MA MICROELECTRONICS CO.

22/F., HANGOU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM320240BFF-1	
CHECKED BY:		
APPROVED BY:		
CONFIRMED BY:		
	DWG NO: G-1	SCALE:
	DWG NAME: TM320240BFF-1G-1	UNIT: mm
	SHEET NO: 1 OF 1	