




PIN ASSIGNMENT ONE		PIN ASSIGNMENT TWO	
PIN NO.	SYMBOL	PIN NO.	SYMBOL
1	D0	1	CFL HOT
2	D1	2	N.C.
3	D2	3	N.C.
4	D3	4	CFL GND
5	DISP OFF	PIN ASSIGNMENT THREE	
6	FLM	PIN NO.	SYMBOL
7	N.C.	1	Top
8	LP	2	Right
9	CP	3	Button
10	Vcc	4	Left
11	Vss		
12	Vee		
13	Vadj		
14	FG		

- NOTES:
- 1.DISPLAY TYPE: STN/BLUE
 - 2.VIEWING DIRECTION: 6:00
 - 3.POLARIZER MODE: TRANSMISSIVE/NEGATIVE
 - 4.OPERATING TEMP: 0°C~+50°C
 - 5.STORAGE TEMP: -20°C~+60°C
 - 6.LCD OPERATING VOLTAGE: 22.6V
 - 7.DRIVE METHOD: 1/240 DUTY 1/16 BIAS
 - 8.UNMARKED TOLERANCE: ±0.3mm
 - 9.BACKLIGHT TYPE: CCFL
 - 10.IC: KS0086TQ
 - 11.BEZEL IS TO BE PAINTED WITH ZINC(WHITE)

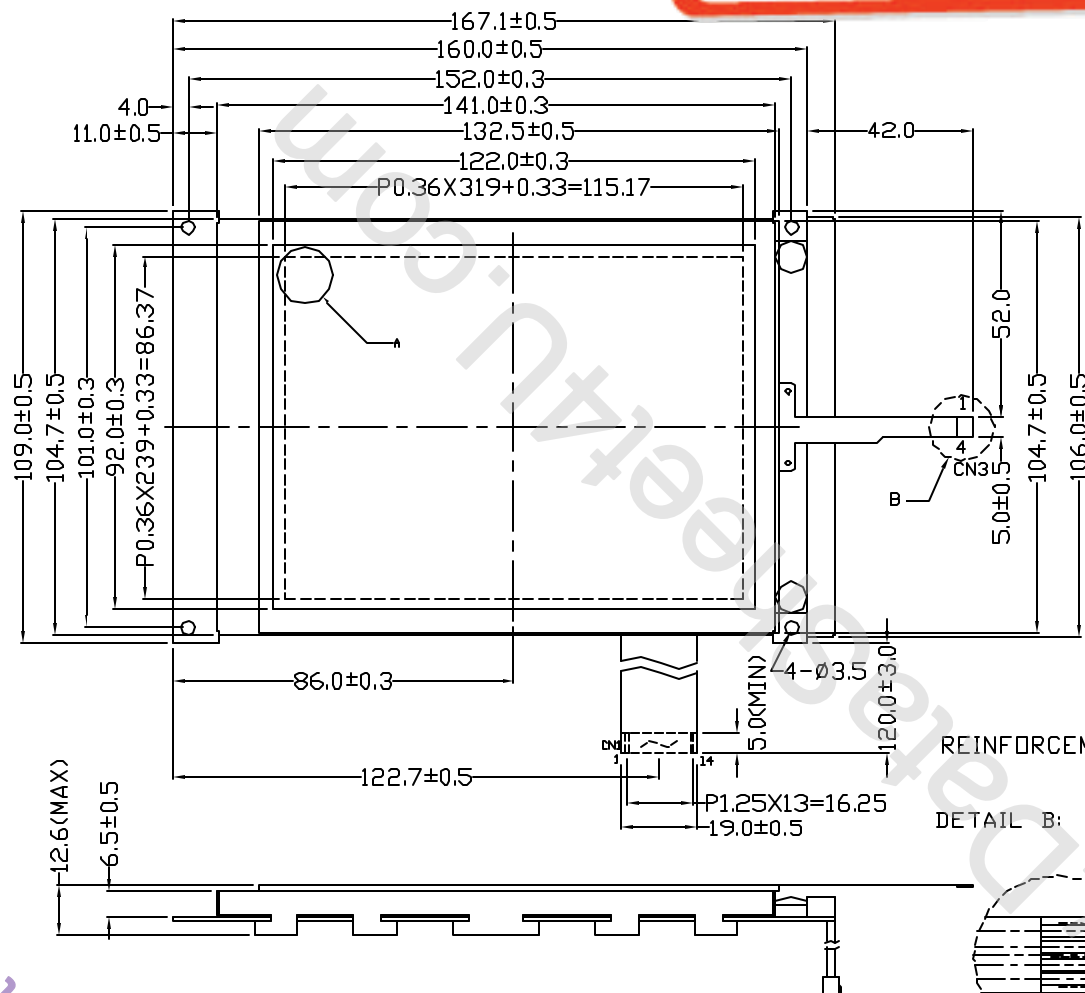

TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:	TITLE: TM320240DFG1	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME: TM320240DFG1G-1	SCALE
CONFIRMED BY:	SHEET NO: 01	UNIT: mm