


[Http://www.lcdfriends.com](http://www.lcdfriends.com)

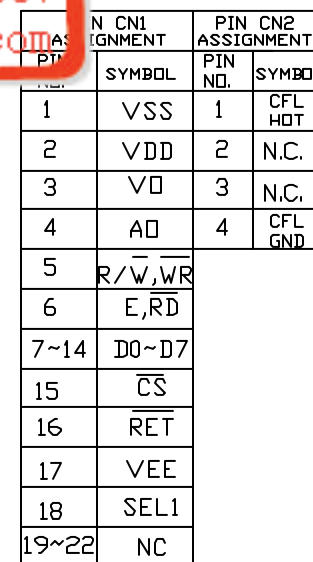

1.DISPLAY TYPE: STN or FSTN
2.VIEWING DIRECTION: 6:00 or 12:00
3.POLARIZER MODE: REFLECTIVE or TRANSFLECTIVE
4.OPERATING TEMP: NORMAL or WIDE
5.STORAGE TEMP: NORMAL or WIDE
6.LCD OPERATING VOLTAGE: 22.6V
7.DRIVE METHOD: 1/240 DUTY 1/16 BIAS
8.UNMARKED TOLERANCE: $\pm 0.3\text{mm}$
9.BACKLIGHT TYPE: NONE, CCFT, or LED
10.CONTROLLER IS SED1335F

DETAIL A:

0.36
0.33
0.36
0.33



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:

BY

TITLE: TM320240E



CHECKED BY:

BY

DWG NO:	G-1
---------	-----

	SCALE:
--	---------------

APPROVED BY:

EY

DWG NAME: TW3ED240EFGG-1	SHEET NO: 01
--------------------------	--------------

1	SHEET NO. OF
---	--------------