


液晶之友 电话: 020-33819057
Http://www.lcdfriends.com

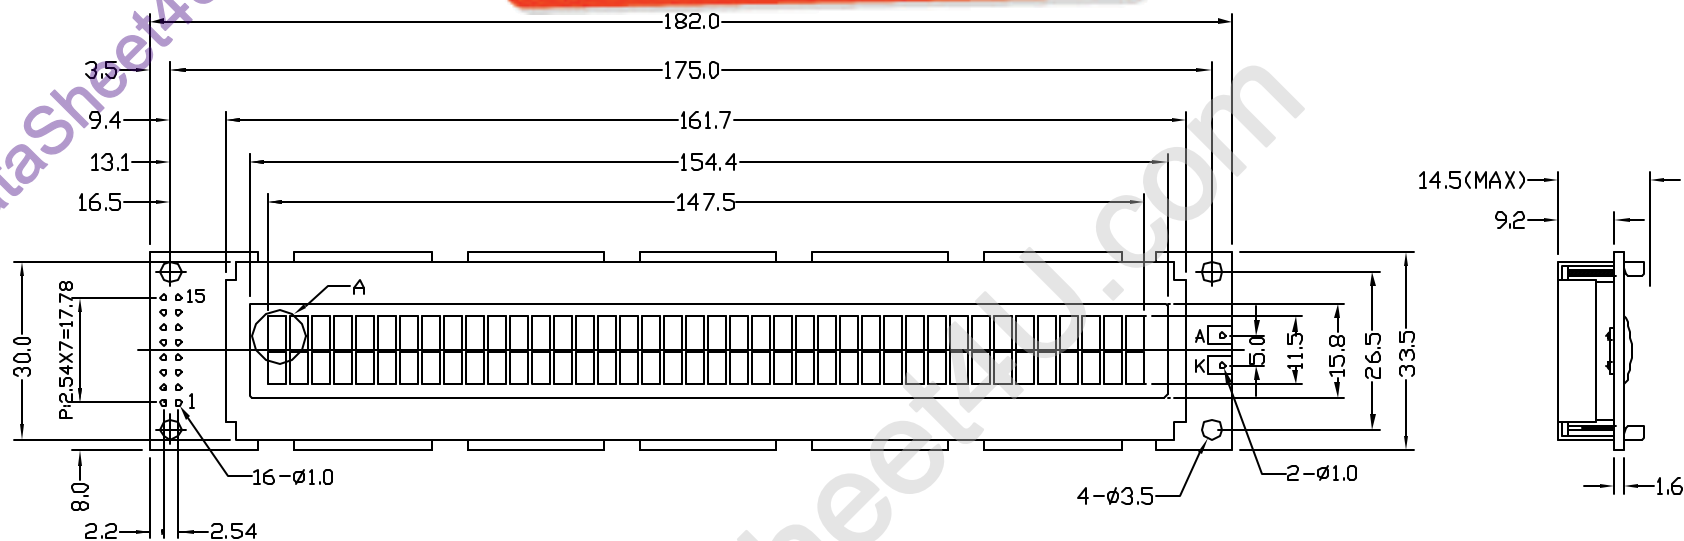


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
VSS	VCC	Vo	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

NOTES:

1. DISPLAY TYPE: STN/BLUE MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
4. OPERATING TEMP: 0°C~+50°C
5. STORAGE TEMP: -20°C~+60°C
6. LCD OPERATING VOLTAGE: 4.7V
7. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
8. BACKLIGHT: LED(ALWAYS BE LIGHTED/BOTTOM LIGHT)
9. CONTROLLER: SPLC780A1-01C-C
10. UNMARKED TOLERANCE: ±0.3mm
11. BEZEL IS TO BE PAINTED BLACK

DETAIL A:

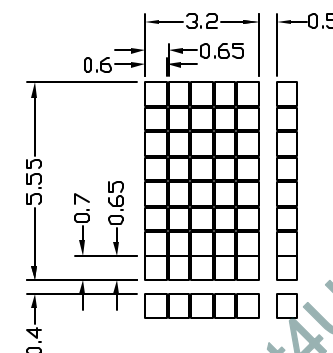

TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Shennan Road, Central, Shenzhen, China.

DRAWN BY:	TITLE: TM402GFF7	
CHECKED BY:	DWG NO: G-1	
APPROVED BY:	DWG NAME: TM402GFF7G-L	
		SHEET NO: 01