

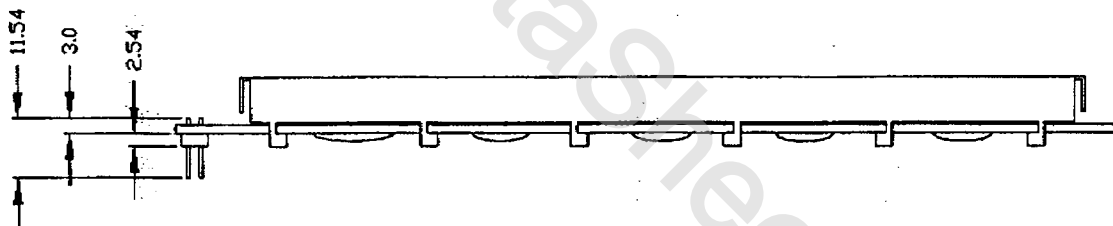
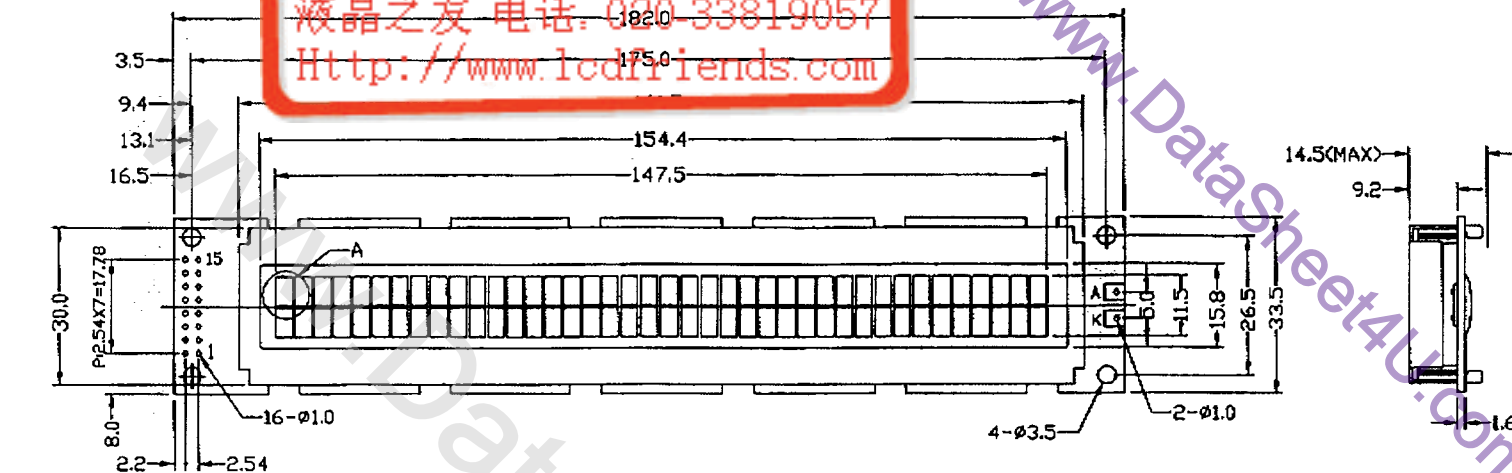


液晶之友 电话: 020-33819057
[Http://www.lcdfriends.com](http://www.lcdfriends.com)



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
V _{SS}	V _{CC}	V _O	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	A	K

DETAIL A:



NOTES:

1. DISPLAY TYPE: STN/BLUE MODE
2. VIEWING DIRECTION: 6:00
3. POLARIZER MODE: TRANSMISSIVE/NEGATIVE
4. OPERATING TEMP: 0°C~+50°C
5. STORAGE TEMP: -20°C~+60°C
6. LCD OPERATING VOLTAGE: 4.7V
7. DRIVE METHOD: 1/16 DUTY 1/5 BIAS
8. BACKLIGHT: LED
9. CONTROLLER: SPLC780A1-01C-C
10. UNMARKED TOLERANCE: ±0.3mm
11. BEZEL IS TO BE PAINTED BLACK



TIAN-MA MICROELECTRONICS CO.

6/F., CASTIC Building, Sherman Road, Central, Shezhen, China

DRAWN BY: *[Signature]*
 CHECKED BY: *[Signature]*
 APPROVED BY: *[Signature]*
 CONFIRMED BY:

TITLE: TM402GFF9
 DWG NO: G-1
 DWG NAME: TM402GFF9G-1

UNIT: mm
 SCALE
 SHEET NO: 1 OF 1