



N-channel MOSFET

Features

- Low gate charge
- 100% avalanche tested
- Improved dv/dt capability
- RoHS compliant
- JEDEC Qualification

BV_{DSS}	I_D	$R_{DS(on)}$
800V	8A	< 1.4 Ω



Device	Package	Marking	Remark
TMAN8N80	TO-3PN	TMAN8N80	RoHS

Absolute Maximum Ratings

Parameter		Symbol	TMAN8N80	Unit
Drain-Source Voltage		V_{DS}	800	V
Gate-Source Voltage		V_{GS}	± 30	V
Continuous Drain Current	$T_C = 25\text{ }^{\circ}\text{C}$	I_D	8	A
	$T_C = 100\text{ }^{\circ}\text{C}$		4.9	A
Pulsed Drain Current (Note 1)		I_{DM}	32	A
Single Pulse Avalanche Energy (Note 2)		E_{AS}	201	mJ
Repetitive Avalanche Current (Note 1)		I_{AR}	8	A
Repetitive Avalanche Energy (Note 1)		E_{AR}	26.5	mJ
Power Dissipation	$T_C = 25\text{ }^{\circ}\text{C}$	P_D	265	W
	Derate above 25 $^{\circ}\text{C}$		2.12	W/ $^{\circ}\text{C}$
Peak Diode Recovery dv/dt (Note 3)		dv/dt	4.5	V/ns
Operating Junction and Storage Temperature Range		T_J, T_{STG}	-55~150	$^{\circ}\text{C}$
Maximum lead temperature for soldering purposes, 1/8" from case for 5 seconds		T_L	300	$^{\circ}\text{C}$

* Limited only by maximum junction temperature

Thermal Characteristics

Parameter	Symbol	TMAN8N80	Unit
Maximum Thermal resistance, Junction-to-Case	$R_{\theta JC}$	0.47	$^{\circ}\text{C}/\text{W}$
Maximum Thermal resistance, Junction-to-Ambient	$R_{\theta JA}$	62.5	$^{\circ}\text{C}/\text{W}$

Electrical Characteristics : $T_C=25^\circ\text{C}$, unless otherwise noted

Parameter	Symbol	Test condition	Min	Typ	Max	Units
OFF						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS} = 0\text{ V}, I_D = 250\text{ }\mu\text{A}$	800	--	--	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 800\text{ V}, V_{GS} = 0\text{ V}$	--	--	1	μA
		$V_{DS} = 640\text{ V}, T_C = 125^\circ\text{C}$	--	--	10	μA
Forward Gate-Source Leakage Current	I_{GSSF}	$V_{GS} = 30\text{ V}, V_{DS} = 0\text{ V}$	--	--	100	nA
Reverse Gate-Source Leakage Current	I_{GSSR}	$V_{GS} = -30\text{ V}, V_{DS} = 0\text{ V}$	--	--	-100	nA

ON

Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = 250\text{ }\mu\text{A}$	2	--	4	V
Drain-Source On-Resistance	$R_{DS(on)}$	$V_{GS} = 10\text{ V}, I_D = 4\text{ A}$	--	1.1	1.4	Ω
Forward Transconductance (Note 4)	g_{FS}	$V_{DS} = 30\text{ V}, I_D = 4\text{ A}$	--	7	--	S

DYNAMIC

Input Capacitance	C_{iss}	$V_{DS} = 25\text{ V}, V_{GS} = 0\text{ V},$ $f = 1.0\text{ MHz}$	--	1921	--	pF
Output Capacitance	C_{oss}		--	146	--	pF
Reverse Transfer Capacitance	C_{rss}		--	12	--	pF

SWITCHING







Turn-On Delay Time (Note 4,5)	$t_{d(on)}$	$V_{DD} = 400\text{ V}, I_D = 8\text{ A},$ $R_G = 25\text{ }\Omega$	--	31	--	ns
Turn-On Rise Time (Note 4,5)	t_r		--	30	--	ns
Turn-Off Delay Time (Note 4,5)	$t_{d(off)}$		--	172	--	ns
Turn-Off Fall Time (Note 4,5)	t_f		--	37	--	ns
Total Gate Charge (Note 4,5)	Q_g	$V_{DS} = 640\text{ V}, I_D = 8\text{ A},$ $V_{GS} = 10\text{ V}$	--	46	--	nC
Gate-Source Charge (Note 4,5)	Q_{gs}		--	7	--	nC
Gate-Drain Charge (Note 4,5)	Q_{gd}		--	15	--	nC







SOURCE DRAIN DIODE


Maximum Continuous Drain-Source Diode Forward Current	I_S	---	--	--	8	A
Maximum Pulsed Drain-Source Diode Forward Current	I_{SM}	---	--	--	32	A
Drain-Source Diode Forward Voltage	V_{SD}	$V_{GS} = 0\text{ V}, I_S = 8\text{ A}$	--	--	1.5	V
Reverse Recovery Time (Note 4)	t_{rr}	$V_{GS} = 0\text{ V}, I_S = 8\text{ A}$ $dI_F / dt = 100\text{ A}/\mu\text{s}$	--	479	--	ns
Reverse Recovery Charge (Note 4)	Q_{rr}		--	5.5	--	μC

Note :

1. Repeated rating : Pulse width limited by safe operating area
2. $L=5.9\text{mH}$, $I_{AS} = 8\text{A}$, $V_{DD} = 50\text{V}$, $R_G = 25\Omega$, Starting $T_J = 25^\circ\text{C}$
3. $I_{SD} \leq 8\text{A}$, $di/dt \leq 200\text{A}/\mu\text{s}$, $V_{DD} \leq BV_{DS}$, Starting $T_J = 25^\circ\text{C}$
4. Pulse Test :Pulse width $\leq 300\mu\text{s}$, Duty Cycle $\leq 2\%$
5. Essentially Independent of Operating Temperature Typical Characteristics

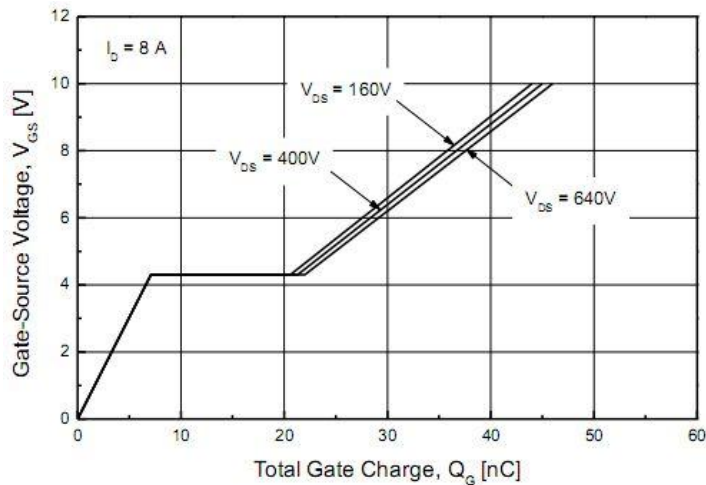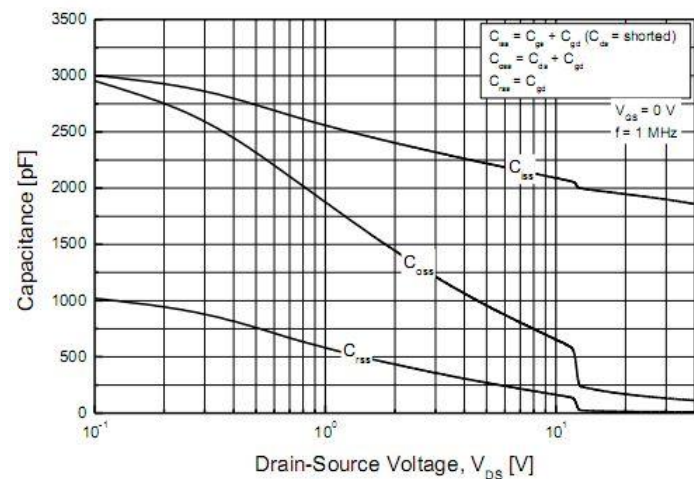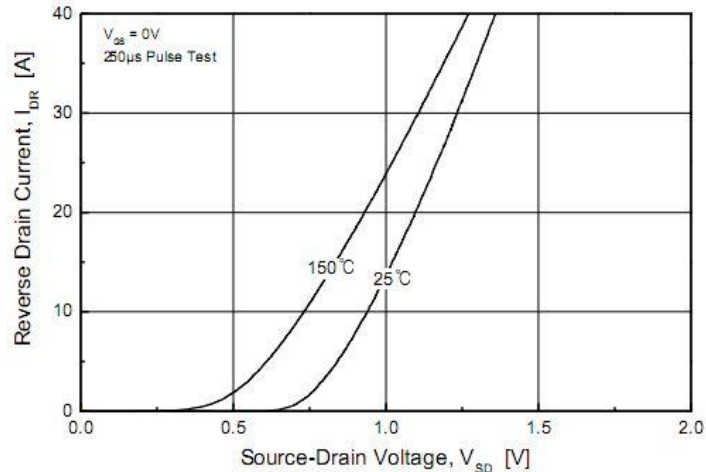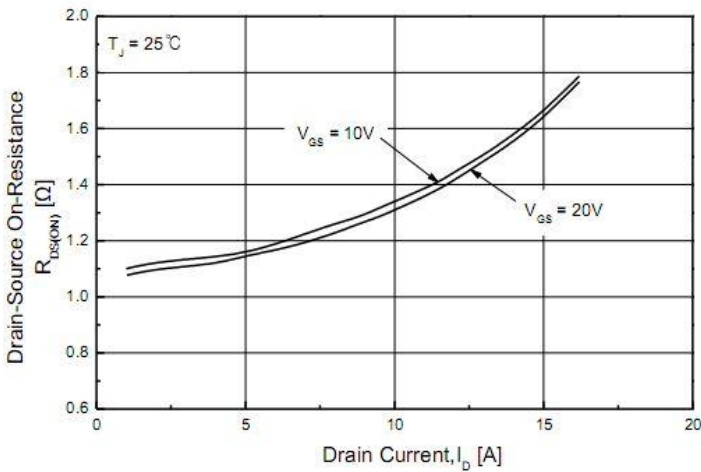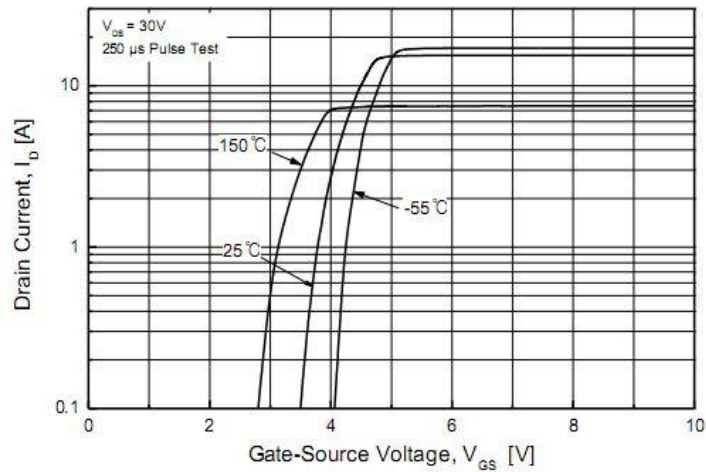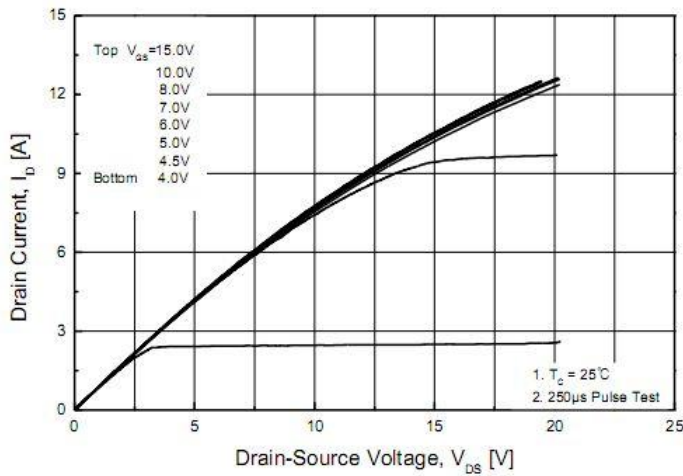

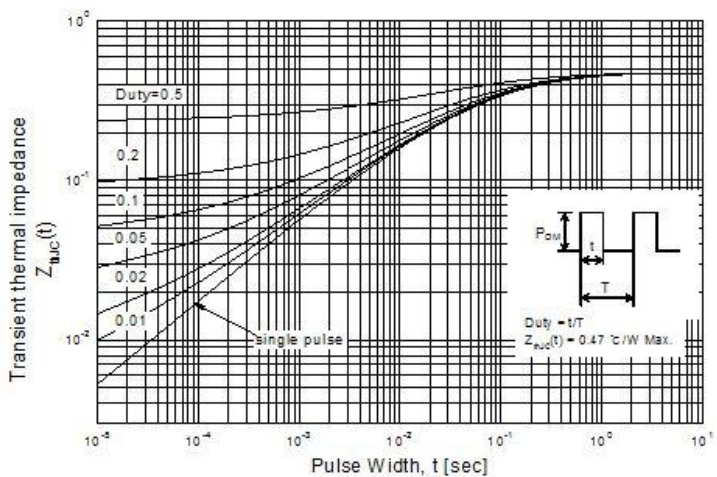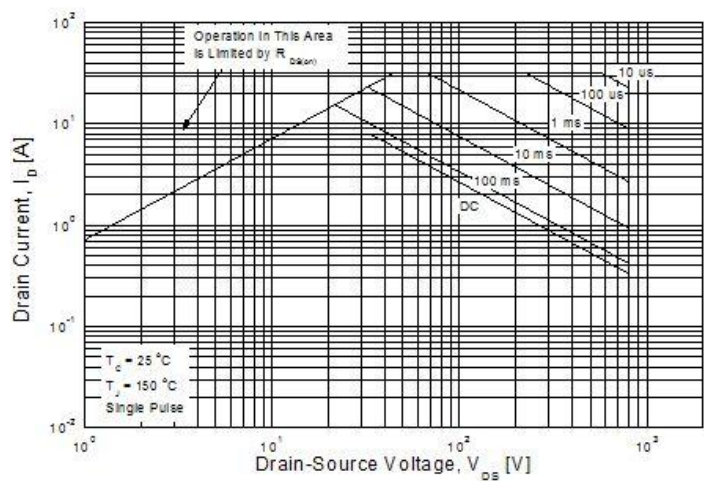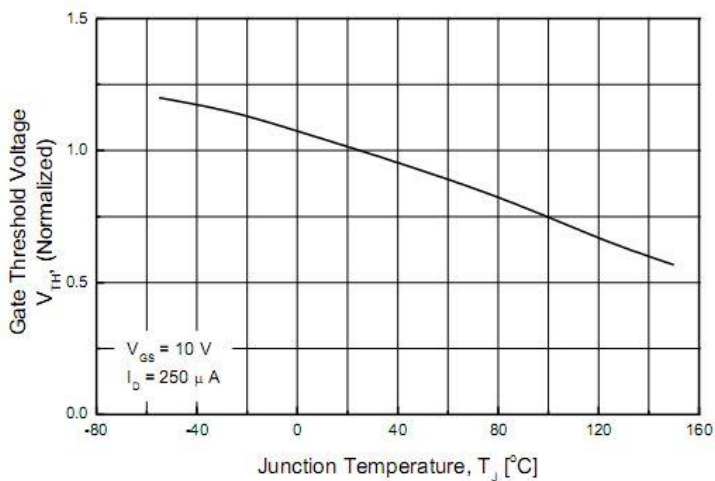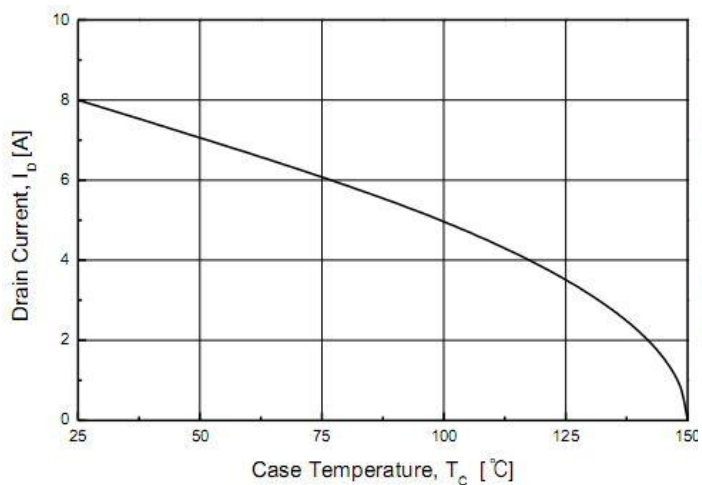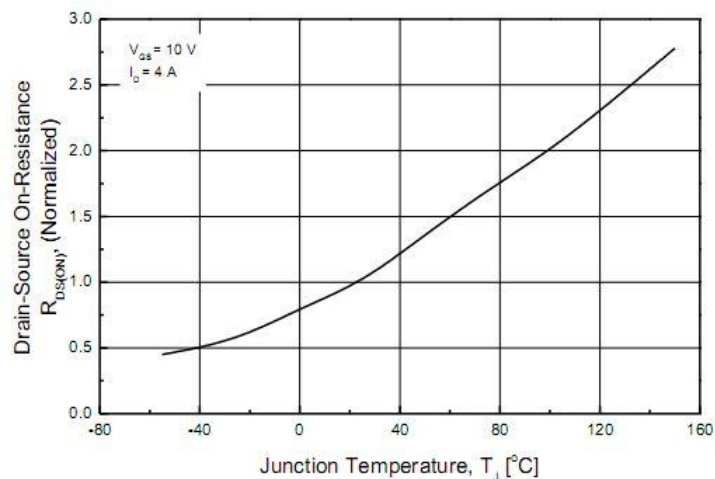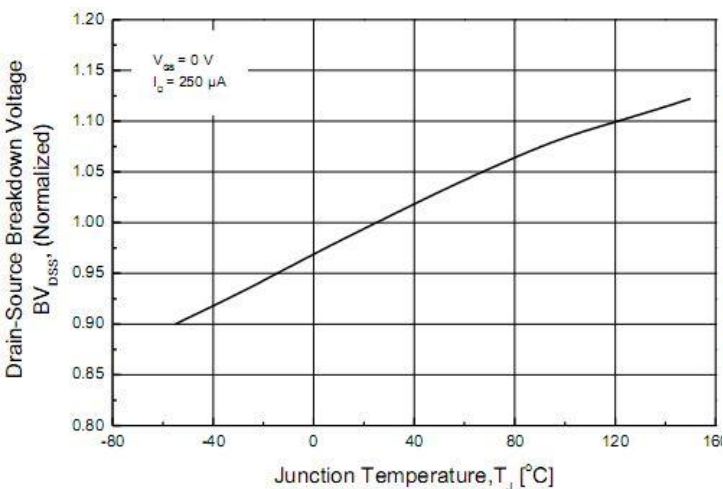

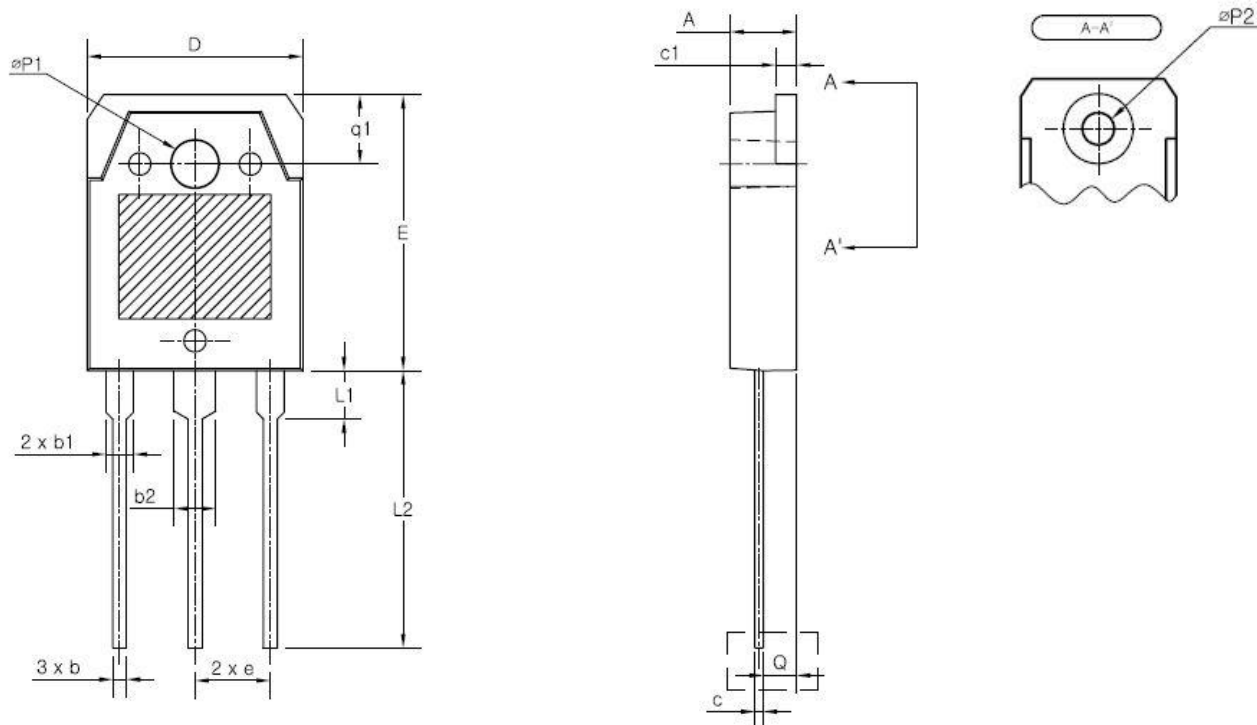TO-3PN MECHANICAL DATA


SYMBOL	MIN	NOM	MAX
A	4.60	4.80	5.00
b	0.80	1.00	1.20
b1	1.80	2.00	2.20
b2	2.80	3.00	3.20
c	0.55	0.60	0.75
c1	1.45	1.50	1.65
D	15.40	15.60	15.80
E	19.70	19.90	20.10
e	5.15	5.45	5.75
L1	3.30	3.50	3.70
L2	19.80	20.00	20.20
øP1	3.30	3.40	3.50
øP2	(3.20)		
Q	2.20	2.40	2.60
q1	4.80	5.00	5.20