

TRIAC(Through Hole / Isolated)

TMG16D80J

(Sensitive Gate)


SanRex Triac TMG16D80J is designed for full wave AC control applications. It can be used as an ON/OFF function or for phase control operation.

Typical Applications

- Home Appliances : Washing Machines, Vacuum Cleaners, Rice Cookers, Micro Wave Ovens, Hair Dryers, other control applications
- Industrial Use : SMPS, Copier Machines, Motor Controls, Dimmer, SSR, Heater Controls, Vending Machines, other control applications

Features

- $I_T(RMS)=16A$
- High Surge Current
- Low Voltage Drop
- Lead-Free Package

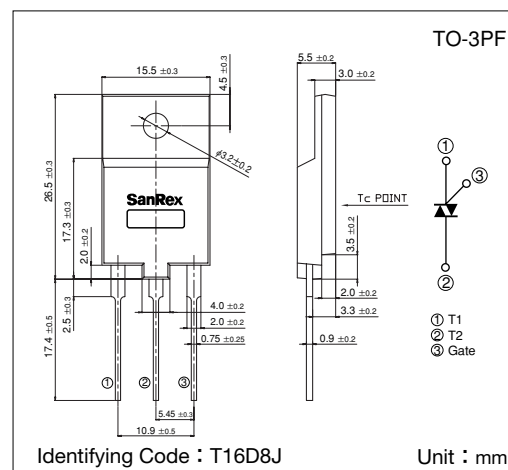

Maximum Ratings


($T_J=25^{\circ}C$ unless otherwise specified)

Symbol	Item	Reference	Ratings	Unit
V_{DRM}	Repetitive Peak Off-State Voltage		800	V
$I_T(RMS)$	R.M.S. On-State Current	$T_C=91^{\circ}C$	16	A
I_{TSM}	Surge On-State Current	One cycle, 50Hz/60Hz, Peak value non-repetitive	155/170	A
I^2t	I^2t (for fusing)		120	A^2S
PGM	Peak Gate Power Dissipation		5	W
$P_{G(AV)}$	Average Gate Power Dissipation		0.5	W
I_{GM}	Peak Gate Current		2	A
V_{GM}	Peak Gate Voltage		10	V
V_{ISO}	Isolation Breakdown Voltage (R.M.S.)	A.C. 1minute	1500	V
T_J	Operating Junction Temperature		$-40 \sim +125$	$^{\circ}C$
T_{stg}	Storage Temperature		$-40 \sim +150$	$^{\circ}C$
	Mass		5.6	g


Electrical Characteristics

Symbol	Item	Reference	Ratings			Unit	
			Min.	Typ.	Max.		
I_{DRM}	Repetitive Peak Off-State Current	$V_D=V_{DRM}$, Single phase, half wave, $T_J=125^{\circ}C$			2	mA	
V_{TM}	Peak On-State Voltage	$I_T=25A$, Inst. measurement			1.4	V	
I_{GT1}^{+}	1 2 3 4 Gate Trigger Current	$V_D=6V$, $R_L=10\Omega$			10	mA	
I_{GT1}^{-}					10		
I_{GT3}^{+}					—		
I_{GT3}^{-}					10		
V_{GT1}^{+}	1 2 3 4 Gate Trigger Voltage				1.5	V	
V_{GT1}^{-}					1.5		
V_{GT3}^{+}					—		
V_{GT3}^{-}					1.5		
V_{GD}	Non-Trigger Gate Voltage		$T_J=125^{\circ}C$, $V_D=\frac{1}{2}V_{DRM}$	0.2			V
$(dv/dt)_c$	Critical Rate of Rise of Off-State Voltage at Commutation		$T_J=125^{\circ}C$, $(di/dt)_c=-8A/ms$, $V_D=400V$	10			$V/\mu s$
I_H	Holding Current				25		mA
R_{th}	Thermal Resistance		Junction to case			1.8	$^{\circ}C/W$


Trigger mode of the triac

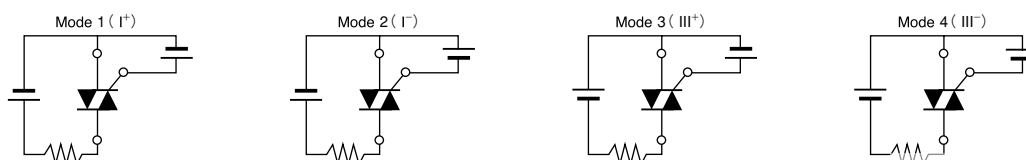


Gate Characteristics

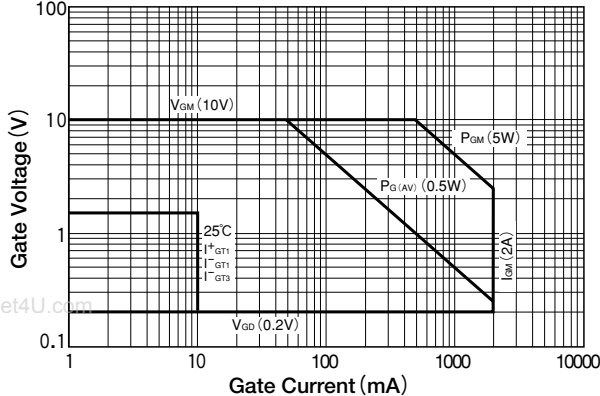


On-State Characteristics (MAX)

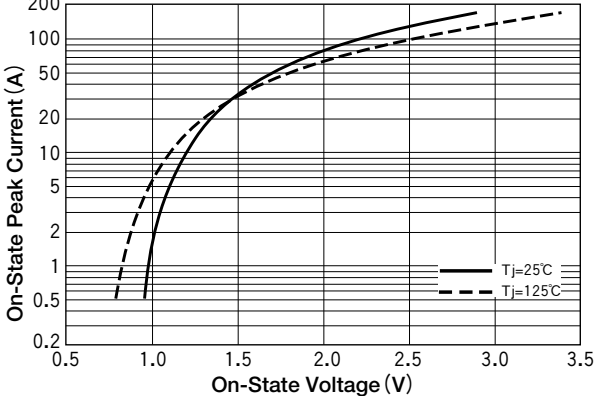


RMS On-State vs Maximum Power Dissipation

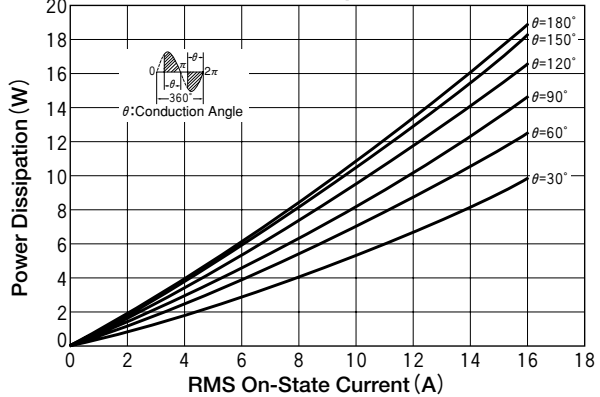


RMS On-State vs Allowable Case Temperature

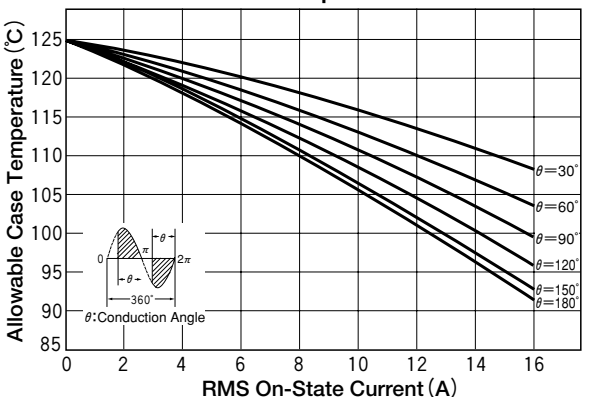


Surge On-State Current Rating (Non-Repetitive)

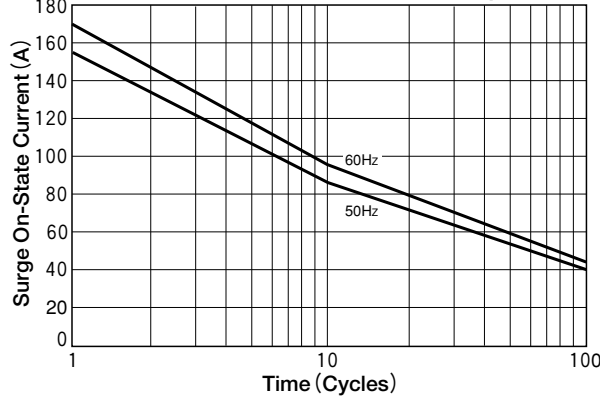

Transient Thermal Impedance

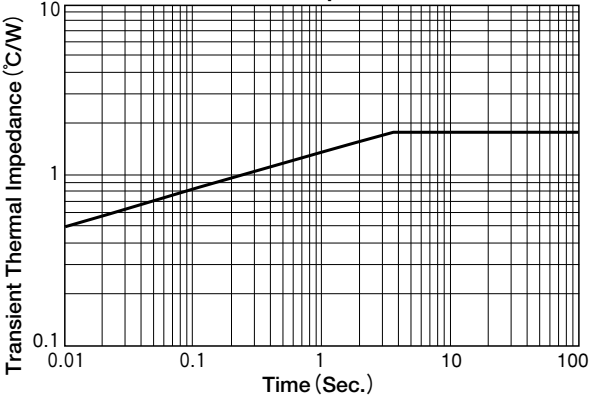

$I_{GT} - T_j$ (Typical)

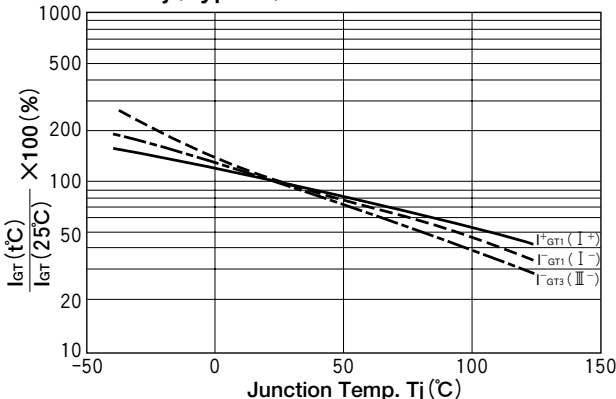

$V_{GT} - T_j$ (Typical)

