
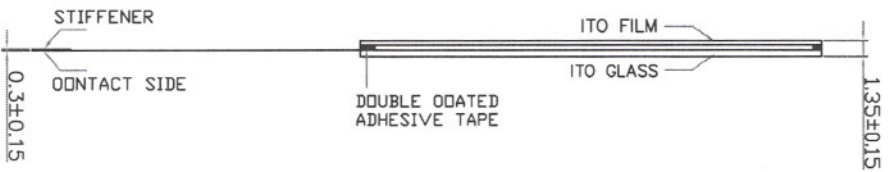



PRELIMINARY

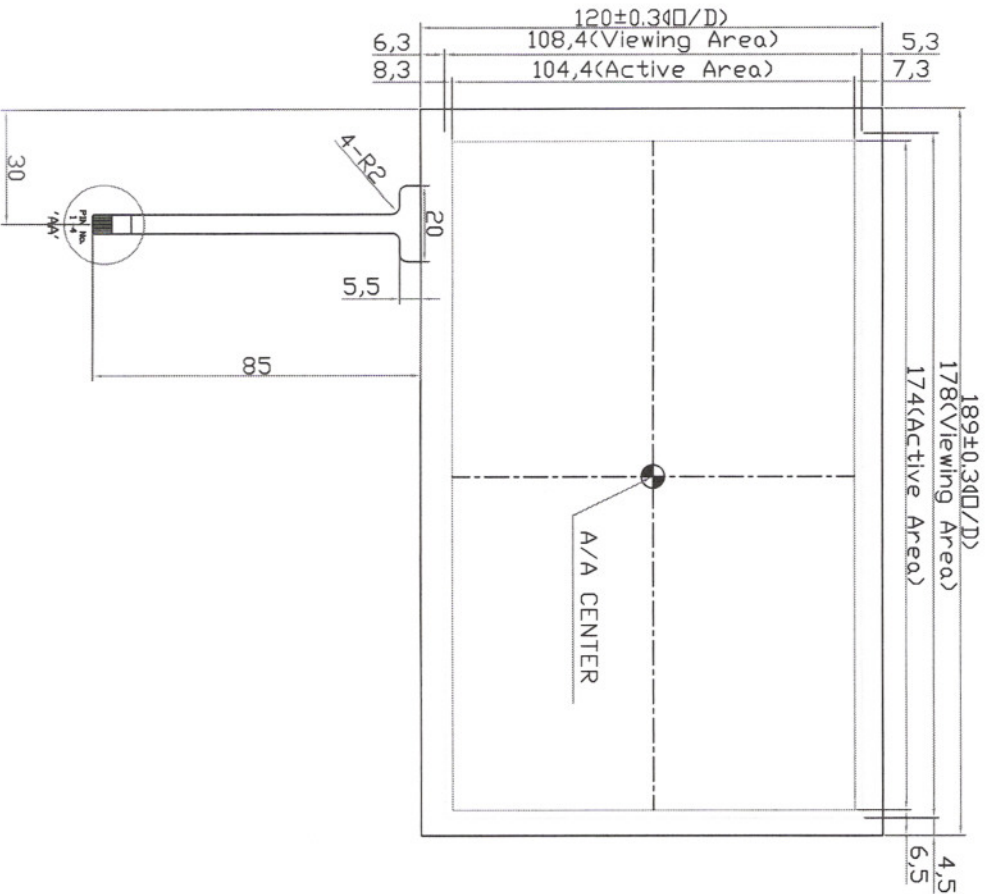

REMARK

- 1.Glass Thk: 1.1mm
- 2.Film Type: Non-Glare
- 3.Total Thk: 1.35±0.15mm
- 4.Linearity: ±1.5 or less
- 5.Transmittance: 80% or more
- 6.Resistance
- 100<Glass(Y)<1200 ohm
- 100<Film(X)<1200 ohm
- 7.Connector: FPC
- 8.General Tolerance: ±0.3


CIRCUIT DIAGRAM

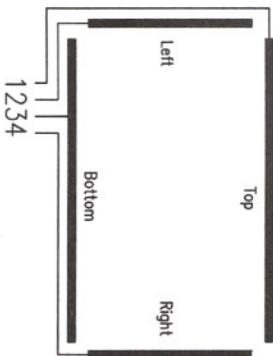

SIGNAL ASSIGNMENT

Pin No	Signal
1	Top
2	Left
3	Bottom
4	Right

Detail "AA"

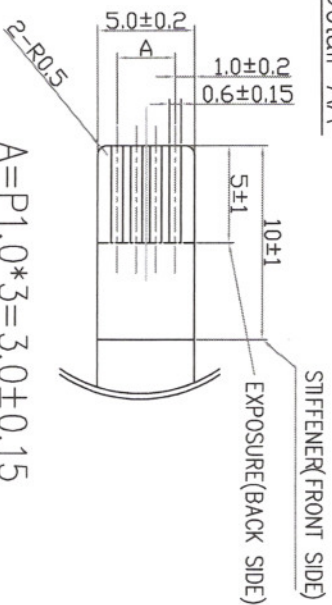

NOTE: The HantouchUSA Incoming Inspection Standard is part of this drawing.
This quality and performance document can be viewed at
www.hantouchUSA.com, under Incoming Inspection Standards.

REV.	DATE	DRAWN	CHECKED	APPROVED
0	06.01.07	H.V.I.M		
NEW DRAW				
REVISED				

APPROVE	STD.TOL	UNIT	mm	DRAWING NO.	REV.
CHECK	±0.3	SCALE	NONE		
DESIGN					
DRAW					
				DESCRIPTION	SHEET
				8.0" TOUCH PANEL	1/1