


Linear Array Module TPLM 086 L5.5

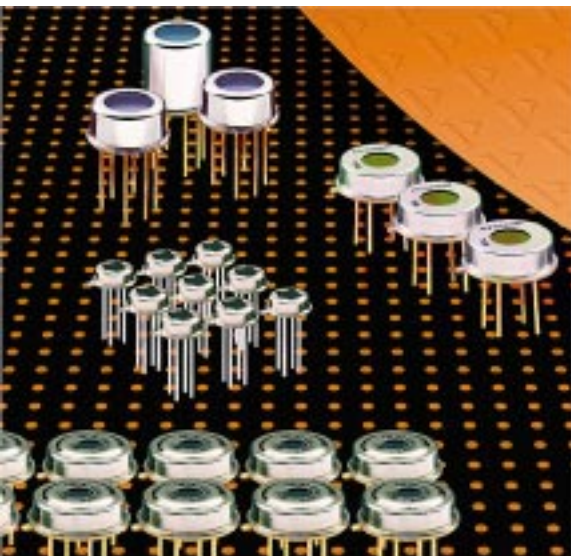



Thermopile Linear Array with 8 Elements

Integrated Optics, Multiplexer, Amplifier and Reference



Plug-In Module with Stored Calibration Data

Designed for Industrial Temperature Measurements

The integrated **ThermoPile** Linear Array Sensor consists of a 8-elements thermopile chip connected to a multiplexing signal conditioning circuit. The sensor is further equipped with an internal temperature sensor for correct target temperature determination. All analogue signals, including the ambient temperature, are given out in a fixed frame, containing the information in one serial stream. Lenses for different field of views are available on demand. The sensor in a TO-5 housing is mounted on a small pcb with calibration data for this specific sensor stored in an E²PROM.

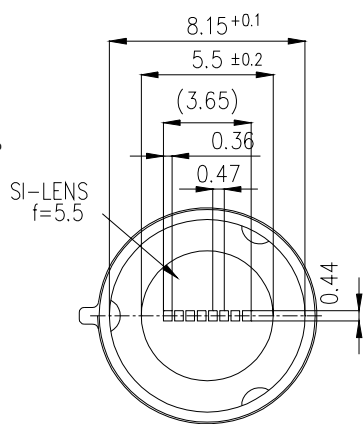

Parameters	TPLM 086L 5.5	typical	units	condition
Field of View		41	°	f/1, f = 5.5mm
Output Voltage		0.95	V	T _{BB} =80°, T _{amb} =20°
Output Noise		0.4	mV/√Hz	0.5..20Hz
Object Temp.	-20	100	°C	
Operating Voltage V_{DD}		5	V	
Operating Current		1	mA	
Zero Signal Offset V_{ref}		V _{DD} /2	V	
Output Resistance		200	Ω	
Power up Time		0.3	s	
Sample Frequency		3	kHz	
Storage Temperature	-40	100	°C	non permanent
Operating Temperature	-20	100	°C	
Temperature Ref Slope S_T		10	mV/K	V _{Temp} = S _T T _{amb} / K + V ₀
Temperature Ref Offset V₀		0	mV	

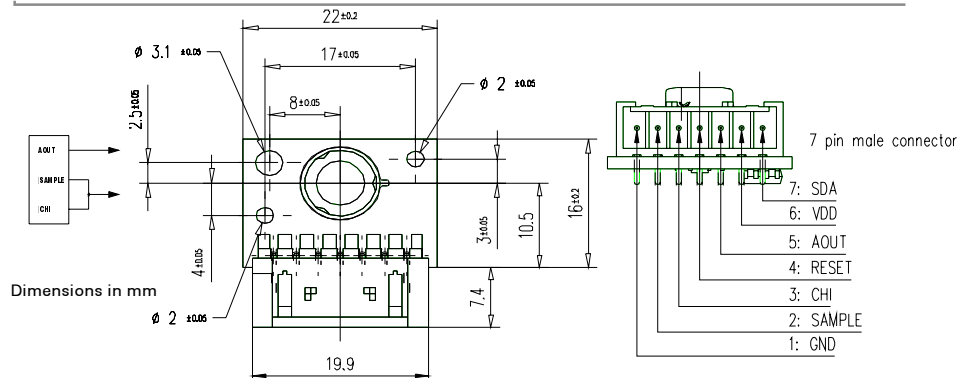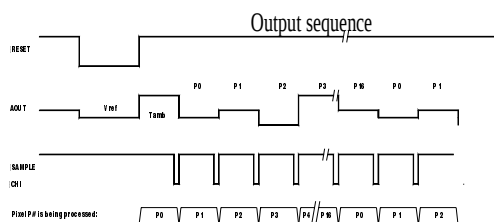

Europe:
PerkinElmer Optoelectronics GmbH
 Wenzel Jaksch Str 31
 Wiesbaden / Germany
 Phone +49(0)611 492 0
 Fax +49(0)611 492 170

USA:
PerkinElmer Optoelectronics
 2175 Mission College Blvd
 Santa Clara, CA 95054
 Phone +408 565 0830
 Fax +408 565 0703

Asia:
PerkinElmer Optoelectronics
 47, Ayer Rajah Crescent #06-12
 Singapore 139947
 Phone +65 775 2022
 Fax +65 775 1008