

# Topstek Current Transducer TQHV5A .. TQHV50A


## TQHV5A~50A

### Features

- ◆ Highly reliable Closed Loop Hall Effect device
- ◆ Open Loop CT voltage output format: 4V at nominal input
- ◆ Compact and light weight
- ◆ Fast response time
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Excellent frequency response (> 150 kHz)
- ◆ Low power consumption at quiescent state (10 mA nominal)
- ◆ Capable of measuring both DC and AC, both pulsed and mixed
- ◆ High isolation voltage between the measuring circuit and the current-carrying conductor (AC2.5KV)
- ◆ Extended operating temperature range
- ◆ Flame-Retardant plastic case and silicone encapsulant, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

### Applications

- ◆ UPS systems
- ◆ Industrial robots
- ◆ NC tooling machines
- ◆ Elevator controllers
- ◆ Process control devices
- ◆ AC and DC servo systems
- ◆ Motor speed controller
- ◆ Electrical vehicle controllers
- ◆ Inverter-controlled welding machines
- ◆ General and special purpose inverters
- ◆ Power supply for laser processing machines
- ◆ Controller for traction equipment eg. electric trains
- ◆ Other automatic control systems

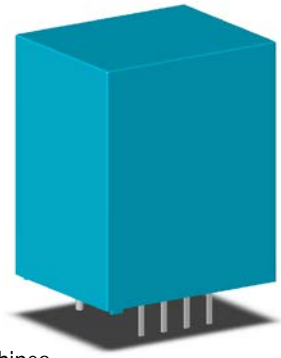




### Specifications

Parameter	Symbol	Unit	TQHV5A	TQHV7.5A	TQHV10A	TQHV15A	TQHV25A	TQHV37.5A	TQHV50A
Nominal Input Current	$I_{fn}$	A DC	±5	±7.5	±10	±15	±25	±37.5	±50
Linear Range	$I_{fs}$	A DC	±15	±22.5	±30	±45	±75	±113	±140
Coil Turn Ratio	$I_s$	A	6:1000	4:1000	3:1000	2:1000	1:1000	1:1100	1:1500
Consumption Current@ $I_f=I_{fn}$	$I_{CC}$	mA	45	45	45	45	40	47	47
Nominal Output Voltage	$V_{hn}$	V	±4 V±1% at $I_f=I_{fn}$ ( $R_L=10k\Omega$ )						
Supply Voltage Range	$V_{CC}/V_{EE}$	V	±15V ±5%						
Offset Voltage	$V_{os}$	mV	Within ±40 mV @ $I_f=0$ , $T_a=25^\circ\text{C}$						
Output Resistance	$R_{OUT}$	$\Omega$	<100 $\Omega$ (50 $\Omega$ nominal)						
Hysteresis Error	$V_{oh}$	mV	Within ±35 mV @ $I_f=I_{fn}\rightarrow 0$						
Linearity	$\rho$	%	Within ±0.2% of $I_{fn}$						
Response Time (90% $V_{hn}$ )	$T_r$	$\mu\text{sec}$	3 $\mu\text{sec}$ max. @ $dI_f/dt = I_{pn}/\mu\text{sec}$						
Frequency Bandwidth (-3dB)	$f_{BW}$	Hz	DC to 150kHz						
Thermal Drift of Output	-	%/°C	Within ±0.02 %/°C @ $I_{fn}$						
Thermal Drift of Zero Current Offset	-	mV/°C	Within ±1.5 mV/°C @ $I_{fn}$						
Dielectric Strength	-	V	AC2.5KV X 60 sec						
Isolation Resistance @ 1000 VDC	$R_{IS}$	M $\Omega$	>1000 M $\Omega$						
Operating Temperature	$T_a$	°C	-40°C to 80°C						
Storage Temperature	$T_s$	°C	-40°C to 85°C						
Mass	W	g	<14 g						

# Topstek Current Transducer TQHV5A .. TQHV50A

## Appearance, dimensions and pin identification

All dimensions in mm  $\pm 0.5$ , holes  $-0$ ,  $+0.2$  except otherwise noted.

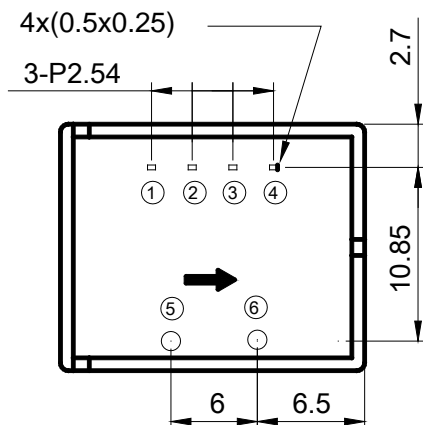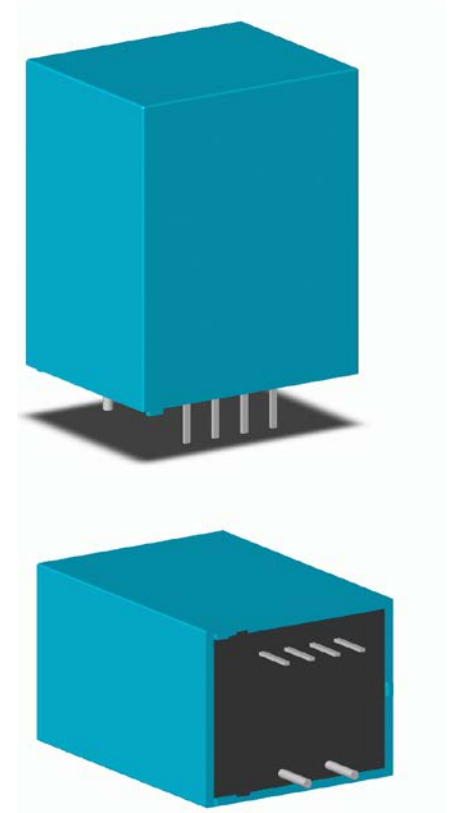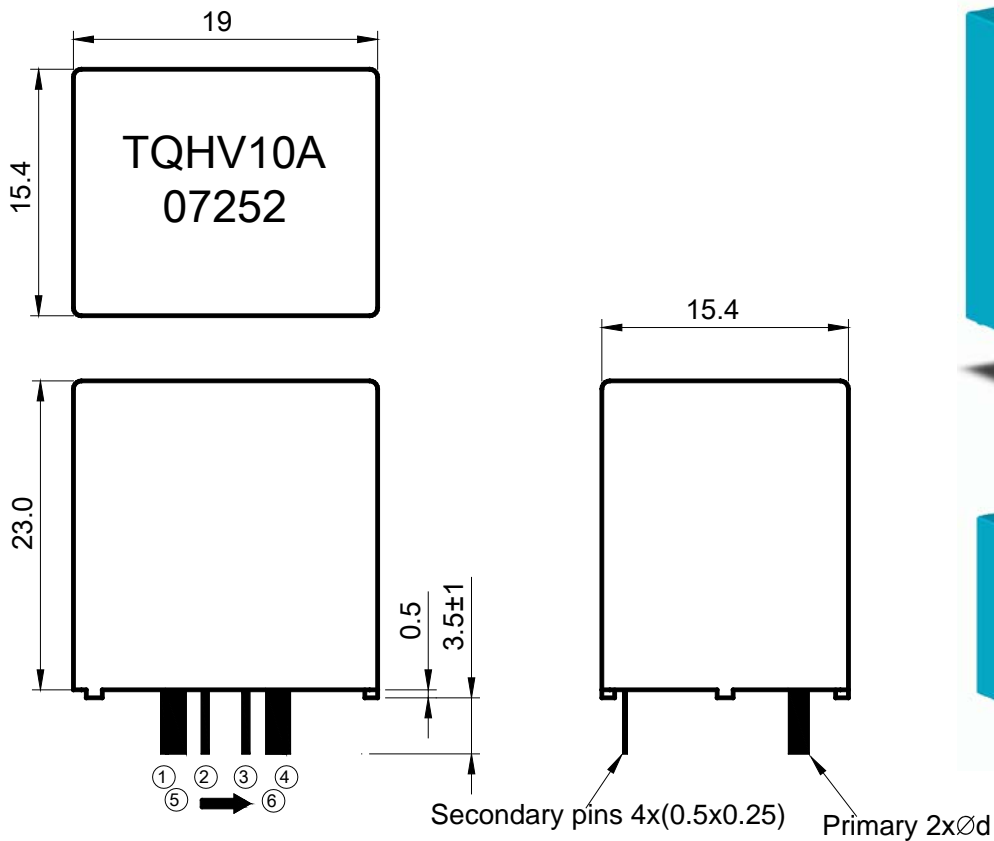

Pin Assignment	
①	-15V
②	0V
③	+15V
④	V <sub>OUT</sub>
⑤	I +
⑥	I -

Bottom View

Nominal Primary Current	3--4A	5--7A	7.5--12A	12.5--25A	30--37.5A	40--50A
d (mm)	0.6	0.8	1.0	1.3	1.4	1.6