

TR1504

SMD Ferrite Transponder Inductor

15.7x5.2x2.2 mm
(7.20 mH – 0.29 mH)

www.DataSheet4U.com

Features


The TR1504 series is the large core volume alternative for Surface mountable low profile, ferrite wound transponder inductor.

Although the height remains the same as the TR1102 series, the larger core cross sectional area and length, allow a better reading distance and sensibility. It is recommended when the IC power consumption is high as well.

Main characteristics are:

- High sensitivity levels.
- Low profile.
- Winding coated to avoid handling problems.

Dimensions

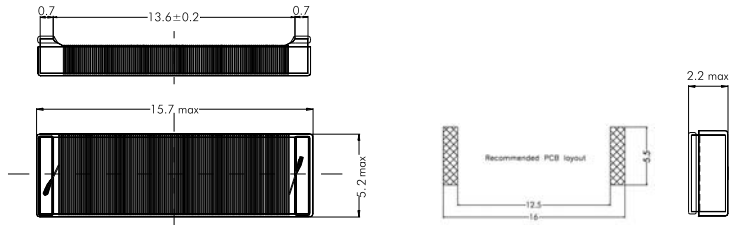

Electrical specifications

P/N	L (mH) @125 kHz	Tolerance	C _{res} (pF)	Q @125 kHz	SRF (kHz)	Sensitivity (mV _{pp} /A _{pp} /m) @125 kHz
TR1504-0720J	7.20	±5%	225	>20	>220	>145
TR1504-0600J	6.00	±5%	270	>20	>300	>120
TR1504-0491J	4.91	±5%	330	>22	>330	>105
TR1504-0415J	4.15	±5%	400	>30	>350	>100
TR1504-0344J	3.44	±5%	470	>40	>450	>90
TR1504-0289J	2.89	±5%	560	>35	>450	>80
TR1504-0238J	2.38	±5%	680	>36	>350	>75
TR1504-0197J	1.97	±5%	820	>30	>600	>65
TR1504-0162J	1.62	±5%	1000	>33	>900	>60
TR1504-0108J	1.08	±5%	1500	>20	>1000	>45
TR1504-0090J	0.90	±5%	1800	>20	>1000	>40
TR1504-0073J	0.73	±5%	2200	>20	>2000	>35
TR1504-0060J	0.60	±5%	2700	>35	>2000	>33
TR1504-0049J	0.49	±5%	3300	>30	>2500	>30
TR1504-0034J	0.34	±5%	4700	>25	>3000	>26
TR1504-0029J	0.29	±5%	5600	>24	>3000	>24

Replace + with the tolerance code letter.

Operating and test freq: 125KHz.

SRF: Self-resonant frequency of the coil.

C: Capacitor for tuning circuits (125kHz).

This chart is a reference guide for the most common required values at working frequency of 125 kHz. Any other inductance value at LF or tighter tolerances can be provided. Please contact our sales department for any inquiry.

Sensitivity measured with Helmholtz coils H=8.36 A_{pp}/m @125 kHz. Contact us for measurement specification.

- Terminals: Ag-Ni-Sn100.
- Wire: H, 180°C, Solderable.
- Max. Operating Temperature 130°C.
- Refer to the General Features of SMD transponder inductors page.