



TRA2

SPECIFICATION

FILE NUMBER: P-08KC201A

DATE: 2001/11/02



■ Features

16 switching capability

SPST-NO & SPDP configuration

5kv dielectric between coil and contacts

■ CONTACT DATA

Contact Form	1A/1C	
Contact Material	AgCdO	AgSnO
Contact Ratings	16A 240VAC	16A 30VDC
Max Switching Voltage	250VAC/30VDC	
Max Switching Current	20A	
Max Switching Power	4800VA/480W	
Contact Resistance	100m Ω Max	at 6VDC 1A
Life Expectancy Electrical	100,000	Operations(at30Operations/minute)
Machanical	10,000,000	Operations

■ GENERAL DATA

Insulation Resistance		100M Ω Min at 500VDC
Dielectric Strength Between Open Contacts		1000VAC(for one minute)
Between Contacts and coil		5000VAC(for one minute)
Operate Time		20ms
Release Time		10ms
Temperature Range		-40°C to+70°C
Shock Resistance	Operating Extremes	10G
	Damage Limits	100G
Vibration Resistance		10-55Hz,1.5mm
Humidity		40-85%
Weight		Approx 14g
Safety Standard		UL:E173485




■ COIL DATA


Nominal Voltage (VDC)	Coil Resistance at 20±10%(Ω)		Max Operate Voltage VDC	Min Release Voltage VDC	Max Applicable Voltage VDC
	0.54W	0.72W			
3	17	13	2.4	0.15	3.9
5	46	35	4	0.25	6.5
6	67	50	4.8	0.3	7.8
9	150	110	7.2	0.45	11.7
12	270	200	9.6	0.6	15.6
24	1050	800	19.2	1.2	31.2
48	4250±15%	3200	38.4	2.4	62.4

■ ORDERING CODE




TRA2 D--12VDC--S--Z

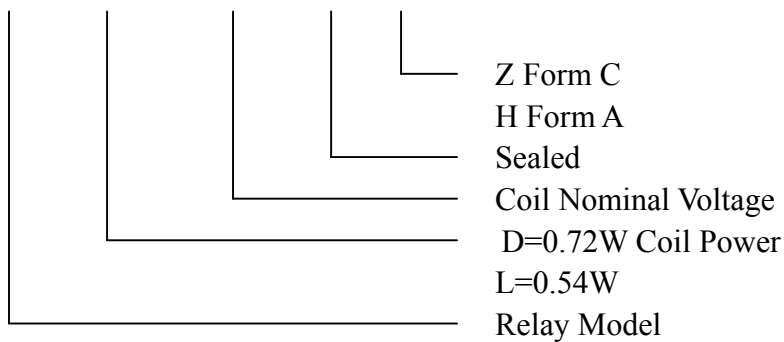


OVERALL AND MOUNTING DIMENSIONS

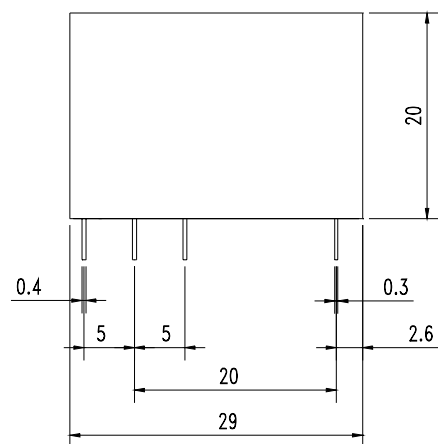

Dimensions

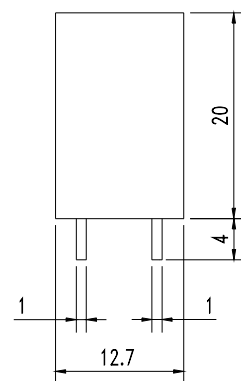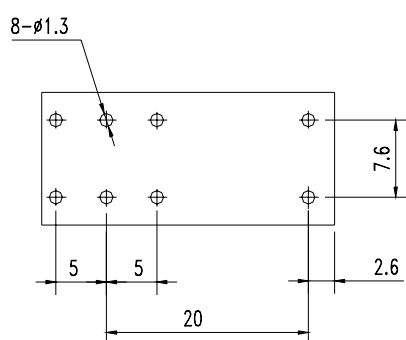
Terminal Arrangement/
Internal Connections
(Bottom view)


Form C



Form A