


# Topstek AC Current Sensor TU10P-90A

## TU10P-90A

### Features and Applications

- ◆ Accurate AC current monitoring/measuring device
- ◆ Fast clamp-on application on existing switchboard wire
- ◆ Excellent linearity of the output voltage over a wide input range
- ◆ Ferrite core ensuring fast response time and low phase lag
- ◆ Excellent frequency response (50 ~ 150 kHz) for accurate RMS measurement without DC component
- ◆ Wide measurement range (10mA ~ 90Amp AC)
- ◆ Good linearity for low current (10mA ~ 1A) detection
- ◆ Secondary coil equipped with two 7.5V surge suppression diodes for equipment protection and provide linear output up to 15.6Vp-p or 5.5VRMS
- ◆ High voltage isolation between measuring circuit and current-carrying conductor (1000V 60Hz AC)
- ◆ Extended operating temperature range -20°C to 50°C
- ◆ Flame-Retardant plastic case using UL classified materials
- ◆ All materials used are RoHS compliant
- ◆ AC Current Sensor/Current Transducer applications like power meter current detectors or equipment over current protection circuits

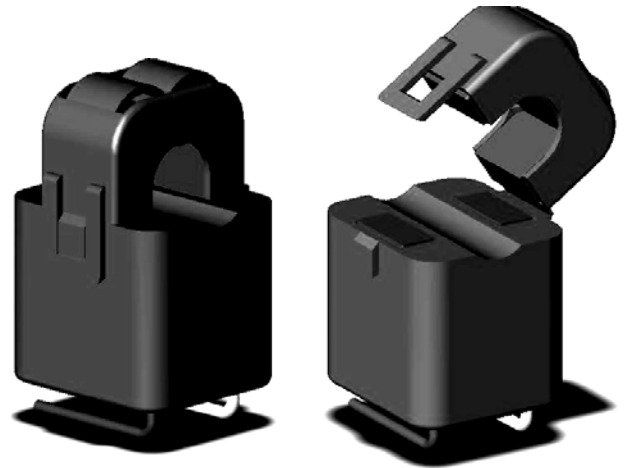


### Specifications


Parameter	TU10P-90A
Rated Input Current Range	10mARMS~90ARMS (50Hz/60Hz)
Max Continuous Current	120ARMS
Linear Output Range	15.6V <sub>p-p</sub> or 5.5V <sub>RMS</sub>
Working Frequency Range	50Hz~150kHz
No. of Secondary Turns	3000±2
Secondary Coil Resistance	460±30Ω
Secondary Surge Voltage Clamping	2(two) 7.5V diodes
Dielectric Strength	AC 1KV 60sec
Isolation Resistance	>100MΩ @ 500VDC
Operating Temperature	-20°C to 50°C
Storage Temperature	-30°C to 90°C
Case Material	UL94V0 Plastic
Terminals (Standard)	UL 1007 AWG22, Length:150±10mm
Terminals (Option Y)	UL 1007 AWG18 Wire, Length:3000±50mm Two Y4.3 Terminals with PVC Tube
Mating Output Connector	JST SMP-02V-BC
Approximate Weight	48g

### Dimensions and pin identification


All dimensions in mm ±0.5, holes -0, +0.2 except otherwise noted.

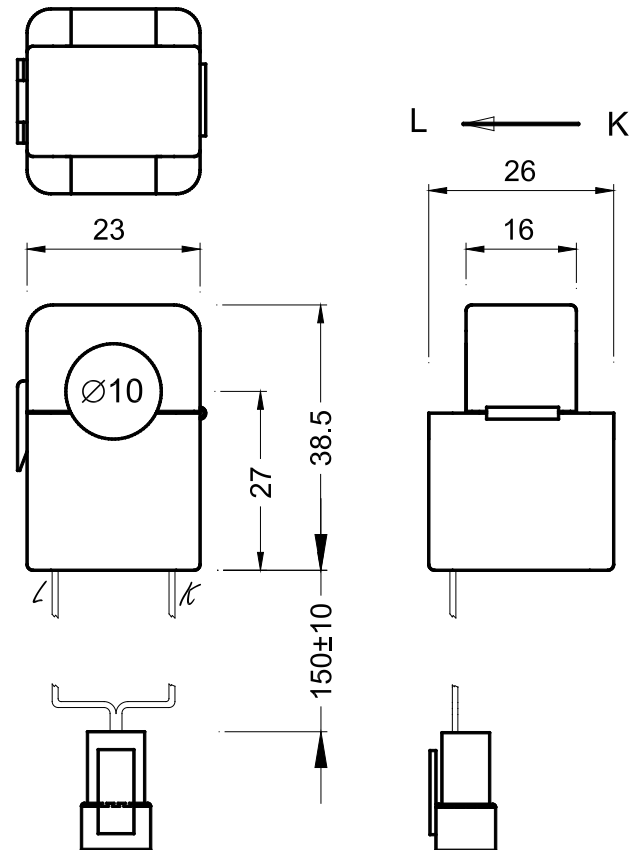

Standard Terminal

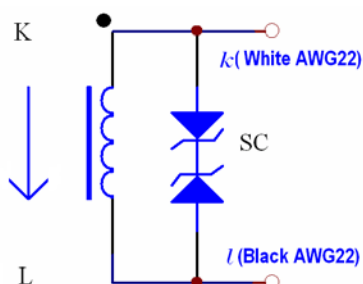

Equivalent Circuit Diagram

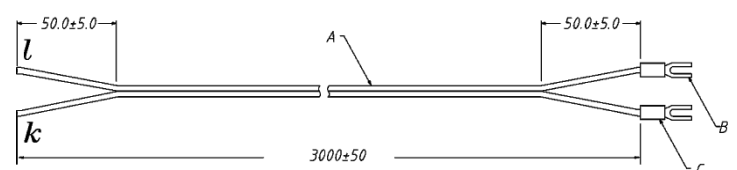

Option Y Terminal