

8A Bridge Rectifiers

Features

- Low forward voltage drop
- High current capability, high reliability
- High forward surge current capability
- Ideal for printed circuit board
- High temperature soldering guaranteed:
260° C/10 seconds, 1.375" (9.5mm) lead length at 5 lbs.(2.3kg) tension
- This series is UL recognized under component index, File number E194718
- RoHS compliant



TU



Mechanical Data

Case:	Molded plastic
Terminals:	Plated leads solderable per MIL-STD-202E, Method 208C
Polarity:	As marked on body
Mounting Torque:	8.8 in. – lbs. max.
Weight:	0.3 ounces, 8.0 grams

Maximum Ratings And Electrical Characteristics ($T_{amb}=25^{\circ}\text{C}$)

Symbols	Parameter	TU 800	TU 801	TU 802	TU 804	TU 806	TU 808	TU 810	Unit	Conditions
V_{RRM}	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
V_{RMS}	Maximum RMS Voltage	35	70	140	280	420	560	700	V	
V_{DC}	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
I_{F(AV)}	Maximum Average Forward Rectified Current (Note 1)	8.0							A	$T_C=100^{\circ}\text{C}$
I_{FSM}	Peak Forward Surge Current	300							A	8.3ms single half sine-wave superimposed on rated load (JEDEC Method)
V_F	Maximum Instantaneous Forward Voltage Drop per leg	1.0							V	$I_F=8.0\text{A}$
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage per leg	5.0							μA	$T_A=25^{\circ}\text{C}$
		1.0							mA	$T_A=100^{\circ}\text{C}$

Symbols	Parameter	TU 800	TU 801	TU 802	TU 804	TU 806	TU 808	TU 810	Unit	Conditions
I^2_t	Rating for Fusing (1ms<t<8.3ms)	373							A ² S	
C _J	Typical Junction Capacitance	200							pF	V _R =4V, f=1MHz
R _{θJA}	Typical Thermal Resistance per leg	18							°C/W	(Note 2)
R _{θJC}	Typical Thermal Resistance per leg	5.0							°C/W	(Note 1)
T _J , T _{STG}	Operating and Storage Temperature Range	-55 to 150							°C	

Note:

- Unit mounted on 3.0" x 3.0" x 0.11" thick (7.5 x 7.5 x 0.3cm) Al. plate.
- Unit mounted in free air, no heatsink, P.C.B at 0.375" (9.5mm) lead length with 0.5" x 0.5" (12 x 12mm) copper pads
- Single Phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%

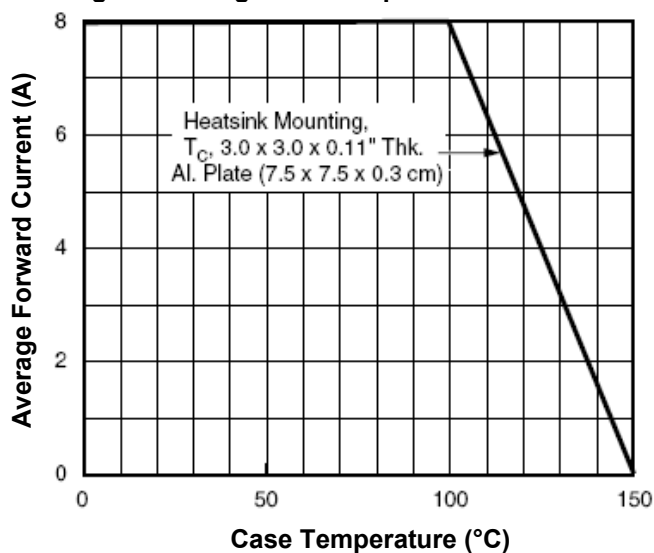
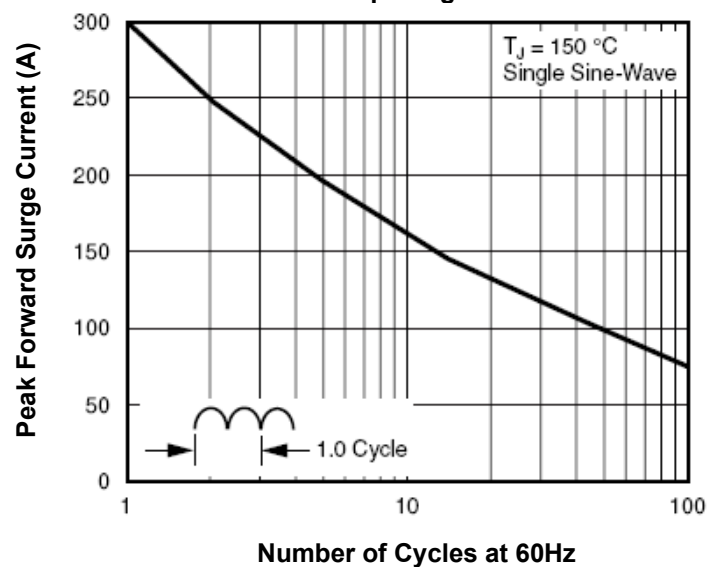
Rating and characteristic curves**Fig.1- Derating Curve Output Rectified Current****Fig.2-Max Non-Repetitive Peak Forward Surge Current per leg**

Fig.3- Typical Instantaneous Forward Characteristics, per leg

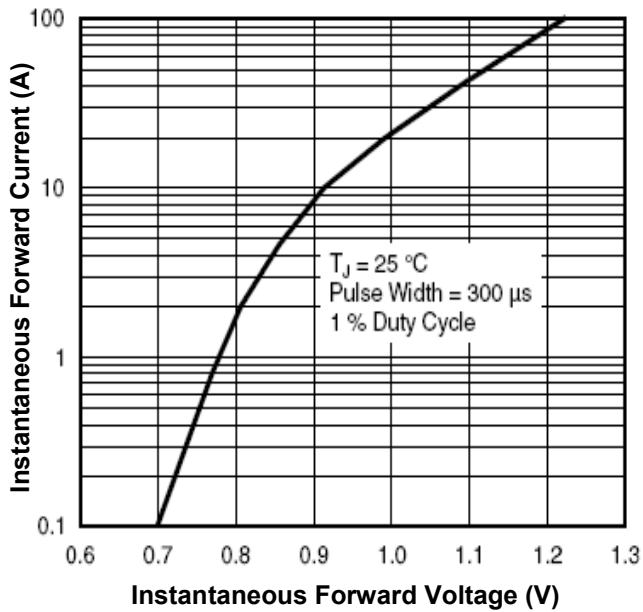


Fig.4-Typical Reverse Leakage Characteristics per leg



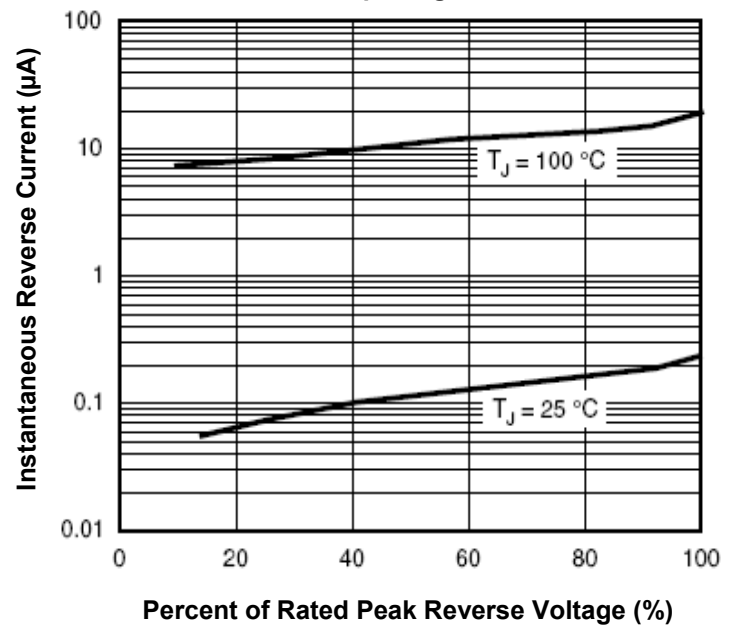


Fig.5-Typical Junction Capacitance per leg

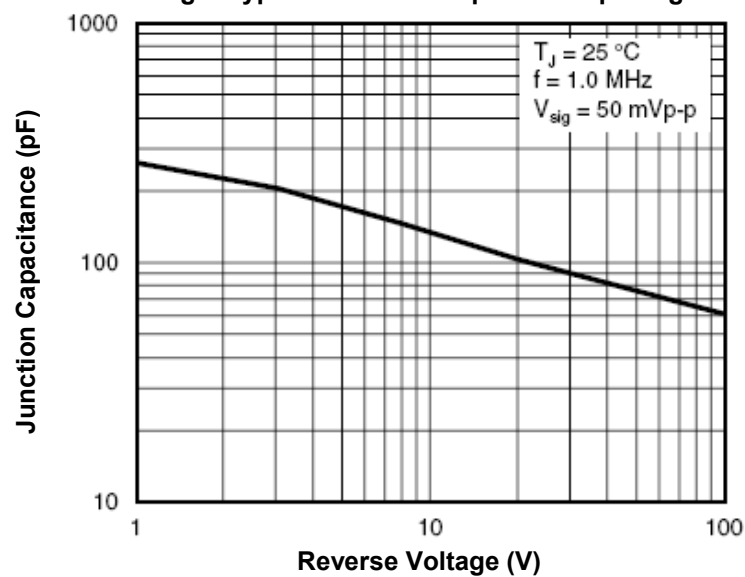

Dimensions in inch (mm)

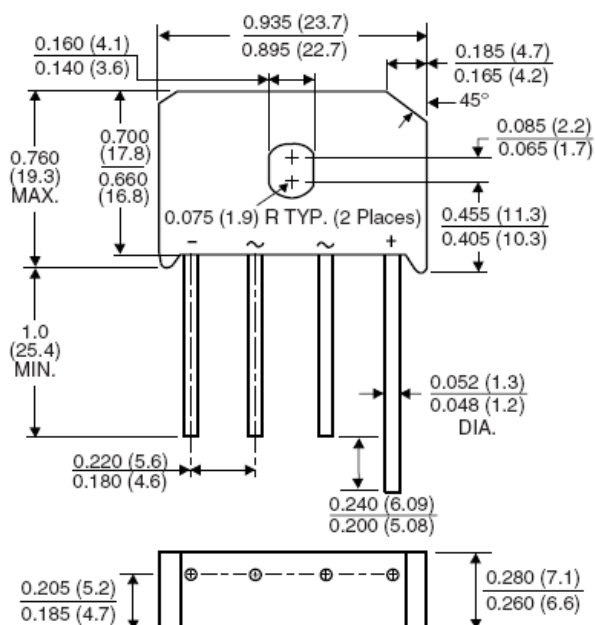

TU

How to contact us

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 824-8766 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.comHttp://www.taitroncomponents.com**TAITRON COMPONENTS MEXICO, S.A .DE C.V.**BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.
42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONENTS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931

TAITRON
 components incorporated

Rev. B/AH 2007-09-18