



## TX6201 Series

## 250mA Low Power LDO

### Features

- Low voltage drop: 0.17V@100mA
- High input voltage: 12V
- Low temperature coefficient
- Large Output Current: >0.5A
- Low Quiescent Current: 2.0uA
- Output voltage accuracy: tolerance  $\pm 2\%$
- Built-in current limiter
- SOT89, SOT23-3 and SOT23-5 packages

### Applications

- Battery-powered equipment
- Hand-Hold Equipment
- GRS Receivers
- Wireless LAN

### General Description

The TX6201 series is a group of positive voltage output, three-pin regulators, that provide a high current even when the input/output voltage differential is small. Low power consumption and high accuracy is achieved through CMOS and laser trimming technologies.

The TX6201 consists of a high-precision voltage reference, an error amplification circuit, and a current limited output driver. Transient response to load variations have improved in comparison to the existing series. SOT89 and SOT23-3 packages are available.

### Selection Table

| Part No.    | Output Voltage | Package                   | Marking |
|-------------|----------------|---------------------------|---------|
| TX6201-30xx | 3.0V           | SOT89<br>SOT23<br>SOT23-5 | 130N    |
| TX6201-33xx | 3.3V           |                           | 133N    |
| TX6201-40xx | 4.0V           |                           | 140N    |
| TX6201-45xx | 4.5V           |                           | 145N    |
| TX6201-50xx | 5.0V           |                           | 150N    |

### Order Information

TX6201-①②③④

| Designator | Symbol  | Description              |
|------------|---------|--------------------------|
| ① ②        | Integer | Output Voltage(1.5~5.0V) |
| ③          | P       | Package:SOT89            |
|            | M       | Package:SOT23-3          |
|            | M5      | Package:SOT23-5          |
| ④          | R       | RoHS / Pb Free           |
|            | G       | Halogen Free             |


Note: "①②" stands for output voltages. Other voltages can be specially customized



## TX6201 Series


## 250mA Low Power LDO

### Block Diagram

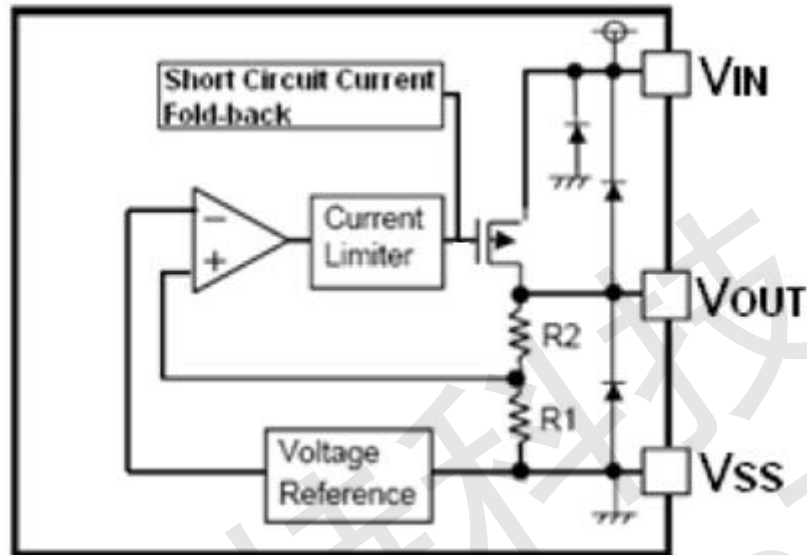


### Pin Assignment


SOT89 (Top view)



SOT23-3 (Top view)



SOT23-5(Top view)

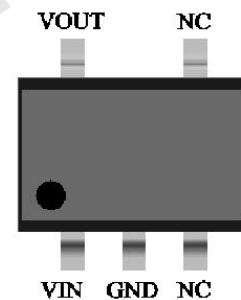

### Absolute Maximum Ratings

Supply Voltage .....-0.3V to 15V

Storage Temperature .....-40°C to 125°C

Operating Temperature .....-40°C to 85°C

Note: These are stress ratings only. Stresses exceeding the range specified under “Absolute Maximum Ratings” may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.



## TX6201 Series

## 250mA Low Power LDO

### Electrical Characteristics

TX6201 for any output voltage

(Ta=25℃)

| Parameter                                     | Symbol                                                | Conditions                       | Min.      | Typ. | Max.      | Unit  |
|-----------------------------------------------|-------------------------------------------------------|----------------------------------|-----------|------|-----------|-------|
| Output Voltage                                | Vout                                                  | Vin=Vout+1V<br>1.0mA≤Iout≤30mA   | Vout×0.98 | --   | Vout×1.02 | V     |
| Output Current*1                              | Iout                                                  | Vin-Vout=1V                      | --        | 250  | --        | mA    |
| Low dropout*2                                 | Vdrop                                                 | Refer to the next table          |           |      |           |       |
| Line Regulation                               | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | 1.6V≤Vin≤8V<br>Iout=100mA        | --        | 0.05 | 0.2       | %/V   |
| Load Regulation                               | ΔVout                                                 | Vin= Vout+1V<br>1.0mA≤Iout≤100mA | --        | 12   | 30        | mV    |
| Output voltage<br>Temperature<br>Coefficiency | $\frac{\Delta V_{OUT}}{\Delta Ta}$                    | Iout=30mA<br>0℃≤Ta≤70℃           | --        | ±100 | --        | Ppm/℃ |
| Supply Current                                | Iss1                                                  | --                               | --        | 2    | --        | uA    |
| Input Voltage                                 | Vin                                                   | --                               | --        | --   | 15        | V     |

### Electrical Characteristics by Output Voltage:


| Output Voltage Vout(V) | Dropout Voltage Vdif (V) |      |      |
|------------------------|--------------------------|------|------|
|                        | Conditions               | Typ. | Max. |
| Vout ≤ 2.0V            | Iout=60 mA               | 0.1  | 0.12 |
| 2.0 < Vout ≤ 3.0       | Iout=80 mA               | 0.12 | 0.14 |
| 3.0 < Vout ≤ 4.0       | Iout=100 mA              | 0.16 | 0.18 |
| 4.0 < Vout ≤ 5.0       |                          | 0.17 | 0.18 |
| 3.0 < Vout ≤ 4.0       | Iout=200 mA              | 0.21 | 0.24 |
| 4.0 < Vout ≤ 14.0      |                          | 0.20 | 0.22 |
| 3.0 < Vout ≤ 4.0       | Iout=500 mA              | 0.7  | 0.75 |
| 4.0 < Vout ≤ 14.0      |                          | 0.72 | 0.76 |



## TX6201 Series

## 250mA Low Power LDO

### Typical Application

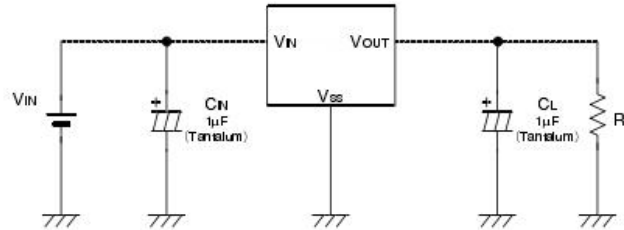


Note1: Input capacitor  $C_{IN}=1\mu F$ .

Note2: Output capacitor  $C_{OUT}=1\mu F/6.8\mu F$  (1uF Tantalum capacitor or 6.8uF ceramic capacitor is recommended).

### Typical Performance Characteristics

(1) Output Voltage vs Input voltage and Output Voltage vs. Output Current and Input Transient Response

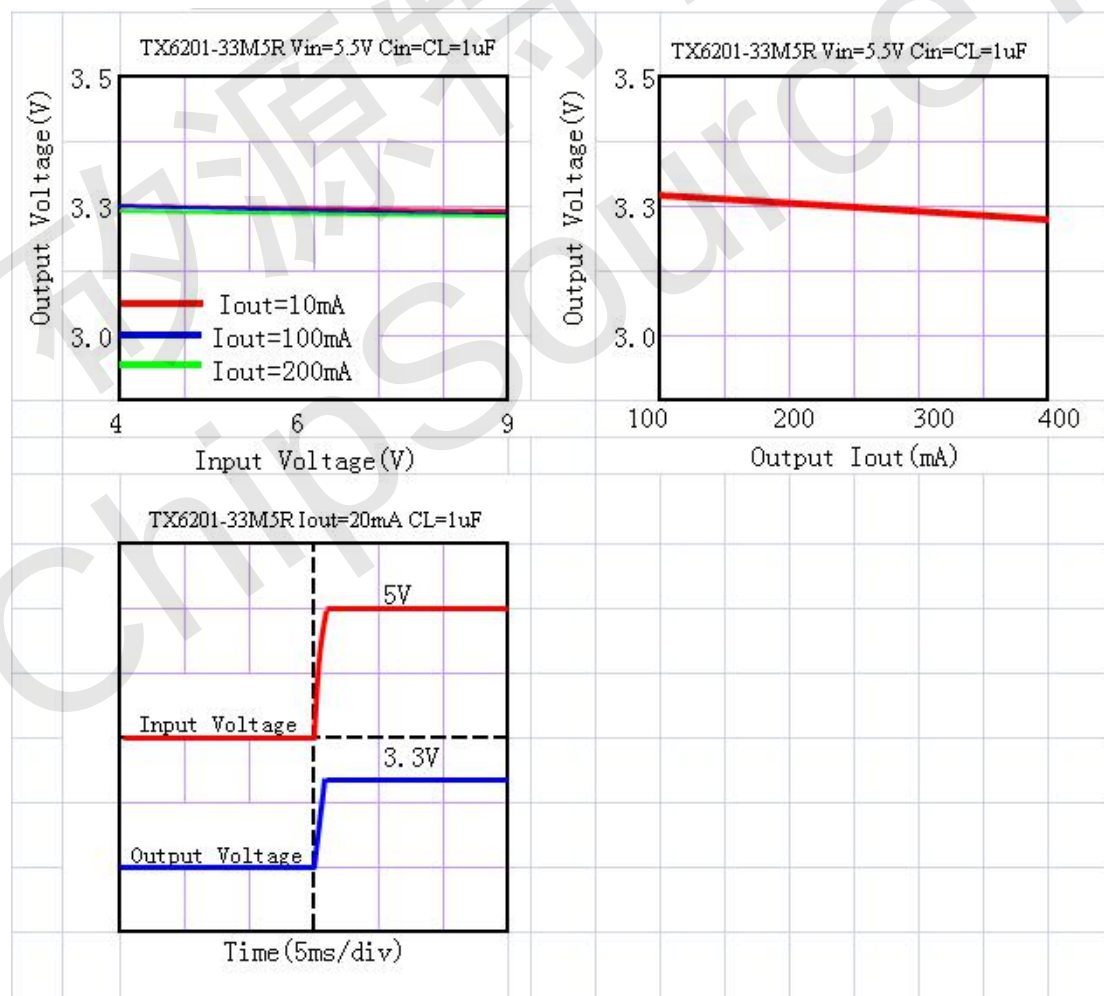




## **TX6201 Series**

## **250mA Low Power LDO**

(2) Output Voltage vs. Ambient Temperature

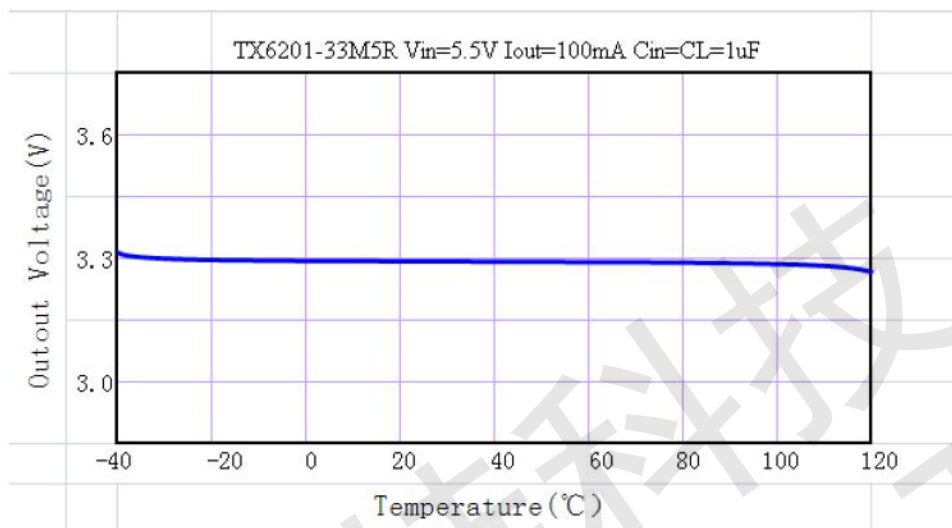




## TX6201 Series

## 250mA Low Power LDO

### Package Information

### 3-pin SOT89 Outline Dimensions

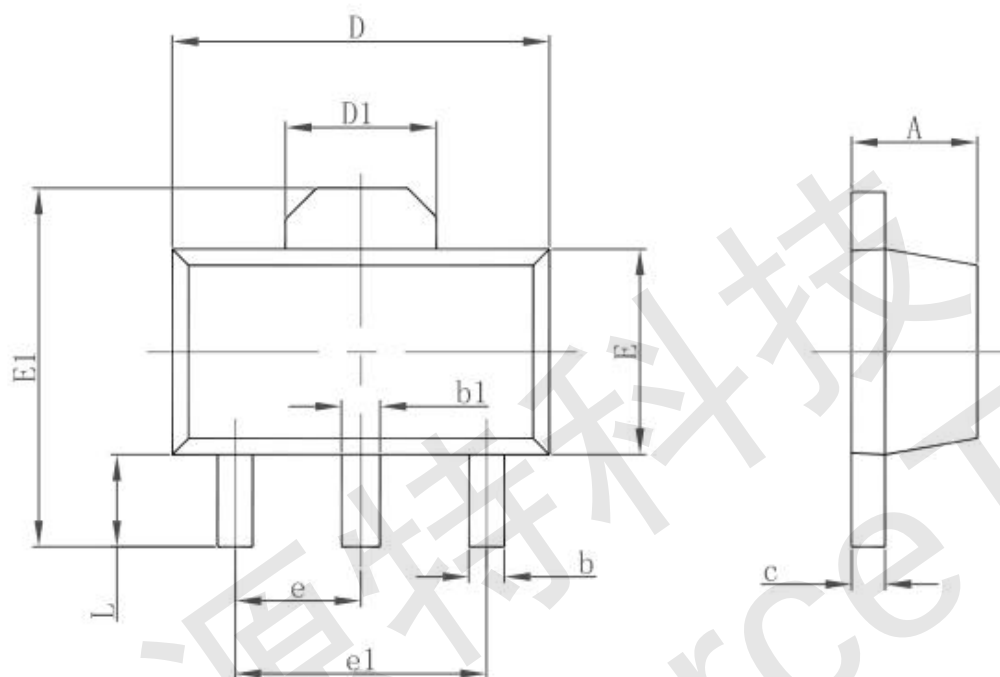


| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min.                      | Max.  | Min.                 | Max.  |
| A      | 1.400                     | 1.600 | 0.055                | 0.063 |
| b      | 0.320                     | 0.520 | 0.013                | 0.020 |
| b1     | 0.400                     | 0.580 | 0.016                | 0.023 |
| c      | 0.350                     | 0.440 | 0.014                | 0.017 |
| D      | 4.400                     | 4.600 | 0.173                | 0.181 |
| D1     | 1.550 REF.                |       | 0.061 REF.           |       |
| E      | 2.300                     | 2.600 | 0.091                | 0.102 |
| E1     | 3.940                     | 4.250 | 0.155                | 0.167 |
| e      | 1.500 TYP.                |       | 0.060 TYP.           |       |
| e1     | 3.000 TYP.                |       | 0.118 TYP.           |       |
| L      | 0.900                     | 1.200 | 0.035                | 0.047 |



## TX6201 Series

## 250mA Low Power LDO

### 3-pin SOT23-3 Outline Dimensions

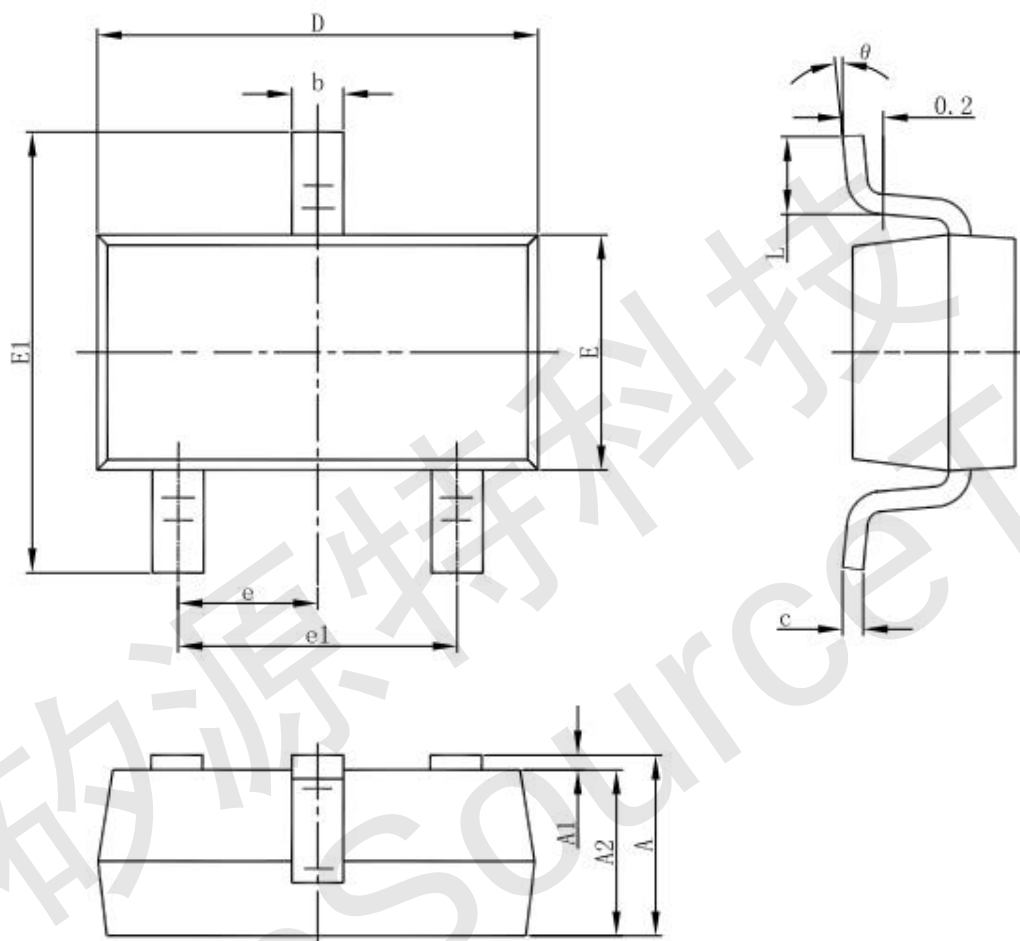


| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.050                     | 1.250 | 0.041                | 0.049 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 1.050                     | 1.150 | 0.041                | 0.045 |
| b      | 0.300                     | 0.500 | 0.012                | 0.020 |
| c      | 0.100                     | 0.200 | 0.004                | 0.008 |
| D      | 2.820                     | 3.020 | 0.111                | 0.119 |
| E      | 1.500                     | 1.700 | 0.059                | 0.067 |
| E1     | 2.650                     | 2.950 | 0.104                | 0.116 |
| e      | 0.950(BSC)                |       | 0.037(BSC)           |       |
| e1     | 1.800                     | 2.000 | 0.071                | 0.079 |
| L      | 0.300                     | 0.600 | 0.012                | 0.024 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |



## TX6201 Series

## 250mA Low Power LDO

### SOT23-5 Outline Dimensions

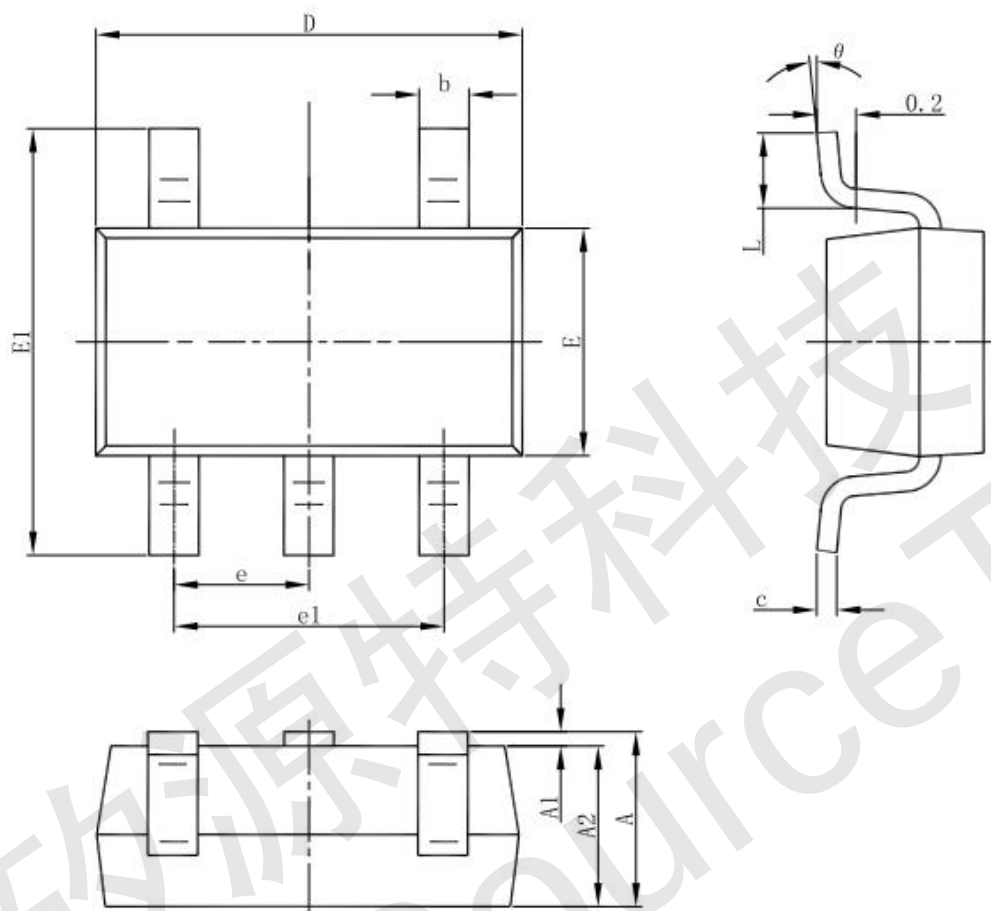

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.050                     | 1.250 | 0.041                | 0.049 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 1.050                     | 1.150 | 0.041                | 0.045 |
| b      | 0.300                     | 0.500 | 0.012                | 0.020 |
| c      | 0.100                     | 0.200 | 0.004                | 0.008 |
| D      | 2.820                     | 3.020 | 0.111                | 0.119 |
| E      | 1.500                     | 1.700 | 0.059                | 0.067 |
| E1     | 2.650                     | 2.950 | 0.104                | 0.116 |
| e      | 0.950(BSC)                |       | 0.037(BSC)           |       |
| e1     | 1.800                     | 2.000 | 0.071                | 0.079 |
| L      | 0.300                     | 0.600 | 0.012                | 0.024 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |



深圳市矽源特科技有限公司  
ShenZhen ChipSourceTek Technology Co. ,Ltd.



***TX6201 Series***

***250mA Low Power LDO***

矽源特科技  
ChipSourceTek

---

TEL: +86-0755-27595155 27595165

FAX: +86-0755-27594792

WEB: [Http://www.ChipSourceTek.com](http://www.ChipSourceTek.com)

E-mail: [Tony.Wang@ChipSourceTek.com](mailto:Tony.Wang@ChipSourceTek.com) [InFo@ChipSourceTek.com](mailto:InFo@ChipSourceTek.com)