

RF AMPLIFIER

MODEL TZ9409

Available as: TZ9409, 4 Pin TO-8 (T4)
 TN9409, 4 Pin Surface Mount (SM3)
 FP9409, 4 Pin Flatpack (FP4)
 BX9409, Connectorized Housing (H1)
 PN9409, Reduced Size Surface Mount (SM11)

Features

- Low Cost
- Cascadable
- Operating Temp. -55 °C to +85 °C
- Environmental Screening Available

Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +43 dBm (Typ.)
 Second Order Two Tone Intercept Point +38 dBm (Typ.)
 Third Order Two Tone Intercept Point +26 dBm (Typ.)

Specifications


CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 400 MHz	5 - 400 MHz
Gain (dB)	12.5	11.0 Min.
Power @ 1 dB Comp. (dBm)	+14.5	+12.5 Min.
Reverse Isolation (dB)	-21.5	-20 Max.
VSWR In	<1.75:1	2.0:1 Max.
Out	<2.0:1	2.2:1 Max.
Noise Figure (dB)	<5.5	6.5 Max.
Power Vdc	+15	+15
mA	50	55 Max.

Note: Care should always be taken to effectively ground the case of each unit.

Maximum Ratings

Ambient Operating Temperature -55°C to +100 °C
 Storage Temperature -62°C to +125 °C
 Case Temperature +125 °C
 DC Voltage +18 Volts
 Continuous RF Input Power +13 dBm
 Short Term RF Input Power..... 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

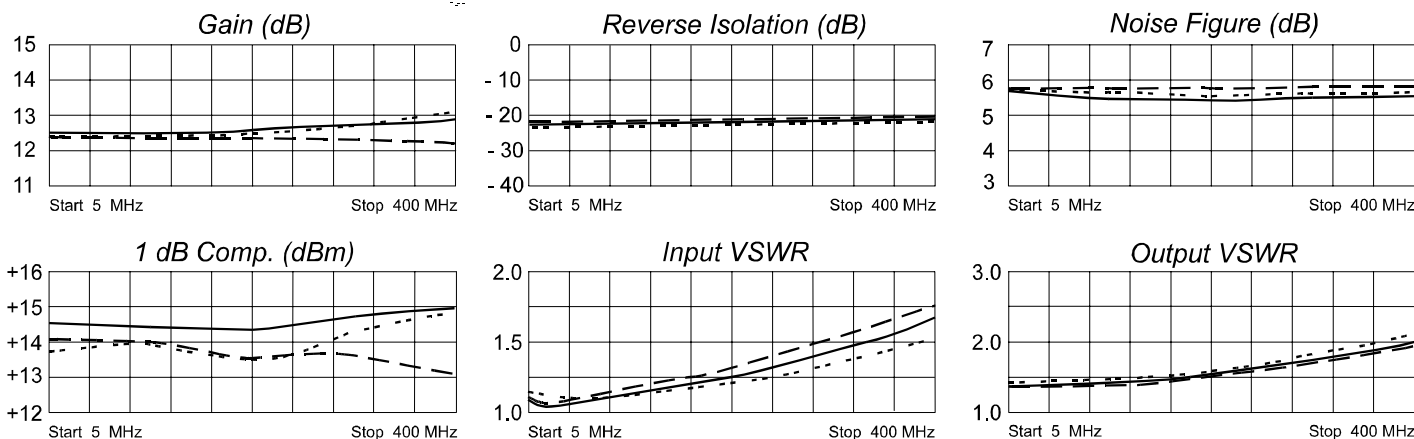

Legend ——— +25 °C - - - +85 °C -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.02	-102	4.48	-178	.07	4	.15	- 8
50	.03	-103	4.48	171	.07	1	.15	- 23
100	.05	-100	4.49	160	.07	0	.17	- 43
200	.11	-100	4.55	140	.07	- 1	.21	- 78
300	.17	-106	4.65	118	.08	- 2	.28	-109
400	.25	-114	4.69	95	.08	- 4	.34	-140



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 01/08/92

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001