



## UC3816A

CMOS IC

### LOW COST POWER-SAVING MODE PWM CONTROLLER FOR FLYBACK CONVERTERS

#### ■ DESCRIPTION


The UTC **UC3816A** provides a CCM/valley switching mixed mode operation for better efficiency performance. The operation mode stays at CCM at heavy load, and switch to valley switching at light load.

The UTC **UC3816A** is a high performance current mode PWM controller ideally suited for low standby power. Low  $V_{CC}$  startup current make the power reliable on startup design and a large value resistor could be used in the startup circuit to minimize the standby power. At no load condition, the IC operates in power-saving mode for lower standby power, decreasing frequency for Higher conversion efficiency at light load condition.

The UTC **UC3816A** contains protection with automatic recovery including OLP (over load protection), OCP (cycle-by-cycle current limiting), and UVLO ( $V_{CC}$  over voltage clamp and under voltage lockout). It also provides the protections including OTP (over temperature protection), BNO(AC Brown Out protection) , LNO(AC Over voltage protection), OVP ( $V_{CC}$  or DC output over voltage protection) with automatic recovery. To protect the power MOSFET, Gate-drive output is fixed up to 16V max.

The internal slope compensation improves system stability at high PWM duty cycle output. Leading-edge blanking on current sense input removes the signal glitch, which offering minima external component count in the design. Excellent EMI performance is achieved with UTC proprietary frequency hopping technique (ZL201020615247.1) together with soft driver control. Audio noise is eliminated due to switch frequency more than 20kHz during operation.

UTC **UC3816A** is packaged by using tiny SOT-26 package. It has such applications as: battery charger, power adaptor, set-top box power supplies, ink jet printers, open-frame SMPS.




SOT-26

#### ■ FEATURES


- \* Proprietary frequency hopping for Improved EMI performance
- \* Cycle-by-cycle current limiting
- \* CCM/Valley Switching Operation
- \* Fixed switch frequency 60~70kHz
- \* Dynamic peak current limiting for constant output power
- \* Built-in synchronized slope compensation
- \* Gate output voltage clamped at 16V
- \* Adjustable DC output OVP
- \* OLP/ $V_{CC}$  OVP/OTP/BNO/LNO (automatic recovery)
- \* Internal Soft Start

## ■ ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
UC3816AL-AG6-R	UC3816AG-AG6-R	SOT-26	Tape Reel
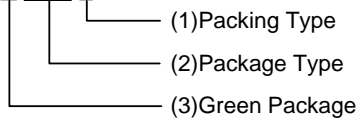
<p>UC3816AG-AG6-R</p>  <p>(1) Packing Type (2) Package Type (3) Green Package</p>	<p>(1) R: Tape Reel (2) AG6: SOT-26 (3) G: Halogen Free and Lead Free, L: Lead Free</p>
--	---

## ■ MARKING




## PIN CONFIGURATION

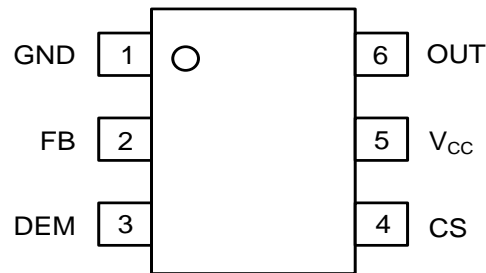

## PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	GND	Ground
2	FB	Feedback input pin. The PWM duty cycle is determined by voltage level into this pin and SENSE pin input
3	DEM	Demagnetization detection signal. This pin can also provide adjustable output voltage OVP and AC brown in/out protection
4	CS	Current sense input pin. Connected to MOSFET current sensing resistor node
5	V <sub>CC</sub>	Power supply
6	OUT	The totem-pole output driver for driving the power MOSFET

## BLOCK DIAGRAM

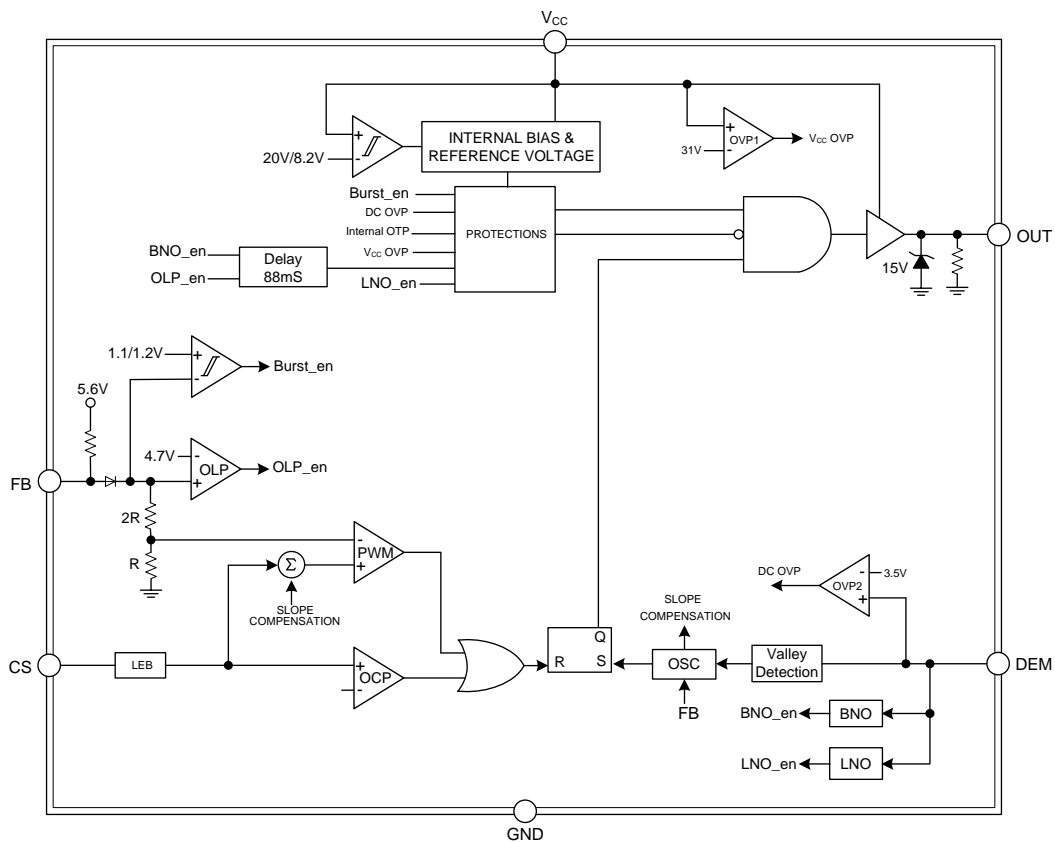

## ■ ABSOLUTE MAXIMUM RATING

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{CC}$	-0.3 ~ 36	V
Input Voltage to OUT Pin	$V_{OUT}$	-0.3 ~ $V_{CC}+0.3$	V
FB, CS, DEM		-0.3 ~ 6	V
Power Dissipation @ $T_A=+25^{\circ}\text{C}$	$P_D$	400	mW
Junction Temperature	$T_J$	+150	$^{\circ}\text{C}$
Operating Ambient Temperature	$T_{OPR}$	-40 ~ +125	$^{\circ}\text{C}$
Storage Temperature Range	$T_{STG}$	-65 ~ +150	$^{\circ}\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.

Absolute maximum ratings are stress ratings only and functional device operation is not implied.

## ■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	$V_{CC}$	11 ~ 28	V
Start up Resistor		0.86 ~ 4.4	$M\Omega$
$V_{CC}$ Capacitor		2.2 ~ 4.7	$\mu\text{F}$

## ■ THERMAL DATA

PARAMETER	SYMBOL	RATING	UNIT
Junction to Ambient	$\theta_{JA}$	250	$^{\circ}\text{C/W}$

## ■ ELECTRICAL CHARACTERISTICS ( $V_{CC}=15\text{V}$ , $T_A=25^{\circ}\text{C}$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
<b>Supply Voltage</b>						
$V_{CC}$ (ON)		UC3816A/B	18	20	22	V
		UC3816C	13	15	17	V
$V_{CC}$ (OFF)		UC3816A/B	7	8.2	9.5	V
		UC3816C	6.7	7.7	8.8	V
Startup Current		$V_{CC} < V_{CC(ON)} - 0.5\text{V}$		3.5	15	$\mu\text{A}$
Operating Current		$V_{FB}=3\text{V}$		0.8		mA
		$V_{FB}=\text{Burst Level}$		0.5		mA
$V_{CC}$ OVP Threshold			29	31	33	V
<b>Oscillator &amp; Switching Frequency</b>						
Switching Frequency		Test in Testmode	60	65	70	KHz
Temperature Stability		Guaranteed by Design			10	%
Voltage Stability					10	%
Green Mode Frequency		Test in Testmode	20			KHz
Frequency Spreading Range		Guaranteed by Design	+9		-9	%
Max. Duty Cycle	$DC_{MAX}$	$V_{FB}=3.9\text{V}$	58	62	66	%
<b>Voltage Feedback</b>						
Open Loop Voltage			5.00	5.4	5.8	V
OLP Level			4.40	4.65	4.9	V
OLP De-Bounce Time		$V_{FB}>5\text{V}$	60	88	120	mS
Burst-Mode Enter FB Voltage	$V_{FB-IN}$			1.07		V
Burst-Mode Quit FB Voltage	$V_{FB-OUT}$			1.13		V
FB Pin Short Current				120		$\mu\text{A}$
<b>Current Sensing</b>						
Current Limiting Threshold Voltage with 40% Duty	$V_{CS(OFF)}_{40\% \text{ Duty}}$	Guaranteed by Design	0.83	0.85	0.87	V
Current Limiting Threshold Voltage with 0% Duty	$V_{CS(OFF)}_{0\% \text{ Duty}}$	Read CS pin in Testmode	0.52	0.57	0.62	V

■ **ELECTRICAL CHARACTERISTICS** ( $V_{CC}=15V$ ,  $T_A=25^{\circ}C$ , unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Lead Edge Blanking Time	$T_{LEB}$	Guaranteed by Design		350		ns
Soft Start Time				6		mS
<b>Gate Drive Output</b>						
Output Low Level		$V_{CC}=15V$ , $I_{OUT}=-20mA$			1	V
Output High Level		$V_{CC}=15V$ , $I_{OUT}=20mA$	9			V
Rising Time	$t_R$	10% to 90% of $V_{OUT}$ , $C_L=1nF$		300		nS
Falling Time	$t_F$	90% to 10% of $V_{OUT}$ , $C_L=1nF$		60		nS
Out Clamping		$V_{CC}=20V$		15		V
<b>Demagnetization (DEM) Detection</b>						
DEM OVP Sampling Instant		Guaranteed by Design		3		$\mu S$
DEM OVP Threshold Level			3.4	3.55	3.7	V
DEM OVP De-Bounce Time		Guaranteed by Design		4		Cycles
Demagnetization Detection Level		Guaranteed by Design		220		mV
Demagnetization Delay		Guaranteed by Design		200		nS
DEM_BNI		Guaranteed by Design	47	51	55	$\mu A$
DEM_BNO			42.5	46	49.5	$\mu A$
BNO De-Bounce Time			60	88	120	mS
<b>Thermal Shut Down</b>						
OTP Threshold				150		$^{\circ}C$

## ■ APPLICATION NOTE

The UTC **UC3816A** devices integrate many useful designs into one controller for low-power switch-mode power supplies. The following descriptions highlight some of the features of the UTC **UC3816A** series.

### Start-up Current

The start-up current is only 3.5 $\mu$ A. Low start-up current allows a start-up resistor with a high resistance and a low-wattage to supply the start-up power for the controller. For AC/DC adaptor with universal input range design, a 2.5~3M $\Omega$ , 1/8W startup resistor could be used together with a  $V_{CC}$  capacitor to provide a fast startup and low power dissipation solution. The D1 1N4148 can improve surge capability to 6.6KV.


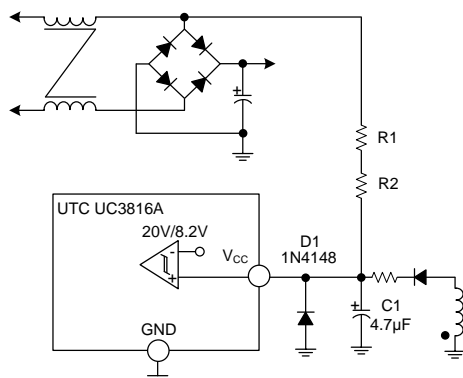


Fig. 1 Startup Circuit

### Operation Mode

The UTC **UC3816A** provides a CCM/valley switching mixed mode operation for better efficiency performance. The operation mode stays at CCM at heavy load, once if the converter enters into DCM, the UTC **UC3816A** automatically finds the local minimum  $V_{DS}$  point and switching at this local valley.

Normally, the conduction loss is dominated at heavy load condition, and the switching loss turns to be larger than conduction loss in light load, especially at 1/4 ~ 1/2 of full load. By this kind of mixed mode operation to have CCM in heavy load and valley switching in light load can optimize the overall average efficiency during the entire operation range.

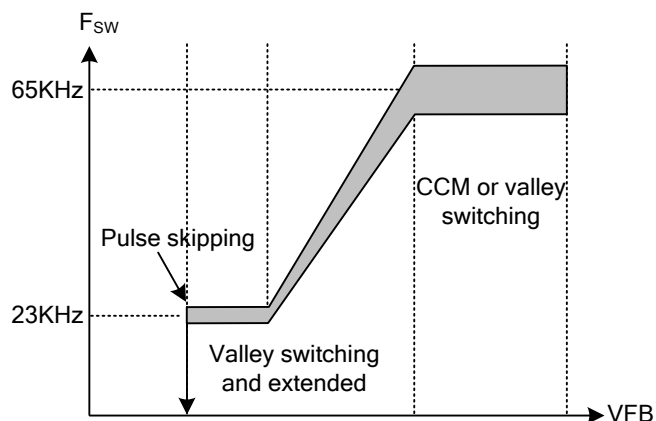

### ■ APPLICATION NOTE (Cont.)

As shown in Fig. 3, at deep light-load or no-load condition, the switching loss is the dominant factor. To improve the light-load efficiency, burst mode operation will stop the switching cycle of the OUT pin when FB pin voltage is below “V<sub>FB\_IN</sub>” Level and restart the switching cycle of the OUT pin when FB pin voltage is above “V<sub>FB\_OUT</sub>”.

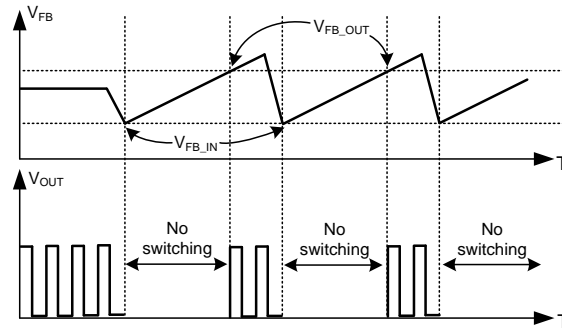


Fig. 3 Burst Mode Operation

### Over Voltage Protection on V<sub>CC</sub> Pin ( V<sub>CC</sub> OVP )

The V<sub>CC</sub> OVP will shut down the switching of the power MOSFET whenever V<sub>CC</sub> > V<sub>OVP</sub>. The OVP event as followed Fig.4.

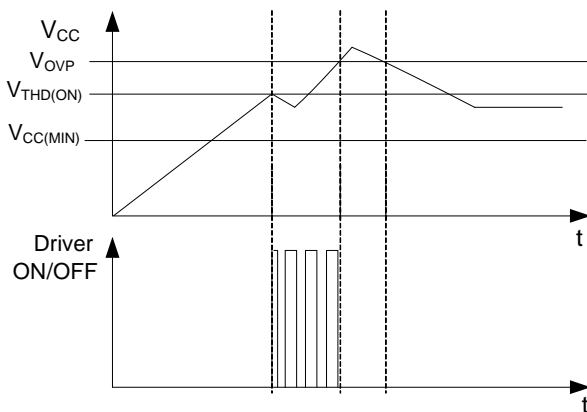


Fig.4 OVP case

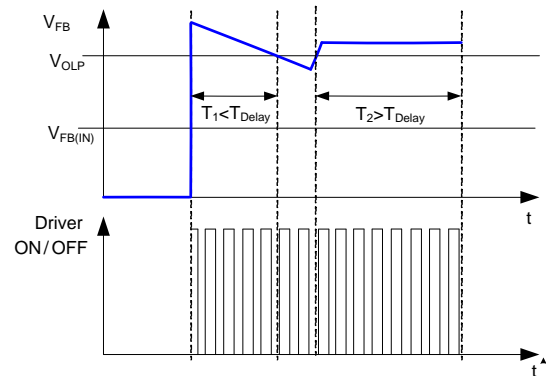


Fig.5 OLP case

### Over Load & Open Loop & Output Short Protection ( OLP or OSP )

OLP or OSP will shut down driver when V<sub>FB</sub> > V<sub>OLP</sub> for continual a blanking time. The OLP or OSP event as followed Fig.5.

### Over Temperature Protection ( OTP )

OTP will shut down driver when the NTC resistor temperature T<sub>J</sub> > T<sub>(THR)</sub>.

### Brown in/out & DEM OVP Protection

To prevent high current stress at too low AC voltage condition, the UTC **UC3816A** implements an AC brown in/out protection through the DEM pin. The current sourcing out from the DEM pin when the OUT pin is enabled is monitored to have the AC input voltage level information. When the current keeps above the DEM\_BNI threshold (50μA, typ.) for more than BNI De-bounce time 7 cycles, the AC brown in condition is issued and the OUT is enabled. Once if the current keeps under the DEM\_BNO threshold (45.5μA, typ.) for more than BNO De-bounce time, the AC brown out condition is issued and the OUT is disabled.

The equation is used to calculate the brown in/out level:

$$V_{AC\_BNI} = 50\mu \times \frac{R_{DEM\_U}}{\sqrt{2}} \times \frac{N_{PRI}}{N_{AUX}}, \quad V_{AC\_BNO} = 45.5\mu \times \frac{R_{DEM\_U}}{\sqrt{2}} \times \frac{N_{PRI}}{N_{AUX}}$$

## ■ APPLICATION NOTE (Cont.)

An over voltage protection for  $V_o$  is fulfilled by sampling the voltage on the DEM waveform after OUT is turn-off. After a short delay after OUT off, the sampled voltage is compared to the internal over voltage reference is determined whether if an OVP event is occurred. The internal over voltage reference is biased at 3.5V, users can define the resistor divider ratio by the equation below based on the desired OVP level:

$$V_{O\_OVP} = 3.5 \times \frac{R_{DEM\_U} + R_{DEM\_D}}{R_{DEM\_D}} \times \frac{N_{SEC}}{N_{AUX}}$$

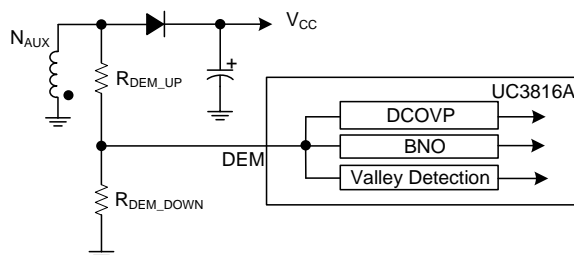


Fig. 6 DEM-Pin Divider

## Cycle by Cycle Over-Current Protection ( OCP )

In a Flyback topology converter, the main MOSFET switch of the Flyback converter turns on and off rapidly. The energy is stored in the inductor when the MOSFET turns on. The inductor current flowing through the sensing resistor ( $R_{CS}$ ) is shown in Fig.7. The current limit is determined by the equation below:

$$I_{PEAK} = \frac{V_{CS}}{R_{CS}}$$

In order to prevent the CS pin from false triggering, an internal leading edge blanking time (350nS Typ.) is added and an external low pass RC filter is also recommended to filter the turn-on spike of CS node.


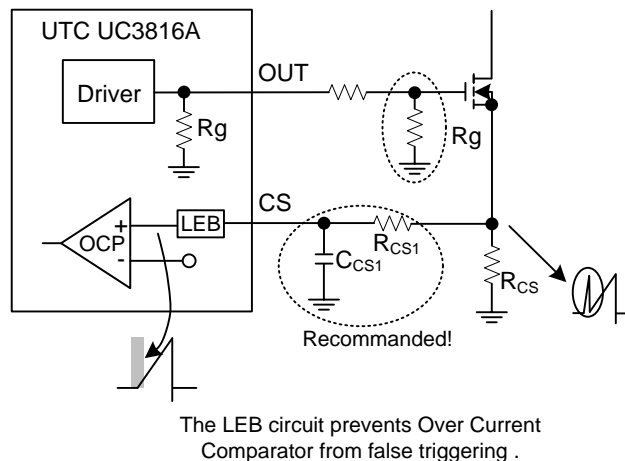


Fig. 7 Current Sensing



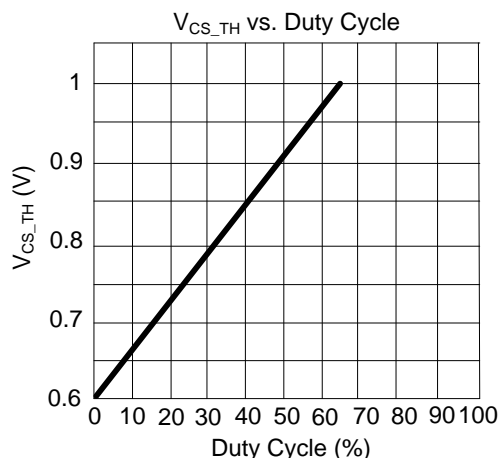

**UNISONIC TECHNOLOGIES CO., LTD**  
[www.unisonic.com.tw](http://www.unisonic.com.tw)