



UD32121

LINEAR INTEGRATED CIRCUIT


1.2A, 32V, 1.4MHz STEP-DOWN CONVERTER

DESCRIPTION

The UTC **UD32121** is a monolithic step-down switching mode converter with a built-in power MOSFET. It regulates input voltages from 4.5V to 32V down to an output voltage as low as 0.81V, and supplies up to 1.2A of load current.

Current mode operation provides fast transient response and eases loop stabilization. Fault condition protection includes cycle-by-cycle current limiting and thermal shutdown.

The UTC **UD32121** requires a minimum number of readily available standard external components.



SOT-26

APPLICATIONS

- * Distributed Power Systems
- * Battery Charger
- * Pre-Regulator for Linear Regulators
- * WLED Drivers

FEATURES


- * 1.2A Peak Output Current
- * 0.35Ω Internal Power MOSFET Switch
- * Stable with Low ESR Output Ceramic Capacitors
- * Up to 92% Efficiency
- * 0.1μA Shutdown Mode
- * Fixed 1.4MHz Frequency
- * Thermal Shutdown
- * Cycle-by-Cycle Over Current Protection
- * Wide 4.5V to 32V Operating Input Range
- * Output Adjustable from 0.81V to 15V

ORDERING INFORMATION


Ordering Number		Package	Packing
Lead Free	Halogen Free		
UD32121L-AG6-R	UD32121G-AG6-R	SOT-26	Tape Reel

UD32121G-AG6-R		(1) Packing Type	(1) R: Tape Reel
		(2) Package Type	(2) AG6: SOT-26
		(3) Green Package	(3) G: Halogen Free and Lead Free, L: Lead Free

MARKING




PIN CONFIGURATION

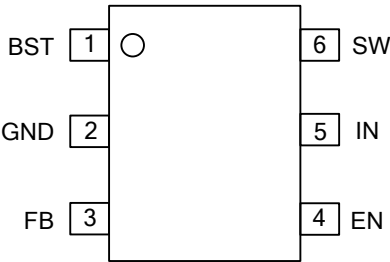

PIN DESCRIPTION

PIN NO.	PIN NAME	DESCRIPTION
1	BST	High-Side Gate Drive Boost Input. BS supplies the drive for the high-side N-Channel MOSFET switch. Connect a 0.01 μ F or greater capacitor from SW to BST to power the high side switch.
2	GND	Ground.
3	FB	Feedback. An external resistor divider from the output to GND, tapped to the FB pin sets the output voltage. To prevent current limit run away during a short circuit fault condition, the frequency foldback comparator lowers the oscillator frequency when the FB voltage is below 250mV.
4	EN	On/Off Control Input. Pull EN above 1.2V to turn the device on. For automatic enable, connect a 100k Ω resistor between this pin and Vin pin.
5	V _{IN}	Supply Voltage. The UD32121 operates from a +4.5V to +32V unregulated input. C1 is needed to prevent large voltage spikes from appearing at the input.
6	SW	Power Switching Output. SW is the switching node that supplies power to the output. Connect the output LC filter from SW to the output load. Note that a capacitor is required from SW to BS to power the high-side switch.

■ BLOCK DIAGRAM

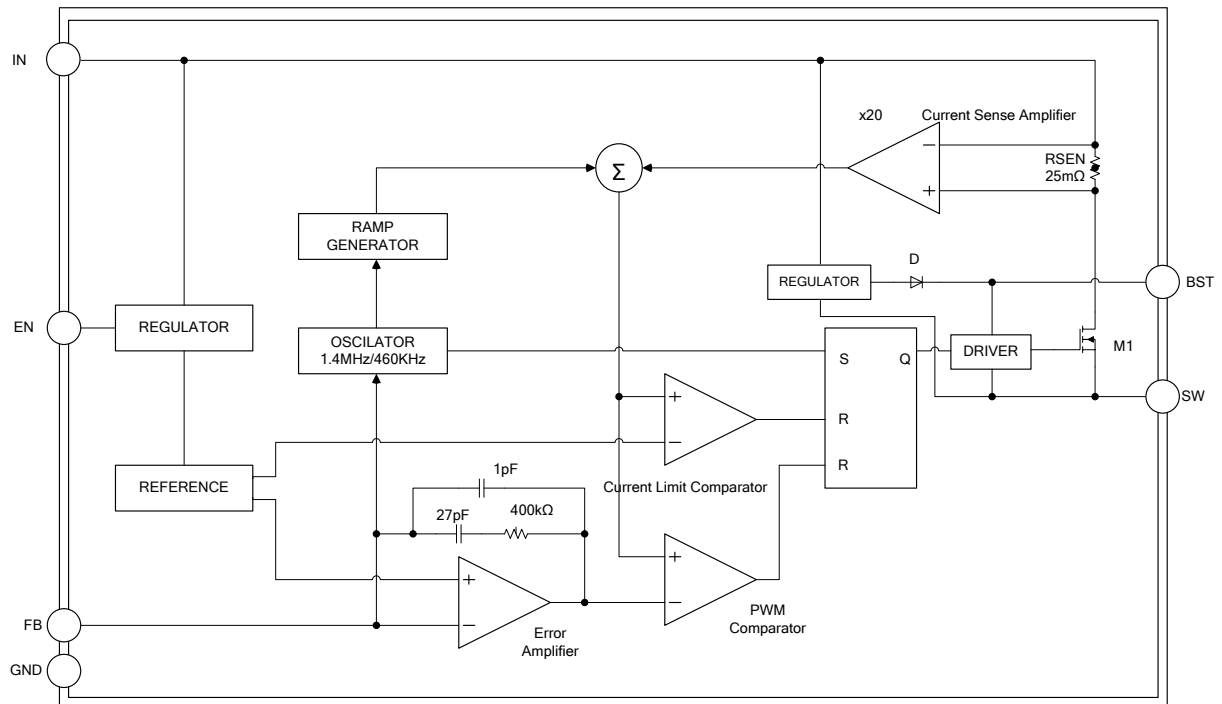

■ ABSOLUTE MAXIMUM RATING ($T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	RATINGS	UNIT
V_{CC} Pin Voltage	V_{IN}	33	V
SW Pin Voltage	V_{SW}	33	V
BOOST Trap Voltage	V_{BST}	$V_{SW} + 6V$	V
All Other Pins Voltage		-0.3V ~ + 6V	V
Power Dissipation	P_D	380	mW
Junction Temperature Range	T_J	+150	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 ~ +150	$^{\circ}\text{C}$

Notes: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ RECOMMENDED OPERATING CONDITIONS

PARAMETER	SYMBOL	RATINGS	UNIT
Input Supply Voltage	V_{IN}	4.5 ~ 32	V
Output Voltage	V_{OUT}	0.81 ~ 15	V
Ambient Temperature	T_A	-40 ~ +125	$^{\circ}\text{C}$
input current into the EN pin		300	μA

Note: The device is not guaranteed to function outside of its operating conditions.

■ THERMAL CHARACTERISTICS

PARAMETER	SYMBOL	RATINGS	UNIT
Junction To Ambient	θ_{JA}	260	$^{\circ}\text{C}/\text{W}$


■ ELECTRICAL CHARACTERISTICS

($V_{IN} = 12V$, $T_A=25^{\circ}\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Quiescent Current	I_Q	$V_{EN}=2V$, $V_{FB}=1V$		0.8		mA
Shutdown Current	I_{SHDN}	$V_{EN}=0V$.		1	3	μA
Switch-On Resistance (Note 6)	R_{DS-ON}			0.35		Ω
Switch Leakage Current	I_{SW_LKG}	$V_{EN}=0V$, $V_{SW}=0V$			10	μA
Current Limit (Note 6)	I_{LIMIT}			1.8		A
Oscillation frequency	F_{SW}			1.4		MHz
Fold-Back Frequency	F_{SB}	$V_{FB}=0V$		460		KHz
Max Duty Cycle	D_{MAX}	$V_{FB}=0.6V$		87		%
Minimum On Time (Note 6)	T_{ON_MIN}			100		nS
Feedback Voltage	V_{FB}	$4.5V \leq V_{IN} \leq 24V$	0.790	0.810	0.830	mV
EN Input High Voltage	V_{EN_H}	V_{EN} Rising	1.2			V
EN Input Low Voltage					0.4	mV
EN input current		$V_{EN}=2V$		2.1		μA
		$V_{EN}=0V$		0.1		
V_{IN} UVLO Threshold-Rising	$V_{UVLO(Vth)}$	V_{IN} Rising		2.8		V
V_{IN} UVLO Threshold Hysteresis				150		mV
Thermal Shutdown (Note 6)	T_{SD}			150		$^{\circ}\text{C}$
Thermal Hysteresis (Note 6)				25		$^{\circ}\text{C}$

Note: Guaranteed by design.

■ TYPICAL APPLICATION CIRCUIT

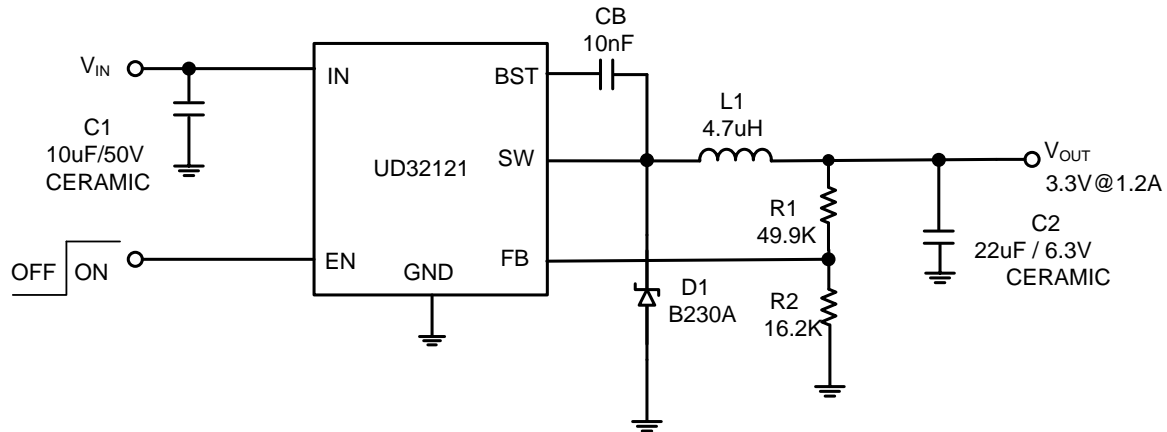

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. UTC reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.