

UDZ2.4B-FL THRU UDZ36B-FL

List

List.....	1
Package outline.....	2
Features.....	2
Mechanical data.....	2
Maximum ratings	2
Electrical characteristics.....	3
Rating and characteristic curves.....	4
Pinning information.....	5
Suggested solder pad layout.....	5
Packing information.....	6
Reel packing.....	7
Suggested thermal profiles for soldering processes.....	7
High reliability test capabilities.....	8

UDZ2.4B-FL THRU UDZ36B-FL

200mW Surface Mount Zener Diodes


Features

- Zener voltage range selection, 2.4V to 36V
- Flat Lead SOD-323FL small outline plastic package
- Surface device type mounting
- Lead-free parts meet RoHS requirements
- Suffix "-H" indicates Halogen-free part, ex.UDZ2.4B-FL-H

Mechanical data

- Epoxy : UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-323FL
- Terminals :Plated terminals, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Mounting Position : Any
- Weight : Approximated 0.004 gram

Package outline

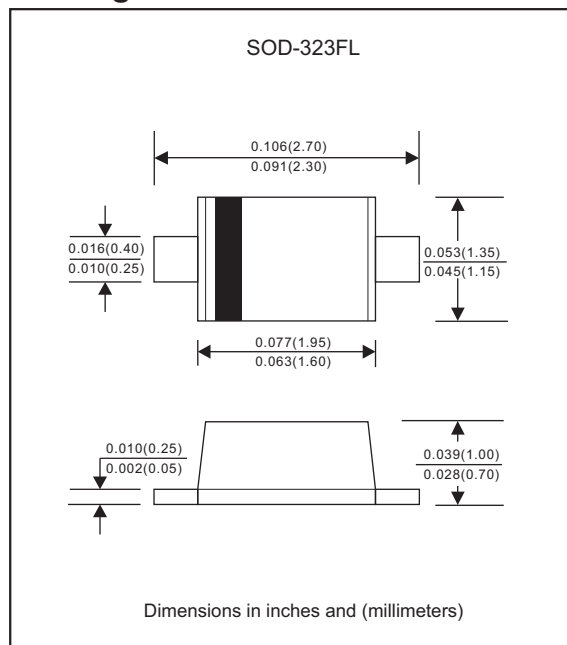

Maximum ratings (at $T_A=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Conditions	Symbol	MIN.	TYP.	MAX.	Unit
Power dissipation		P_D			200	mW
Forward voltage	$I_F = 10 \text{ mA}$	V_F			1.0	V
Operating junction temperature range		T_J	-65		+150	$^{\circ}\text{C}$
Storage temperature range		T_{STG}	-65		+150	$^{\circ}\text{C}$

These ratings are limiting values above which the serviceability of the diode may be impaired.

UDZ2.4B-FL THRU UDZ36B-FL

Electrical characteristics (at $T_A = 25^\circ\text{C}$ unless otherwise noted)

Part No.	Marking code	Zener voltage		Test current	Zener impedance			Leakage current	
		V _Z @ I _{ZT}		I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _{ZK}	I _R	V _R
		Min.(V)	Max.(V)	mA	(Ω)Max	(Ω)Max	mA	(μA)Max	Volts
UDZ2.4B-FL	D=	2.43	2.63	5	100	1000	0.5	120	1.0
UDZ2.7B-FL	DΞ	2.69	2.91	5	110	1000	0.5	100	1.0
UDZ3.0B-FL	D>	3.01	3.22	5	120	1000	0.5	50	1.0
UDZ3.3B-FL	D<	3.32	3.53	5	120	1000	0.5	20	1.0
UDZ3.6B-FL	D0	3.60	3.85	5	90	600	1.0	4.5	1.0
UDZ3.9B-FL	D1	3.89	4.16	5	90	600	1.0	2.7	1.0
UDZ4.3B-FL	D2	4.17	4.43	5	90	600	1.0	2.7	1.0
UDZ4.7B-FL	D3	4.55	4.75	5	80	500	1.0	2.7	2.0
UDZ5.1B-FL	D4	4.98	5.20	5	60	500	1.0	1.8	2.0
UDZ5.6B-FL	D5	5.49	5.73	5	40	300	1.0	0.9	2.0
UDZ6.2B-FL	D6	6.06	6.33	5	40	150	1.0	2.7	4.0
UDZ6.8B-FL	D7	6.65	6.93	5	30	75	1.0	1.8	4.0
UDZ7.5B-FL	D8	7.28	7.60	5	30	75	1.0	0.9	5.0
UDZ8.2B-FL	D9	8.02	8.36	5	30	75	1.0	0.63	5.0
UDZ9.1B-FL	DA	8.85	9.23	5	30	90	1.0	0.45	6.0
UDZ10B-FL	DB	9.77	10.21	5	20	150	1.0	0.18	7.0
UDZ11B-FL	DC	10.76	11.22	5	20	150	1.0	0.09	8.0
UDZ12B-FL	DE	11.74	12.24	5	20	150	1.0	0.09	8.0
UDZ13B-FL	DF	12.91	13.49	5	40	160	1.0	0.09	8.0
UDZ15B-FL	DG	14.34	14.98	5	40	190	1.0	0.045	10.5
UDZ16B-FL	DH	15.85	16.51	5	40	190	1.0	0.045	11.2
UDZ18B-FL	DJ	17.56	18.35	5	50	220	1.0	0.045	12.6
UDZ20B-FL	DK	19.52	20.39	5	60	220	1.0	0.045	14.0
UDZ22B-FL	DL	21.54	22.47	5	80	240	1.0	0.045	15.4
UDZ24B-FL	DM	23.72	24.78	5	80	240	1.0	0.045	16.8
UDZ27B-FL	DN	26.19	27.53	5	100	300	0.5	0.045	18.9
UDZ30B-FL	DP	29.19	30.69	5	100	300	0.5	0.045	21.0
UDZ33B-FL	DR	32.15	33.79	5	100	310	0.5	0.045	23.0
UDZ36B-FL	DS	35.07	36.87	5	100	330	0.5	0.045	25.2

Notes 1: The zener voltage (V_Z) is tested under pulse condition of 10ms.2: The zener impedance is derived from the 60-cycle ac voltage, which results when an ac current having an rms value equal to 10% of the dc zener current (I_{ZT} or I_{ZK}) is superimposed to I_{ZT} or I_{ZK} .

Rating and characteristic curves (UDZ2.4B-FL THRU UDZ36B-FL)

FIG.1-ZENER VOLTAGE CHARACTERISTICS


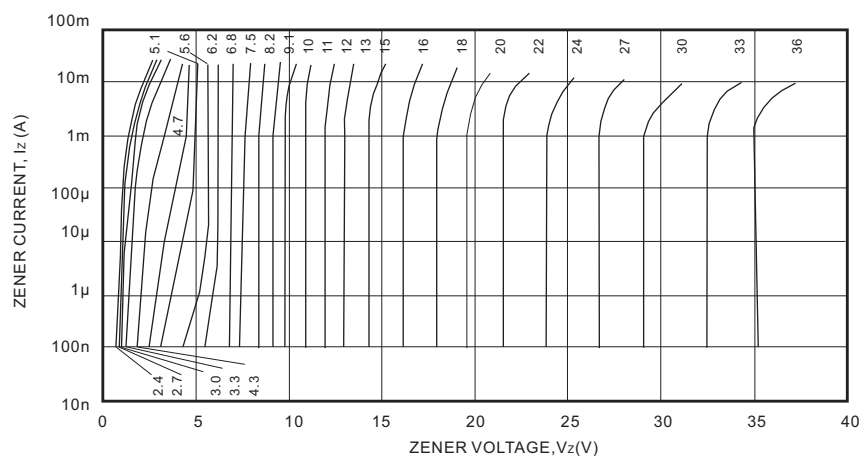


FIG. 2-DRATING CURVE

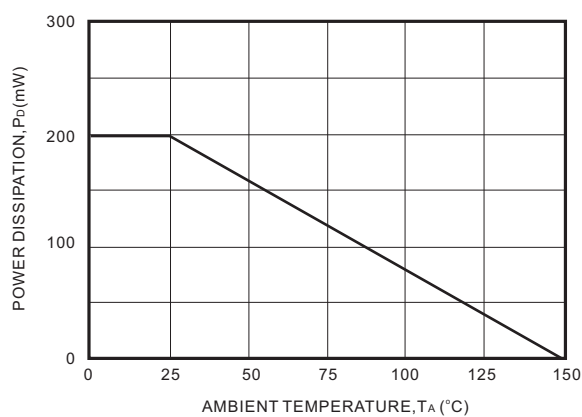


UDZ2.4B-FL THRU UDZ36B-FL

Pinning information

Pin	Simplified outline	Symbol
Pin1 cathode Pin2 anode		

Suggested solder pad layout

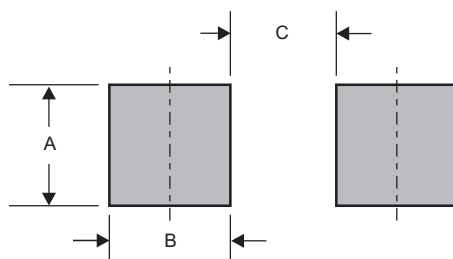


Dimensions in inches and (millimeters)

PACKAGE	A	B	C
SOD-323FL	0.032 (0.82)	0.022 (0.56)	0.069 (1.75)

UDZ2.4B-FL THRU UDZ36B-FL

Packing information

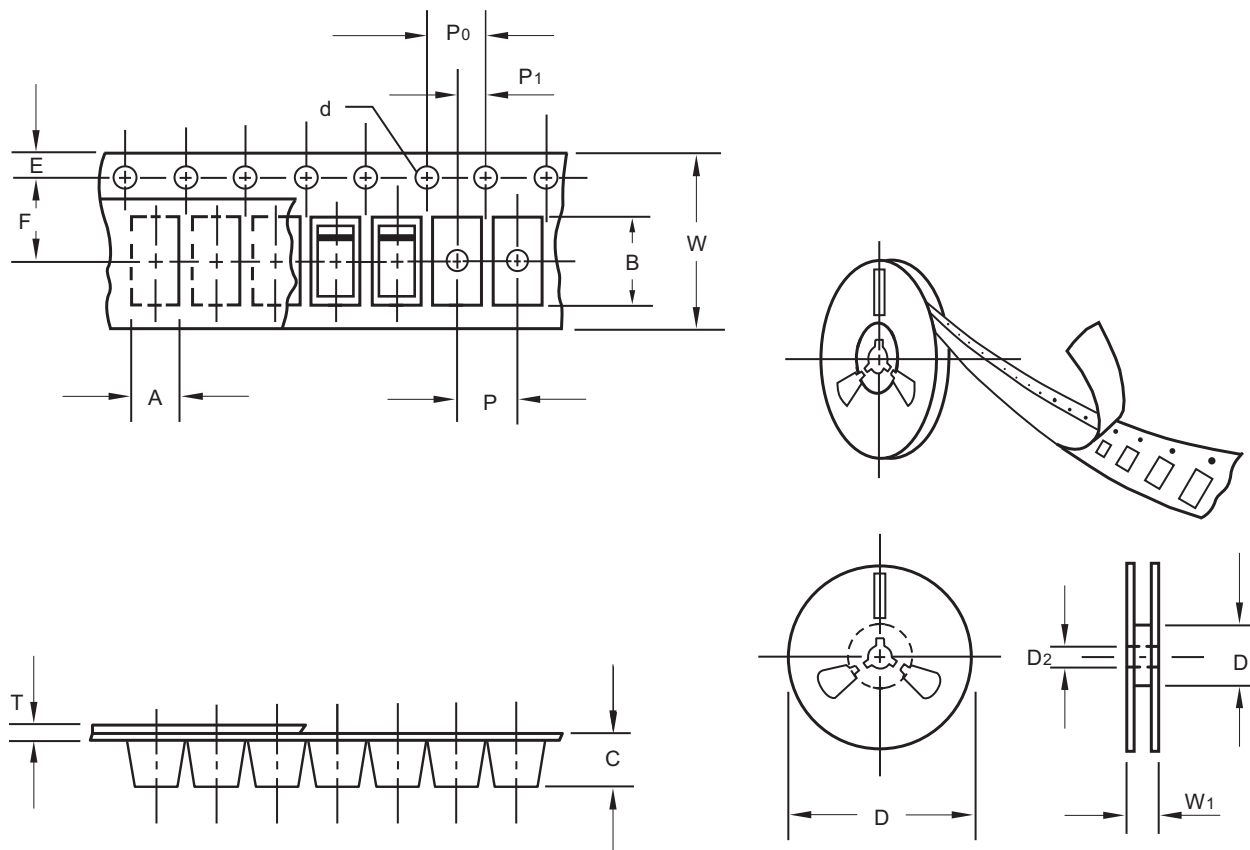

unit:mm

Item	Symbol	Tolerance	SOD-323FL
Carrier width	A	0.1	1.46
Carrier length	B	0.1	2.95
Carrier depth	C	0.1	1.25
Sprocket hole	d	0.1	1.50
13" Reel outside diameter	D	2.0	-
13" Reel inner diameter	D1	min	-
7" Reel outside diameter	D	2.0	178.00
7" Reel inner diameter	D1	min	62.00
Feed hole diameter	D2	0.5	13.00
Sprocket hole position	E	0.1	1.75
Punch hole position	F	0.1	3.50
Punch hole pitch	P	0.1	4.00
Sprocket hole pitch	P0	0.1	4.00
Embossment center	P1	0.1	2.00
Overall tape thickness	T	0.1	0.23
Tape width	W	0.3	8.00
Reel width	W1	1.0	11.40

Note: Devices are packed in accordance with EIA standard RS-481-A and specifications listed above.


UDZ2.4B-FL THRU UDZ36B-FL

Reel packing

PACKAGE	REEL SIZE	REEL (pcs)	COMPONENT SPACING (m/m)	BOX (pcs)	INNER BOX (m/m)	REEL DIA, (m/m)	CARTON SIZE (m/m)	CARTON (pcs)	APPROX. GROSS WEIGHT (kg)
SOD-323FL	7"	3,000	4.0	30,000	183*123*183	178	382*257*387	240,000	9.5

Suggested thermal profiles for soldering processes

- 1.Storage environment: Temperature=5°C~40°C Humidity=55%±25%
- 2.Reflow soldering of surface-mount devices

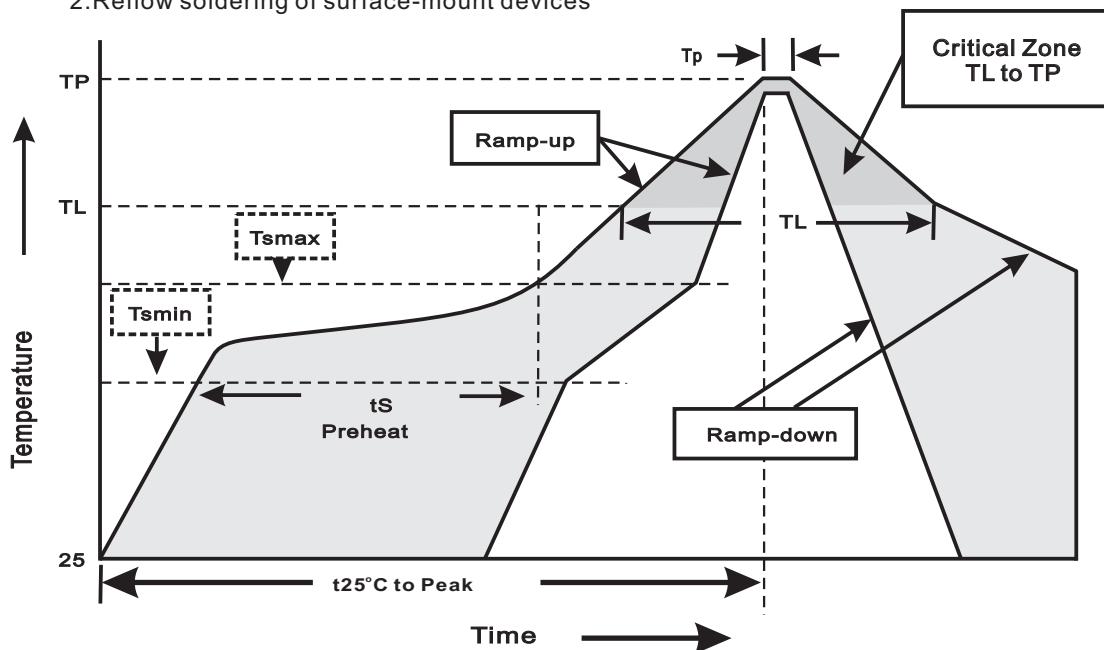

3.Reflow soldering

Profile Feature	Soldering Condition
Average ramp-up rate(T_L to T_P)	$<3^{\circ}\text{C}/\text{sec}$
Preheat -Temperature Min(T_{smin}) -Temperature Max(T_{smax}) -Time(min to max)(t_s)	150°C 200°C 60~120sec
T_{smax} to T_L -Ramp-upRate	$<3^{\circ}\text{C}/\text{sec}$
Time maintained above: -Temperature(T_L) -Time(t_L)	217°C 60~260sec
Peak Temperature(T_P)	255°C-0/+5°C
Time within 5°C of actual Peak Temperature(t_P)	10~30sec
Ramp-down Rate	$<6^{\circ}\text{C}/\text{sec}$
Time 25°C to Peak Temperature	$<6\text{minutes}$

UDZ2.4B-FL THRU UDZ36B-FL

High reliability test capabilities

Item Test	Conditions	Reference
1. Solder Resistance	at $260 \pm 5^{\circ}\text{C}$ for $10 \pm 2\text{sec.}$	MIL-STD-750D METHOD-2031
2. Solderability	at $245 \pm 5^{\circ}\text{C}$ for 5 sec.	MIL-STD-202F METHOD-208
3. High Temperature Reverse Bias	$V_Z = V_{Z \text{ Nom}} * 80\%$ at $T_J = 150^{\circ}\text{C}$ for 168 hrs.	MIL-STD-750D METHOD-1038
4. Pressure Cooker	$15P_{\text{SIG}}$ at $T_A = 121^{\circ}\text{C}$ for 4 hrs.	JESD22-A102
5. Temperature Cycling	-55°C to $+125^{\circ}\text{C}$ dwelled for 30 min. and transferred for 5min. total 10 cycles.	MIL-STD-750D METHOD-1051
6. Humidity	at $T_A = 85^{\circ}\text{C}$, RH=85% for 1000hrs.	MIL-STD-750D METHOD-1021
7. High Temperature Storage Life	at 175°C for 1000 hrs.	MIL-STD-750D METHOD-1031