



DESCRIPTION

The UDZS2.0B~ UDZS36B are available in SOD-323 Package

FEATURES

- Non-wire bonding structure improves
- High demand voltage range (3.6V-36V)
- Silicon epitaxial planar
- RoHS Compliant
- Available in SOD-323 Package

ORDERING INFORMATION

Package Type	Part Number
SOD-323	UDZS2.0B
	UDZS2.2B
	UDZS2.4B
	UDZS2.7B
	UDZS3.0B
	UDZS3.3B
	UDZS3.6B
	UDZS3.9B
	UDZS4.3B
	UDZS4.7B
	UDZS5.1B
	UDZS5.6B
	UDZS6.2B
	UDZS6.8B
	UDZS7.5B
	UDZS8.2B
	UDZS9.1B
	UDZS10B
	UDZS11B
	UDZS12B
	UDZS13B
	UDZS15B
	UDZS16B
	UDZS18B
	UDZS20B
	UDZS22B
	UDZS24B
	UDZS27B
	UDZS30B
	UDZS33B
	UDZS36B
Note	3,000pcs/ Reel
AiT provides all RoHS Compliant Products	

PIN DESCRIPTION





ABSOLUTE MAXIMUM RATINGS

T_A=25°C

P _D , Power Dissipation	200mW
T _J , Junction Temperature	125°C
T _{STG} , Storage Temperature	-55°C to +150°C
T _{OPR} , Operating Temperature	-55°C to +150°C

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



ELECTRICAL CHARACTERISTICS

T_A=25°C

Part Number	Zener voltage			Operating resistance		Rising operating resistance		Reverse current	
	V _Z (V)			Z _Z (Ω)		Z _{ZK} (Ω)		I _R (μA)	
	Min	Max	I _Z (mA)	Max	I _Z (mA)	Max	I _Z (mA)	Max	V _R (V)
UDZS2.0B	2.020	2.200	5	100	5	1000	0.5	120	0.5
UDZS2.2B	2.220	2.410	5	100	5	1000	0.5	120	0.7
UDZS2.4B	2.430	2.630	5	100	5	1000	0.5	100	1.0
UDZS2.7B	2.690	2.910	5	110	5	1000	0.5	100	1.0
UDZS3.0B	3.010	3.220	5	120	5	1000	0.5	50	1.0
UDZS3.3B	3.320	3.530	5	120	5	1000	0.5	20	1.0
UDZS3.6B	3.600	3.845	5	100	5	1000	1.0	10	1.0
UDZS3.9B	3.890	4.160	5	100	5	1000	1.0	5	1.0
UDZS4.3B	4.170	4.430	5	100	5	1000	1.0	5	1.0
UDZS4.7B	4.550	4.750	5	100	5	800	0.5	2	1.0
UDZS5.1B	4.980	5.200	5	80	5	500	0.5	2	1.5
UDZS5.6B	5.490	5.730	5	60	5	200	0.5	1	2.5
UDZS6.2B	6.060	6.330	5	60	5	100	0.5	1	3.0
UDZS6.8B	6.650	6.930	5	40	5	60	0.5	0.5	3.5
UDZS7.5B	7.280	7.600	5	30	5	60	0.5	0.5	4.0
UDZS8.2B	8.020	8.360	5	30	5	60	0.5	0.5	5.0
UDZS9.1B	8.850	9.230	5	30	5	60	0.5	0.5	6.0
UDZS10B	9.770	10.210	5	30	5	60	0.5	0.1	7.0
UDZS11B	10.760	11.220	5	30	5	60	0.5	0.1	8.0
UDZS12B	11.740	12.240	5	30	5	80	0.5	0.1	9.0
UDZS13B	12.910	13.490	5	37	5	80	0.5	0.1	10.0
UDZS15B	14.340	14.980	5	42	5	80	0.5	0.1	11.0
UDZS16B	15.850	16.510	5	50	5	80	0.5	0.1	12.0
UDZS18B	17.560	18.350	5	65	5	80	0.5	0.1	13.0
UDZS20B	19.520	20.390	5	85	5	100	0.5	0.1	15.0
UDZS22B	21.540	22.470	5	100	5	100	0.5	0.1	17.0
UDZS24B	23.720	24.780	5	120	5	120	0.5	0.1	19.0
UDZS27B	26.190	27.530	5	150	5	150	0.5	0.1	21.0
UDZS30B	29.190	30.690	5	200	5	200	0.5	0.1	23.0
UDZS33B	32.150	33.790	5	250	5	250	0.5	0.1	25.0
UDZS36B	35.070	36.870	5	300	5	300	0.5	0.1	27.0

NOTE1: The Zener voltage (V_Z) is measured 40ms after power is supplied.


NOTE2: The operating resistances (Z_Z, Z_{ZK}) are measured by superimposing a minute alternating current on the regulated current (I_Z).




TYPICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$


1. Zener voltage characteristics

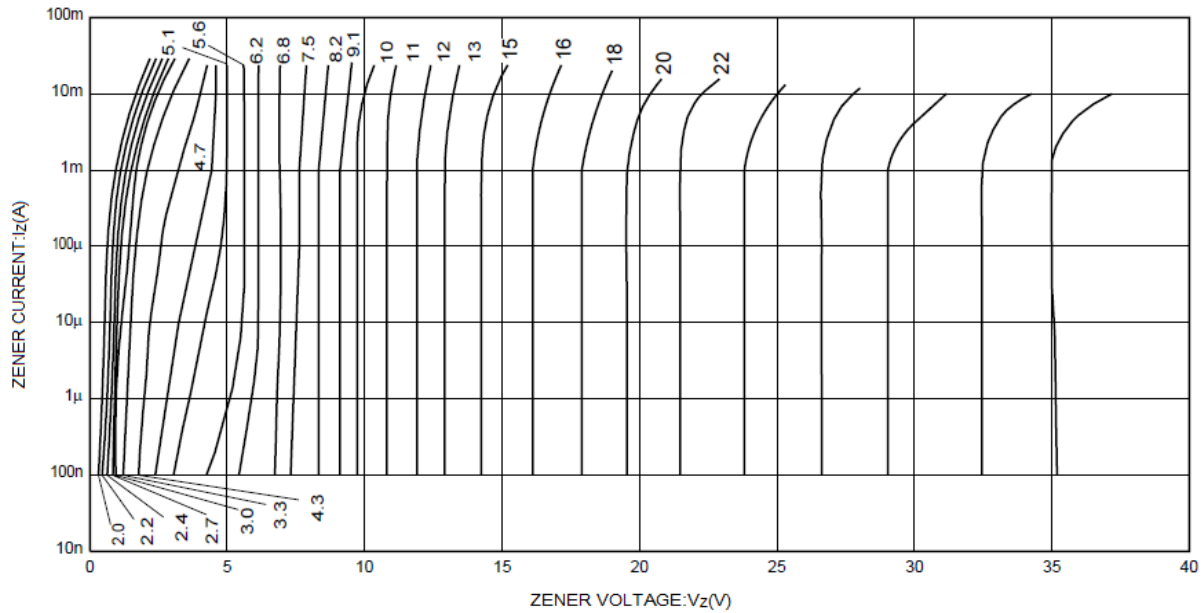

2. Derating curve

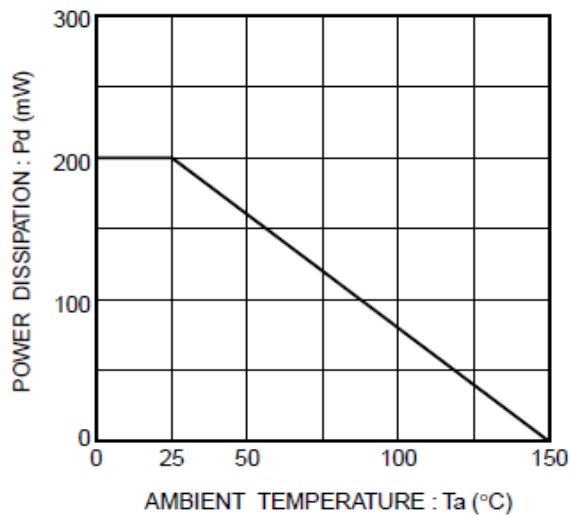


3. Zener voltage-temp. coefficient characteristics

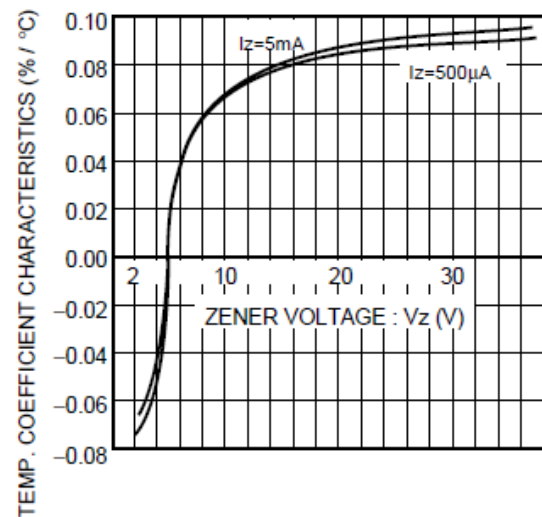



PACKAGE INFORMATION

Dimension in SOD-323 Package (Unit: mm)

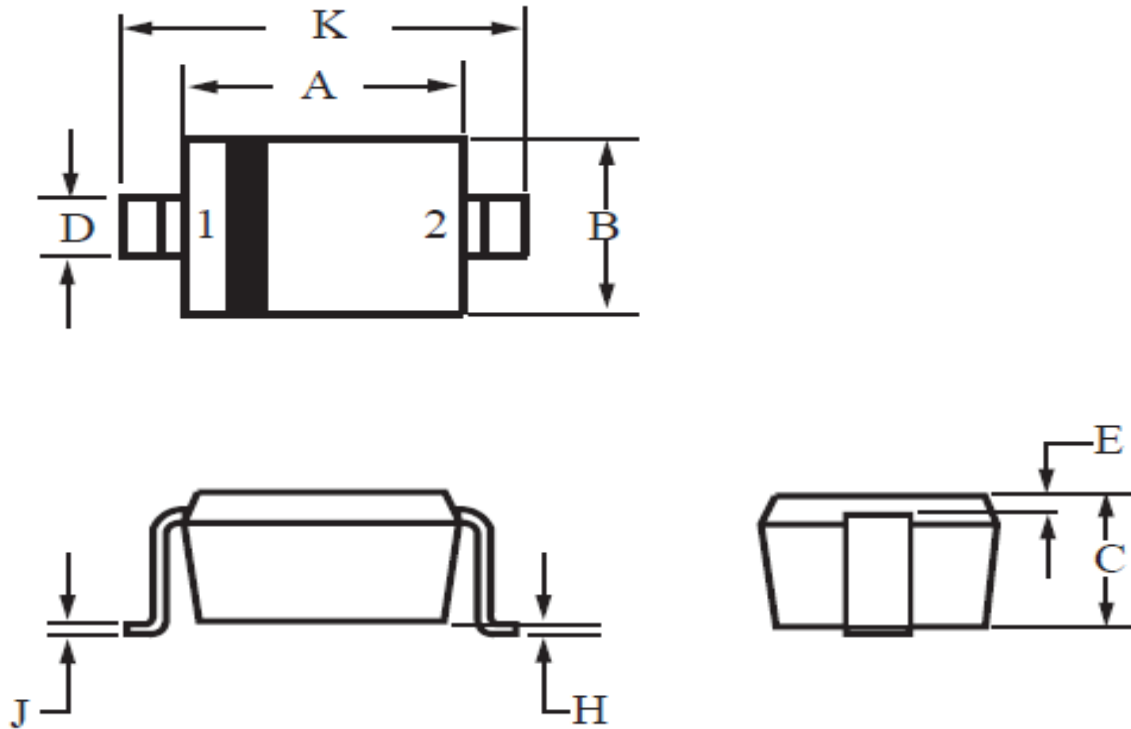

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	1.600	1.800	0.063	0.071
B	1.150	1.350	0.045	0.053
C	0.800	1.000	0.031	0.039
D	0.250	0.400	0.010	0.016
E	0.15 REF		0.006 REF	
H	0.000	0.100	0.000	0.004
J	0.089	0.177	0.0035	0.0070
K	2.300	2.700	0.091	0.106



IMPORTANT NOTICE

AiT Components (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Components' integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Components assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.