

■ Features


- Axial lead type devices for through hole design.
- High current capability.
- Ultrafast recovery time for switching mode application.
- High surge current capability.
- Glass passivated chip junction.
- Suffix "G" indicates Halogen free parts, ex. UF5005G
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

■ Mechanical data

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, DO-201AD / DO-27
- Lead : Axial leads, solderable per MIL-STD-202, Method 208 guaranteed
- Polarity : Color band denotes cathode end
- Weight : Approximated 1.10 gram

■ Outline

DO-27(DO-201AD)

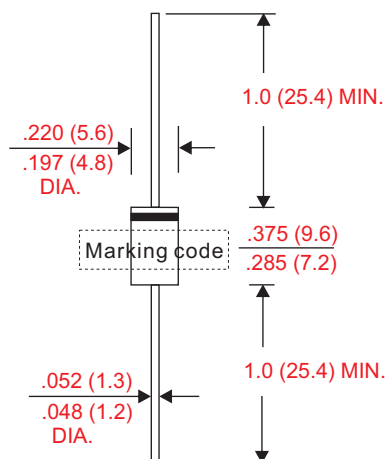

Dimensions in inches and (millimeters)

■ Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter			Conditions		Symbol	MIN.	TYP.	MAX.	UNIT
Forward rectified current					I _O			5.0	A
Forward surge current			8.3ms single half sine-wave superimposed on rate load (JEDEC method)		I _{FSM}			125	A
Reverse current			V _R = V _{RRM} T _A = 25°C	I _R			5.0	uA	
			V _R = V _{RRM} T _A = 125°C				100		
Storage temperature					T _{STG}	-55		+150	°C
Symbol	Marking code	Max. repetitive peak reverse voltage V _{RRM} (V)	Max. RMS voltage V _{RMS} (V)	Max. DC blocking voltage V _R (V)	Max. forward voltage @5A, T _A = 25°C V _F (V)	Max. reverse recovery time(1) T _{rr} (ns)		Operating temperature T _J (°C)	
UF5005	UF5005	50	35	50	1.0	50		-55 ~ +150	
UF501	UF501	100	70	100					
UF502	UF502	200	140	200					
UF504	UF504	400	280	400	1.40	75			
UF506	UF506	600	420	600					
UF508	UF508	800	560	800					
UF510	UF510	1000	700	1000					

Note : 1. $I_F = 0.5A$, $I_R = 1.0A$, $I_{RR} = 0.25A$

Rating and characteristic curves






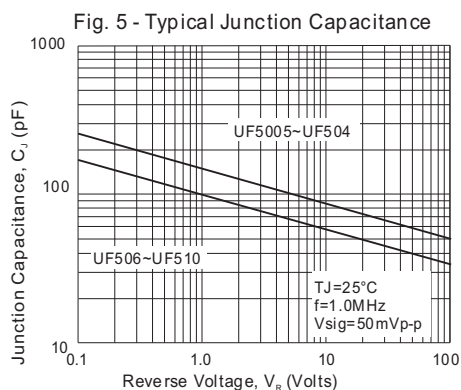


Fig. 6 - Test Circuit Diagram and Reverse Recovery Time Characteristic

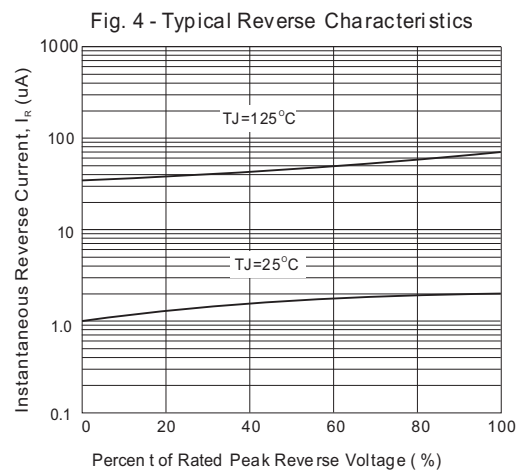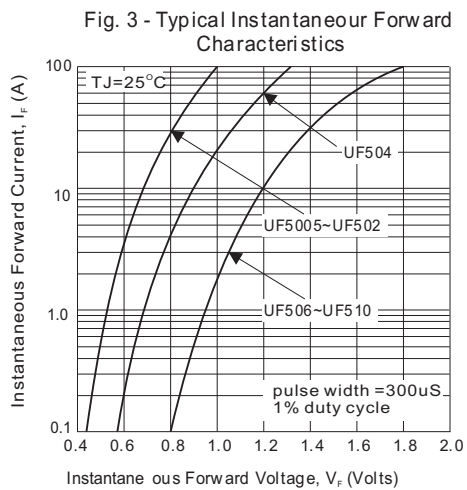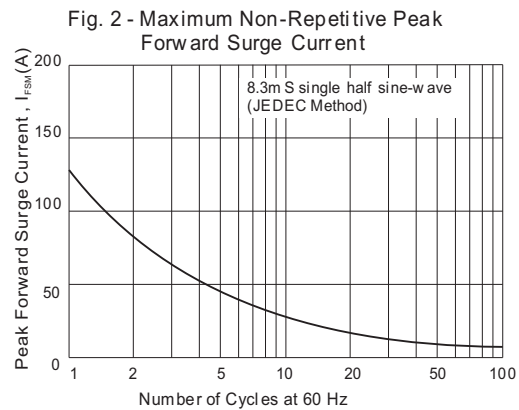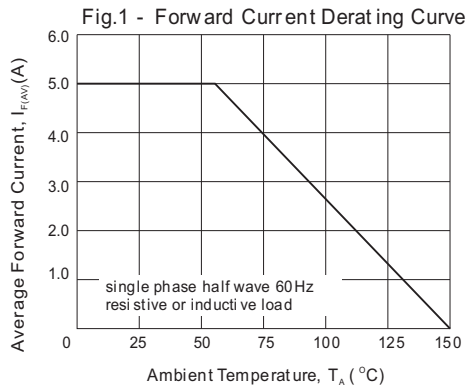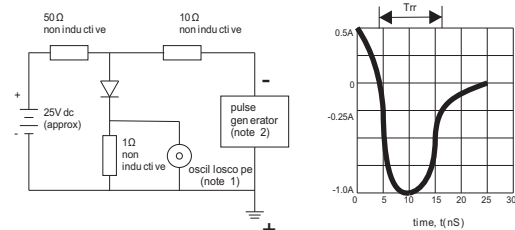

Note: 1. rise time=7nS Max. input impedance=1MΩ, 22pF
2. rise time=10nS Max. source impedance=80Ω

- CITC reserves the right to make changes to this document and its products and specifications at any time without notice.
- Customers should obtain and confirm the latest product information and specifications before final design, purchase or use.
- CITC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does CITC assume any liability for application assistance or customer product design.
- CITC does not warrant or accept any liability with products which are purchased or used for any unintended or unauthorized application.
- No license is granted by implication or otherwise under any intellectual property rights of CITC.
- CITC products are not authorized for use as critical components in life support devices or systems without express written approval of CITC.