

CMOS MMIC 4 x 2 IF SWITCH MATRIX

FEATURES

- 4 independent IF channels, integral switching to channel input to either channel output
- Integrated 4 bit decoder
- Frequency range : $f = 250$ to $2\,150$ MHz
- High isolation D/U ratio : $ISL = 29$ dB TYP.
- Insertion loss : $L_{INS} = 6.7$ dB TYP. @ $Z_0 = 50\ \Omega$
- Insertion loss flatness : $\Delta L_{INS} = 0.7$ dB TYP.
- Control voltage : $V_{CONT} = 0\text{ V}/+5.0\text{ V}$
- 16-pin plastic HTSSOP package

APPLICATIONS

- DBS IF switching
- Switch box
- 4×2 switching application for microwave signal

ORDERING INFORMATION

Part Number	Order Number	Package	Marking	Supplying Form
μ PD5716GR-E1	μ PD5716GR-E1-A	16-pin plastic HTSSOP (Pb-Free)	D5716	<ul style="list-style-type: none">• Embossed tape 12 mm wide• Pin 8, 9 face the perforation side of the tape• Qty 3 kpcs/reel

Remark To order evaluation samples, contact your nearby sales office.

Part number for sample order: μ PD5716GR

Caution Observe precautions when handling because these devices are sensitive to electrostatic discharge.

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.
Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.

ABSOLUTE MAXIMUM RATINGS ($T_A = +25^\circ\text{C}$, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Supply Voltage	V_{DD}	+6.0	V
Switch Control Voltage 1 to 4	$V_{CONT1\text{ to }4}$	+6.0	V
Total Power Dissipation	P_{tot}	2 ^{Note}	W
Input Power	P_{in}	+15	dBm
Operating Ambient Temperature	T_A	-40 to +85	$^\circ\text{C}$
Storage Temperature	T_{stg}	-65 to +150	$^\circ\text{C}$

Note Mounted on double-sided copper-clad $50 \times 50 \times 1.6$ mm epoxy glass PWB, $T_A = +85^\circ\text{C}$

RECOMMENDED OPERATING CONDITIONS ($T_A = +25^\circ\text{C}$)

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Supply Voltage	V_{DD}	+4.0	+5.0	+5.5	V
Control Voltage (H) ^{Note}	$V_{CONT(H)}$	+4.0	+5.0	+5.5	V
Control Voltage (L)	$V_{CONT(L)}$	-0.2	0	+0.4	V

Note $V_{DD} - 0.4\text{ V} \leq V_{CONT(H)} \leq V_{DD} + 0.2\text{ V}$


ELECTRICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, $V_{DD} = +5.0\text{ V}$, $V_{CONT} = 0\text{ V}/+5.0\text{ V}$, $P_{in} = 0\text{ dBm}$, $Z_o = 50\ \Omega$, each port, unless otherwise specified)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Insertion Loss	L_{INS}	$f = 0.25$ to 2.15 GHz	—	6.7	9.0	dB
Insertion Loss Flatness	ΔL_{INS}	$ L_{INS}(0.95\text{ GHz}) - L_{INS}(2.15\text{ GHz}) $	—	0.7	3.0	dB
Isolation D/U-ratio1 ^{Note 1}	ISL1	$f = 0.25$ to 0.95 GHz	28	35	—	dB
Isolation D/U-ratio2 ^{Note 1}	ISL2	$f = 0.95$ to 2.15 GHz	25	29	—	dB
Output Return Loss	RL_{out}	$f = 0.25$ to 2.15 GHz	10	13	—	dB
Control Current ^{Note 2}	I_{CONT}	$V_{DD} = +5.0\text{ V}$, $V_{CONT} = +5.0\text{ V}/0\text{ V}$, non-RF	—	50	100	μA
Supply Current	I_{DD}	$V_{DD} = +5.0\text{ V}$, $V_{CONT} = +5.0\text{ V}/0\text{ V}$, non-RF	—	50	100	μA

Notes 1. Isolation Desire Un-desire (D/U)-ratio = $|(Signal\ leakage\ (off-state)) - (Insertion\ loss\ (on-state))|$

2. Per 1 control pin

PIN CONNECTIONS



Pin No.	Pin Name	Pin No.	Pin Name
1	IN-C	16	IN-B
2	GND	15	GND
3	IN-D	14	IN-A
4	GND	13	GND
5	GND	12	V _{DD}
6	OUT2	11	OUT1
7	V _{CONT3}	10	V _{CONT1}
8	V _{CONT4}	9	V _{CONT2}


Remark Back side. : GND

TRUTH TABLE

State		Output Signal		Control Pins			
No.	Mode	OUT1	OUT2	V _{CONT1}	V _{CONT2}	V _{CONT3}	V _{CONT4}
1	AA	IN-A	IN-A	Low	Low	Low	Low
2	AB		IN-B	Low	Low	Low	High
3	AC		IN-C	Low	Low	High	Low
4	AD		IN-D	Low	Low	High	High
5	BA	IN-B	IN-A	Low	High	Low	Low
6	BB		IN-B	Low	High	Low	High
7	BC		IN-C	Low	High	High	Low
8	BD		IN-D	Low	High	High	High
9	CA	IN-C	IN-A	High	Low	Low	Low
10	CB		IN-B	High	Low	Low	High
11	CC		IN-C	High	Low	High	Low
12	CD		IN-D	High	Low	High	High
13	DA	IN-D	IN-A	High	High	Low	Low
14	DB		IN-B	High	High	Low	High
15	DC		IN-C	High	High	High	Low
16	DD		IN-D	High	High	High	High


Remark High : +5.0 Vdc, Low : 0 Vdc

FUNCTIONAL DIAGRAM

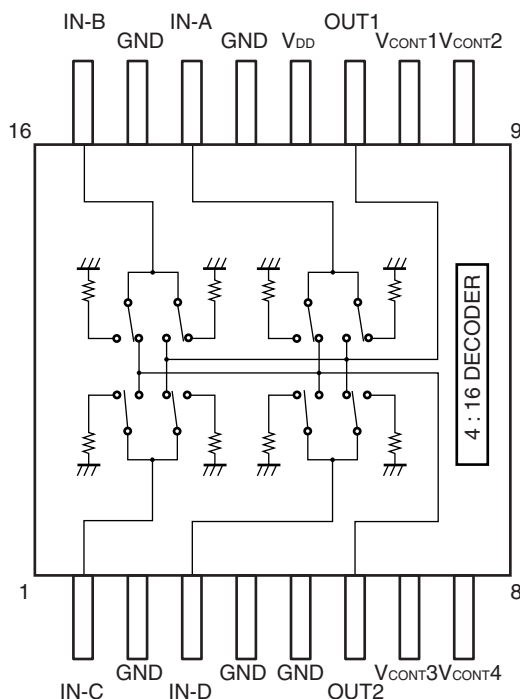

Remark Back Side : GND


EVALUATION CIRCUIT ($V_{DD} = +5.0$ V, V_{CONT1} to $V_{CONT4} = 0$ V/+5.0 V, $P_{in} = 0$ dBm, $Z_o = 50$ Ω , DC Blocking Capacitor = 1 000 pF)

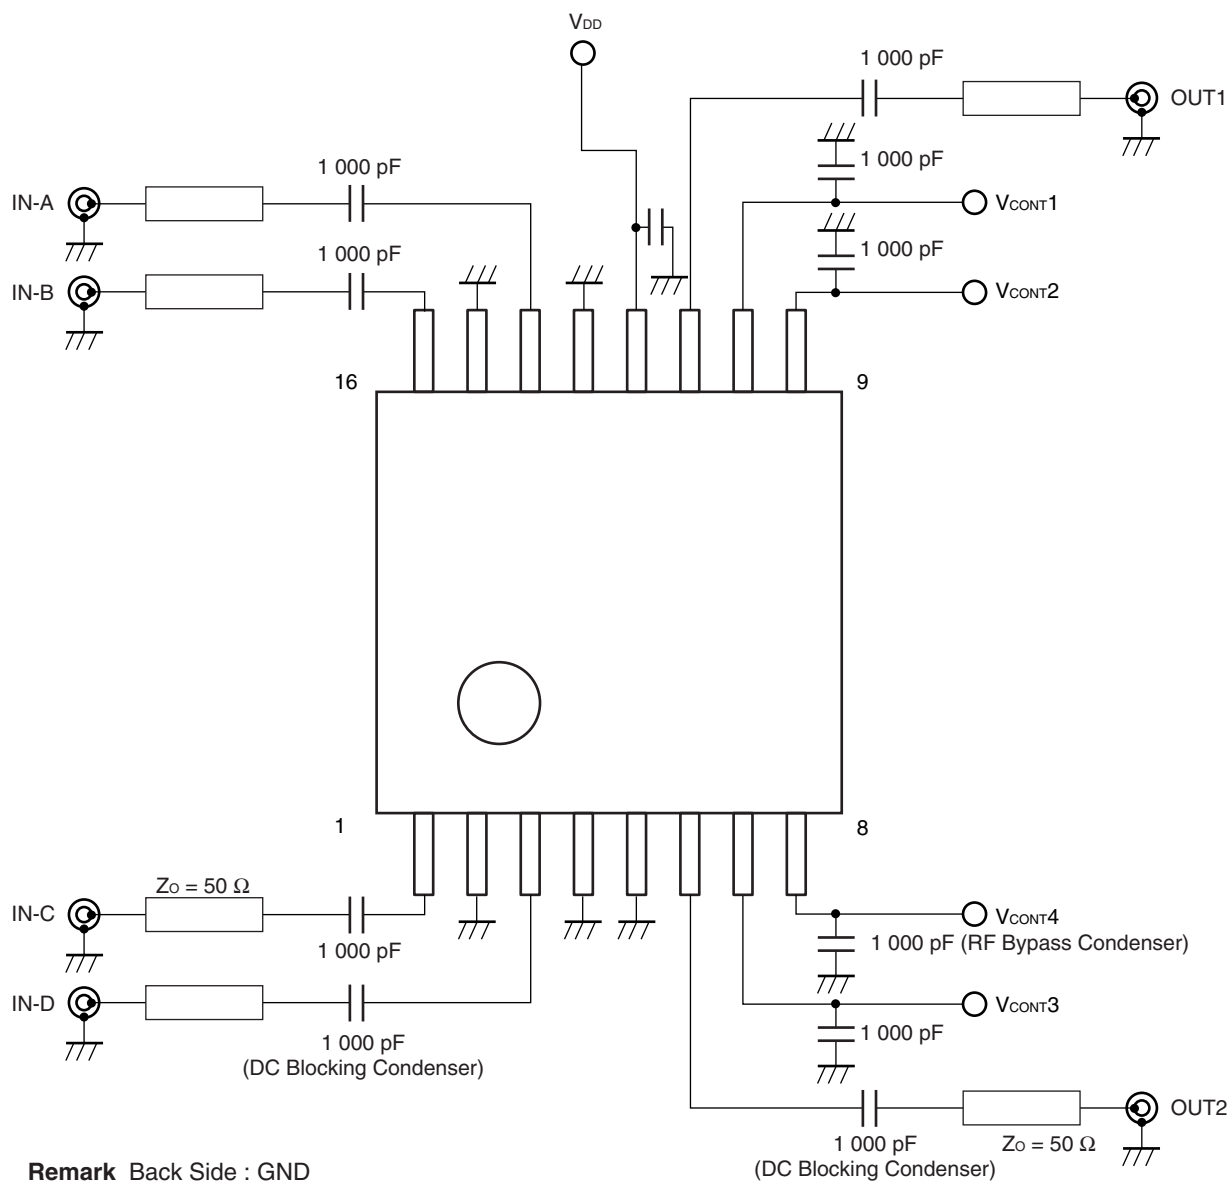


The application circuits and their parameters are for reference only and are not intended for use in actual design-ins.

ILLUSTRATION OF THE TEST CIRCUIT ASSEMBLED ON EVALUATION BOARD

(Top View)

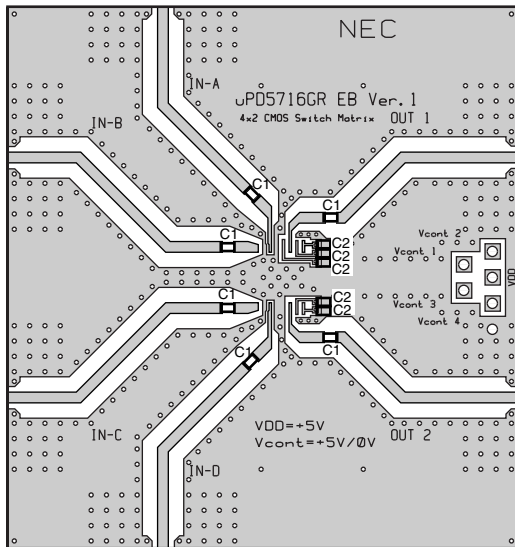

(Bottom View)




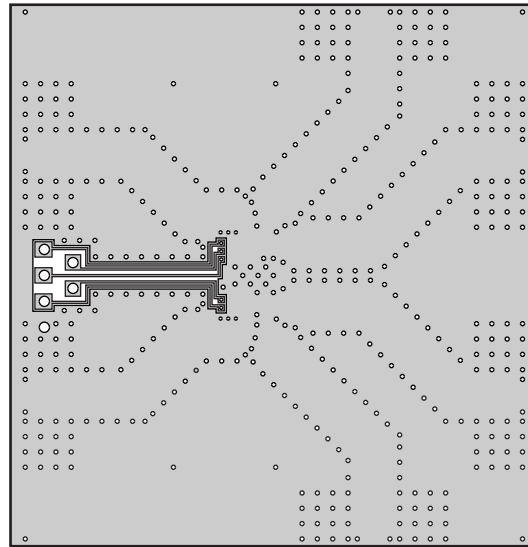


Notes

1. 50 × 53 × 0.51 mm double sided copper clad RO4003 (Rogers) board ($\epsilon_r = 3.38$).
2. Au plated on pattern
3. \circ : Through holes
4. C1, C2: 1 000 pF


TYPICAL CHARACTERISTICS

($T_A = +25^\circ\text{C}$, $V_{DD} = +5.0\text{ V}$, $V_{CONT} = 0\text{ V}/+5.0\text{ V}$, $P_{in} = 0\text{ dBm}$, $Z_o = 50\ \Omega$, unless otherwise specified)

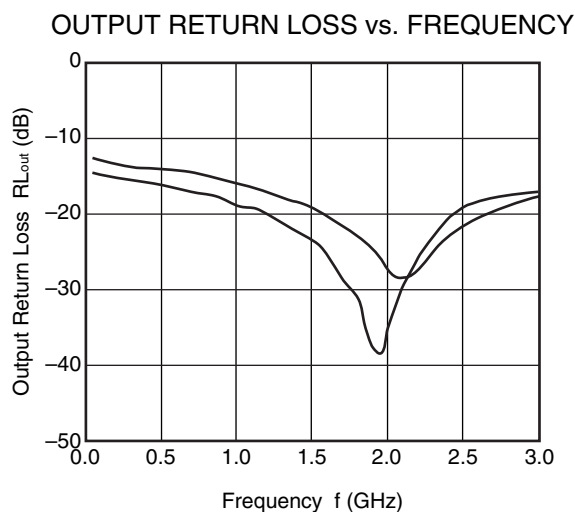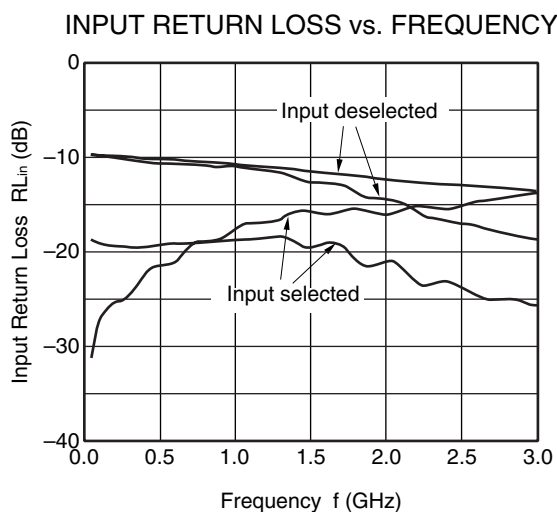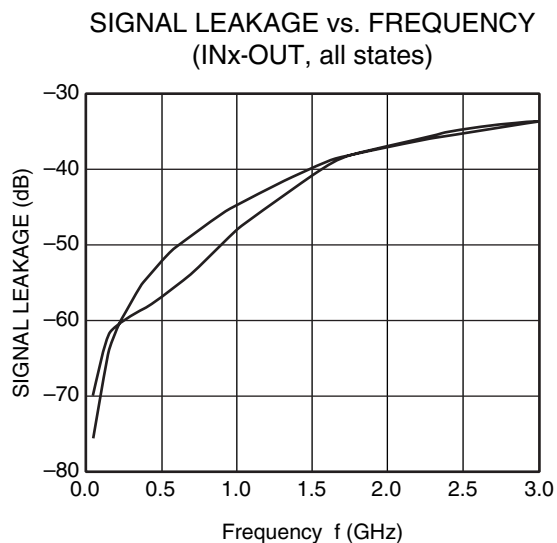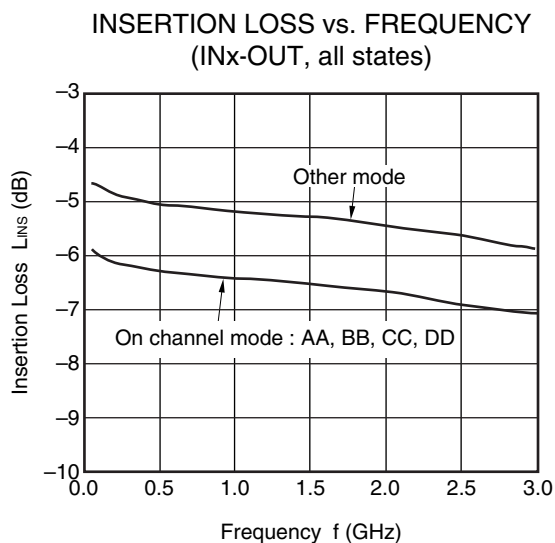


Remark The graphs indicate nominal characteristics.


INSERTION LOSS vs.
ON CHANNEL MODE

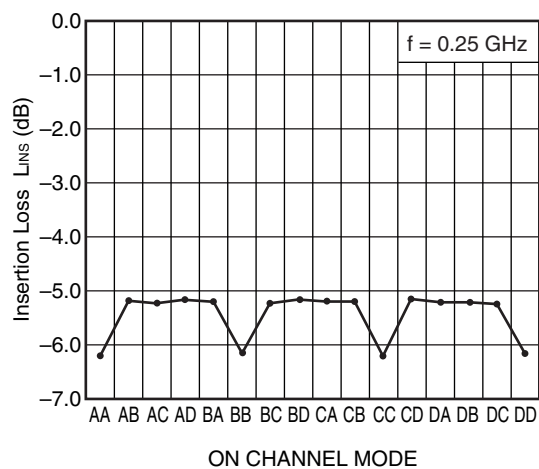


INSERTION LOSS vs.
ON CHANNEL MODE

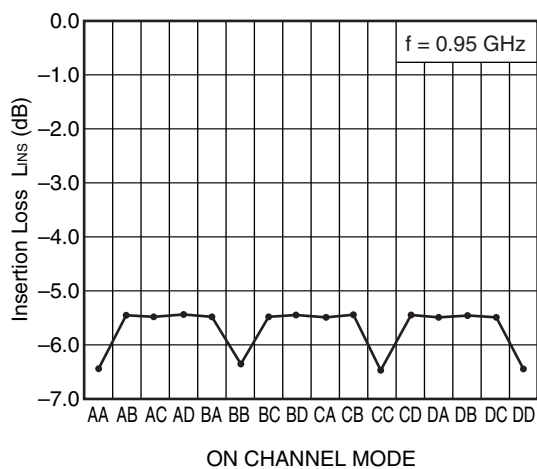

INSERTION LOSS vs.
ON CHANNEL MODE

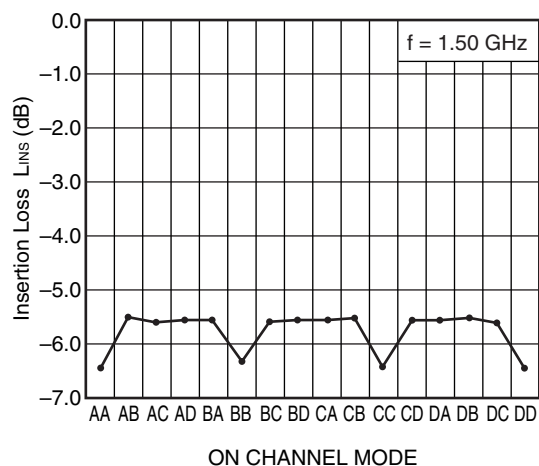


INSERTION LOSS vs.
ON CHANNEL MODE

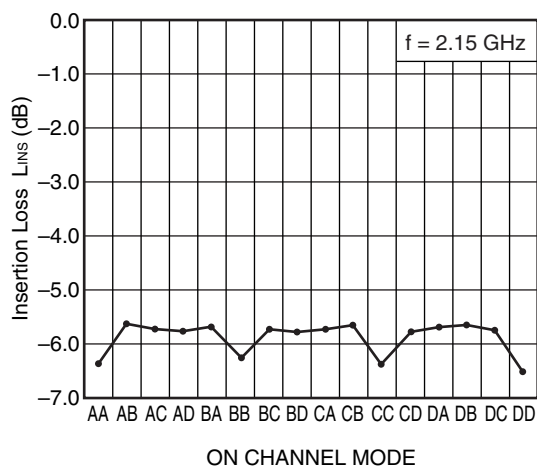


Remark The graphs indicate nominal characteristics.


ISOLATION D/U-RATIO
vs. ON CHANNEL MODE

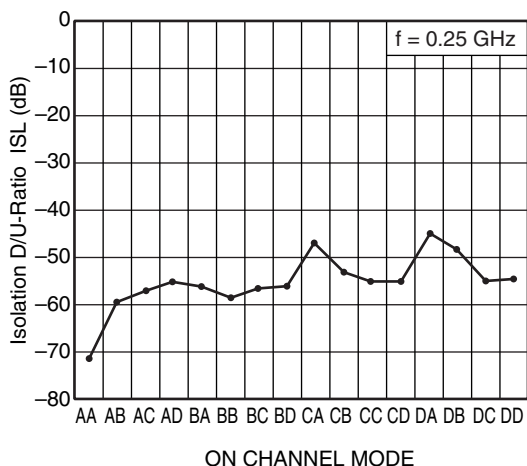


ISOLATION D/U-RATIO
vs. ON CHANNEL MODE

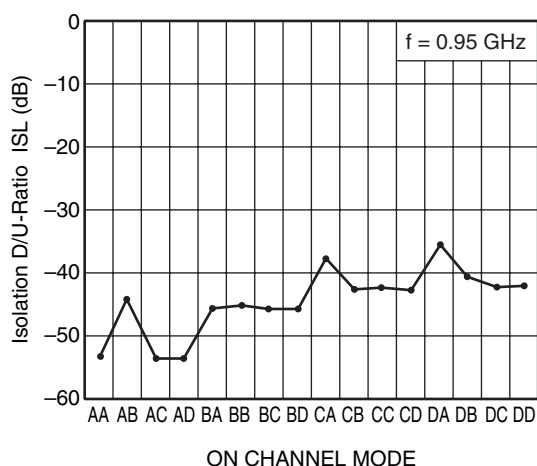

ISOLATION D/U-RATIO
vs. ON CHANNEL MODE

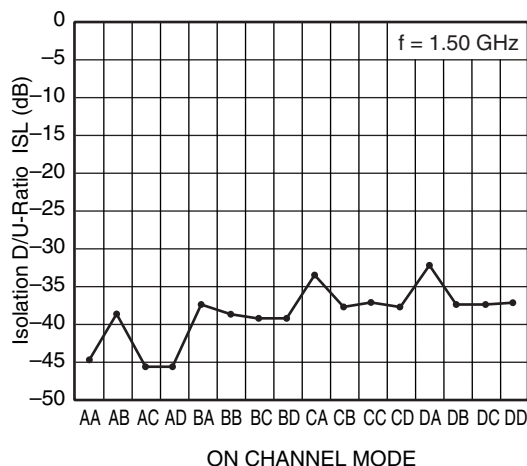


ISOLATION D/U-RATIO
vs. ON CHANNEL MODE

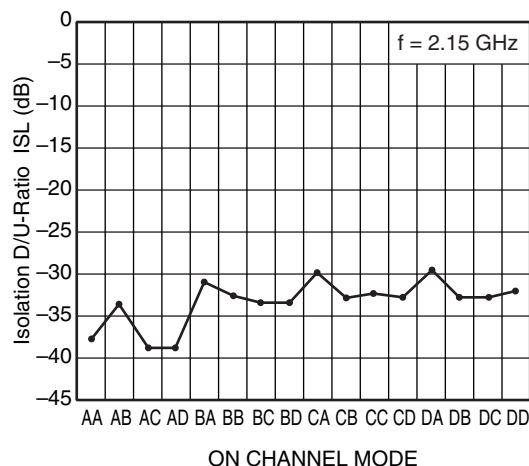


Remark The graphs indicate nominal characteristics.


OUTPUT RETURN LOSS
vs. ON CHANNEL MODE

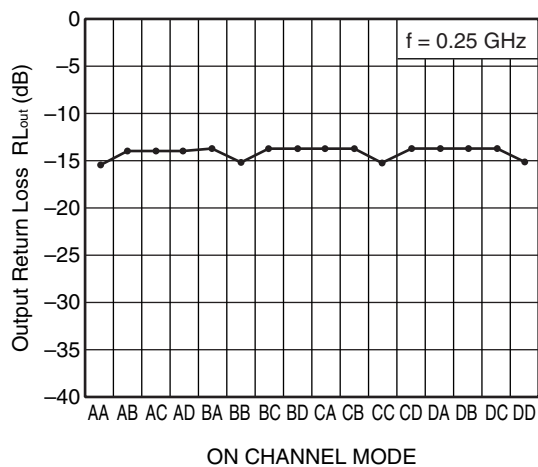


OUTPUT RETURN LOSS
vs. ON CHANNEL MODE

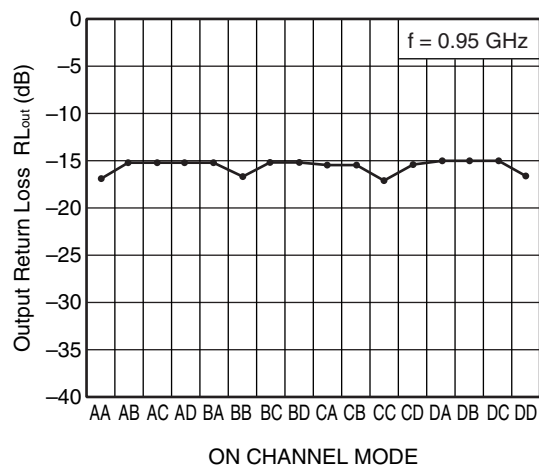

OUTPUT RETURN LOSS
vs. ON CHANNEL MODE

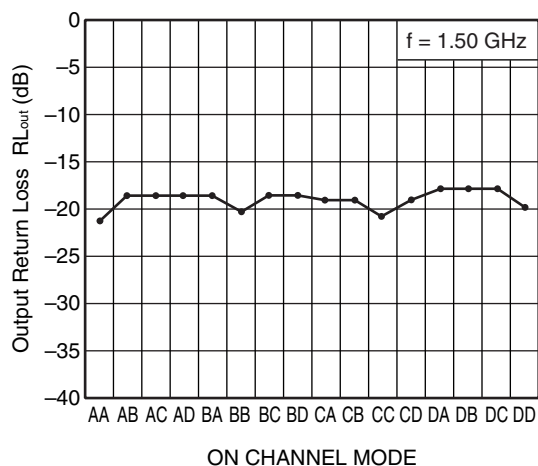


OUTPUT RETURN LOSS
vs. ON CHANNEL MODE

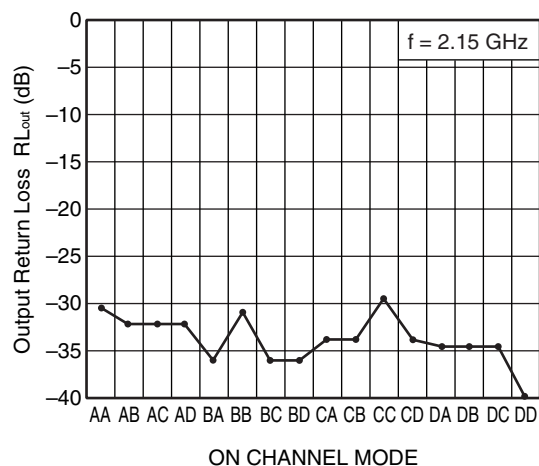

Remark The graphs indicate nominal characteristics.

PACKAGE DIMENSIONS

16-PIN PLASTIC HTSSOP (UNIT: mm)

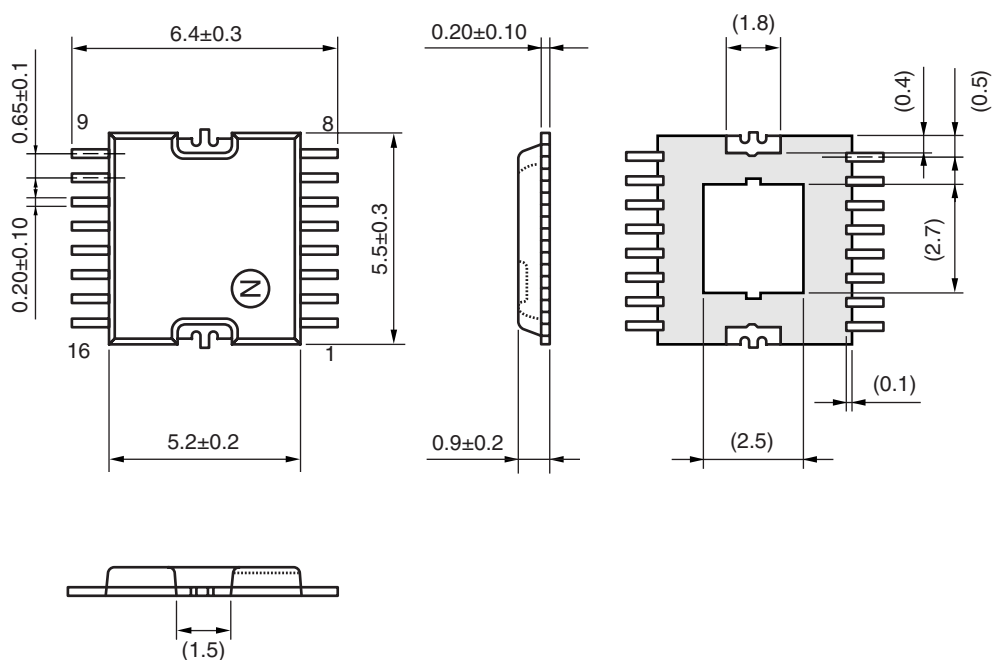

Remark () : Reference value

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

Soldering Method	Soldering Conditions	Condition Symbol
Infrared Reflow	Peak temperature (package surface temperature) : 260°C or below Time at peak temperature : 10 seconds or less Time at temperature of 220°C or higher : 60 seconds or less Preheating time at 120 to 180°C : 120±30 seconds Maximum number of reflow processes : 3 times Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	IR260
Partial Heating	Peak temperature (terminal temperature) : 350°C or below Soldering time (per side of device) : 3 seconds or less Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	HS350

Caution Do not use different soldering methods together (except for partial heating).

- **The information in this document is current as of June, 2006. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.**
- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".

The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

"Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.

"Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).

"Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

(1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.

(2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).

M8E 02.11-1

► For further information, please contact

NEC Compound Semiconductor Devices Hong Kong Limited

E-mail: contact@ncsd-hk.necel.com

Hong Kong Head Office TEL: +852-3107-7303 FAX: +852-3107-7309

Taipei Branch Office TEL: +886-2-8712-0478 FAX: +886-2-2545-3859

Korea Branch Office TEL: +82-2-558-2120 FAX: +82-2-558-5209

www.DataSheet4U.com

NEC Electronics (Europe) GmbH <http://www.eu.necel.com/>

TEL: +49-211-6503-0 FAX: +49-211-6503-1327

California Eastern Laboratories, Inc. <http://www.cel.com/>

TEL: +1-408-988-3500 FAX: +1-408-988-0279

Compound Semiconductor Devices Division

NEC Electronics Corporation

URL: <http://www.ncsd.necel.com/>