

Switchmode Dual Ultrafast Power Rectifiers

-- Designed for use in switching power supplies inverters and as free wheeling diodes. These state-of-the-art devices have the following features:

- * High Surge Capacity
- * Low Power Loss, High efficiency
- * Glass Passivated chip junctions
- * 150 °C Operating Junction Temperature
- * Low Stored Charge Majority Carrier Conduction
- * Low Forward Voltage, High Current Capability
- * High-Switching Speed 50 Nanosecong Recovery Time
- * Plastic Material used Carries Underwriters Laboratory

Flammability Classification 94V-O

* ESD: 4KV(Min.) Human-Body Model



* In compliance with EU RoHs 2002/95/EC directives

**ULTRA FAST
RECTIFIERS**

**6 AMPERES
300-600 VOLTS**




ITO-220AB

MAXIMUM RATINGS


Characteristic	Symbol	URF0630	URF0640	URF0650	URF0660	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	300	400	500	600	V
RMS Reverse Voltage	$V_{R(RMS)}$	210	280	350	420	V
Average Rectifier Forward Current (per iode) Total Device (Rated V_R , $T_C=100$)	$I_{F(AV)}$	3.0 6.0				A
Peak Repetitive Forward Current (Rate V_R , Square Wave, 20kHz)	I_{FM}	6.0				A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfware, single phase, 60Hz)	I_{FSM}	50				A
Operating and Storage Junction Temperature Range	T_J , T_{stg}	-65 to +150				

ELECTRIAL CHARACTERISTICS

Characteristic	Symbol	URF0630	URF0640	URF0650	URF0660	Unit
Maximum Instantaneous Forward Voltage ($I_F=3.0$ Amp $T_C=25$) ($I_F=3.0$ Amp $T_C=125$)	V_F	1.30 1.16		1.50 1.38		V
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C=25$) (Rated DC Voltage, $T_C=125$)	I_R	5.0 200				uA
Reverse Recovery Time ($I_F=0.5$ A, $I_R=1.0$, $I_{rr}=0.25$ A)	T_{rr}	50				ns
Typical Junction Capacitance (Reverse Voltage of 4 volts & f=1 MHz)	C_P	70		60		pF



DIM	MILLIMETERS	
	MIN	MAX
A	15.05	15.15
B	13.35	13.45
C	10.00	10.10
D	6.55	6.65
E	2.65	2.75
F	1.55	1.65
G	1.15	1.25
H	0.55	0.65
I	2.50	2.60
J	3.00	3.20
K	1.10	1.20
L	0.55	0.65
M	4.40	4.60
N	1.15	1.25
O	3.35	3.45
P	2.65	2.75
Q	3.15	3.25



URF0630 Thru URF0660

FIG-1 TYPICAL FORWARD CHARACTERISTICS

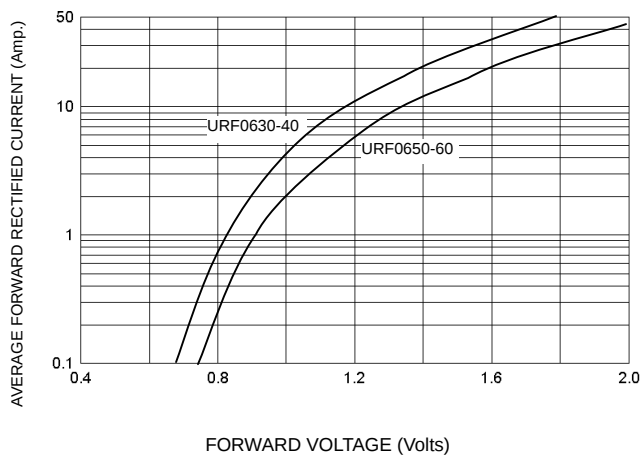


FIG-3 FORWARD CURRENT DERATING CURVE

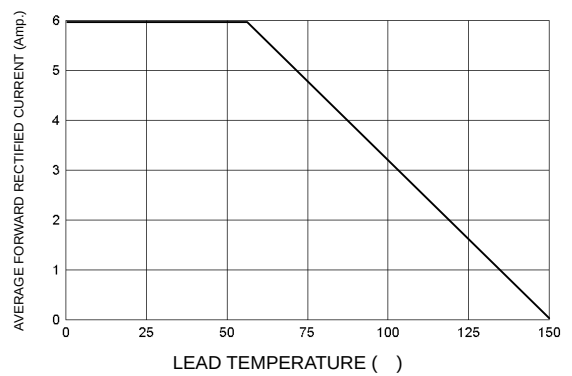


FIG-2 TYPICAL REVERSE CHARACTERISTICS

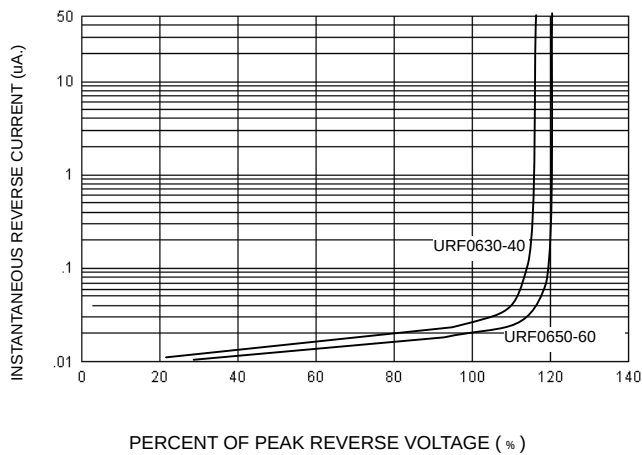


FIG-4 TYPICAL JUNCTION CAPACITANCE




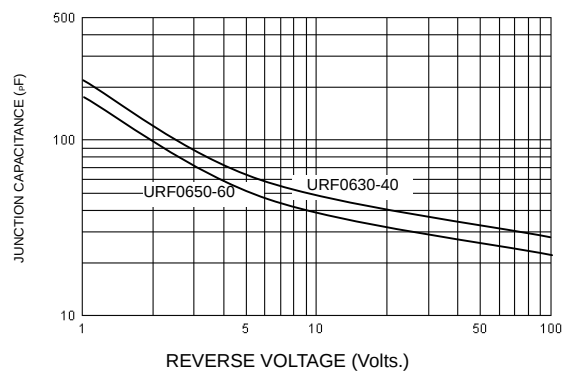


FIG-5 PEAK FORWARD SURGE CURRENT

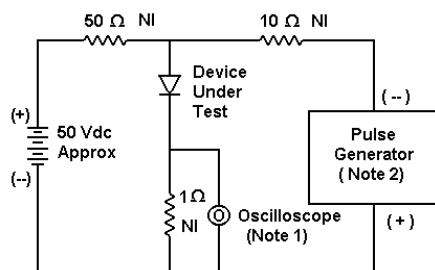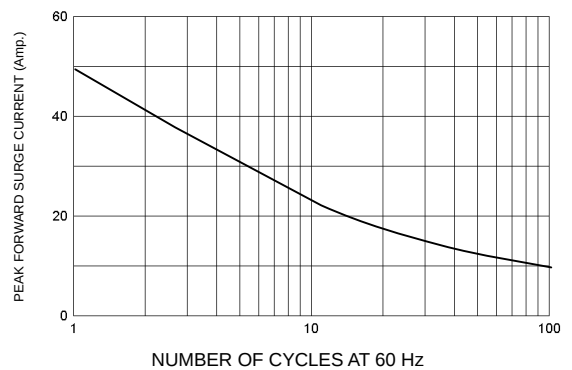

- Notes:
1. Rise Time = 7 ns max. Input Impedance = 1 M Ω, 22 pF
 2. Rise Time = 10 ns max. Input Impedance = 50 Ω

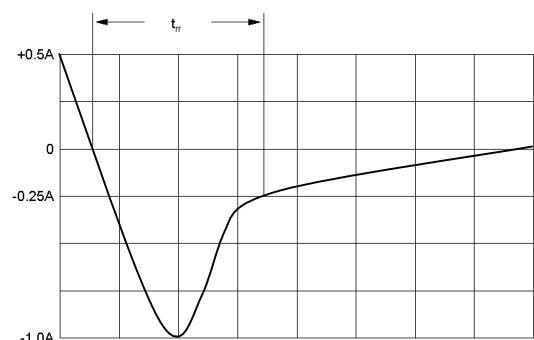

Set time base for 10/20 ns/cm

FIG-6 Reverse Recovery Time Characteristic and Test Circuit Diagram