



YENYO

US1AF THRU US1MF

1.0A Ultra Fast Recovery Rectifier

1. 封裝 Package


- 封裝方式 Method: SMAF
- 封裝尺寸 Dimension: 如圖示

2. 產品特色 Features

- For surface mounted applications in order to optimize board space
- Easy pick and place
- Ultrafast recovery times for high efficiency
- Glass Passivated junction
- Lead-free & halogen-free parts ,ROHS compliant

3. 機械數據 Mechanical Data

- Epoxy: UL94V-0 rated flame retardant
- Case: Molded plastic over passivated junction
- Terminals: Solder plated solderable per MIL-STD-750 Method 2026
- Polarity: Color band denotes cathode end

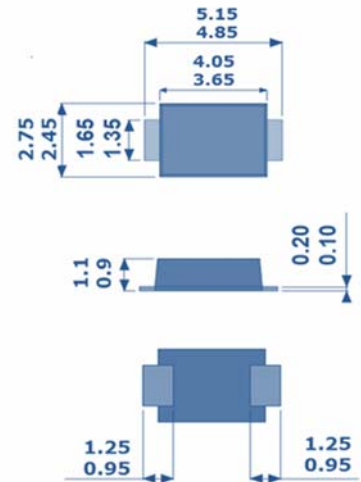

單位 Unit: millimeters

4. 極限值與電參數 Maximum Ratings & Electrical Characteristic

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

PARAMETER	Symbol	US1AF	US1BF	US1DF	US1GF	US1JF	US1KF	US1MF	UNITS
Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	Volts
RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	Volts
DC Blocking Voltage	V _R	50	100	200	400	600	800	1000	Volts
Average Forward Current	I _{F(AV)}	1.0							Amps
Peak Forward Surge Current: 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	30.0							Amps
Forward Voltage at 1.0A	V _F	1			1.4	1.7			Volts
DC Reverse Current at Rated DC Blocking Voltage T _J =25°	I _R	3							uA
Typical Thermal Resistance ,Junction to Lead (NOTE 1) Junction to ambient (NOTE 2)	R _{θJL} R _{θJA}	22 150							°C/W
Reverse recovery time (I _F =0.5A,I _R =1.0A,I _{rr} =0.25A)	T _{rr}	50				75			ns
Operating junction temperature and storage temperature range	T _J ,T _{STG}	-55 to +150							°C

Notes:

- (1) Mounted on an FR4 PCB, single-sided copper, with 10cm x 10cm copper pad area.
- (2) Mounted on an FR4 PCB, single-sided copper, mini pad.



YENYO

US1AF THRU US1MF

1.0A Ultra Fast Recovery Rectifier

5. 特性曲線 Rating & Characteristic Curves

Fig. 1 Forward Current Derating Curve

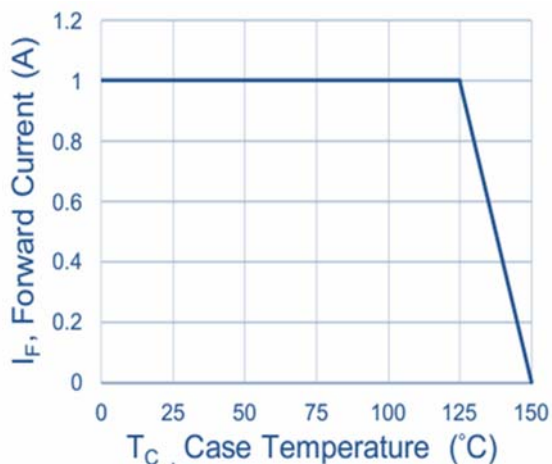


Fig. 2 Typical Reverse Characteristics

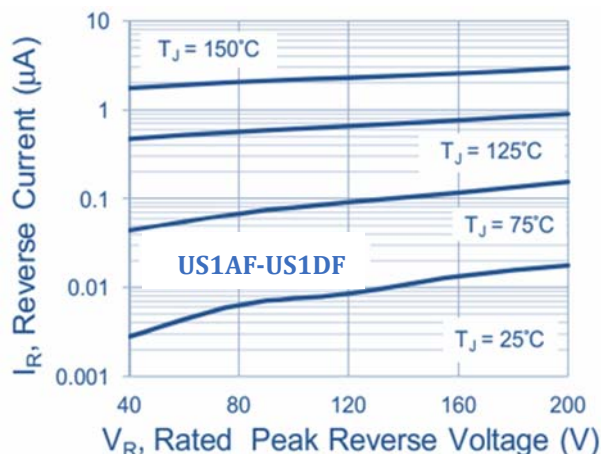


Fig. 3 Typical Reverse Characteristics

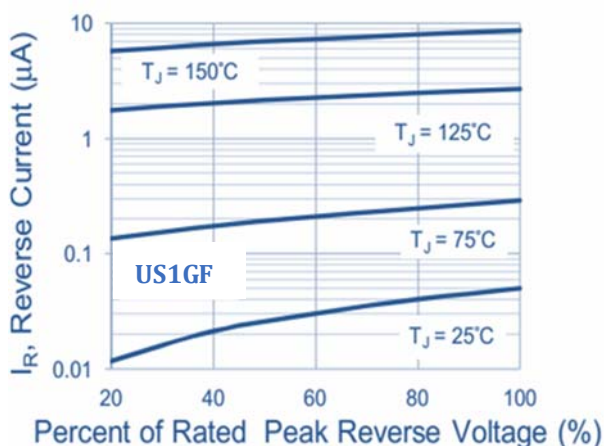


Fig. 4 Typical Reverse Characteristics

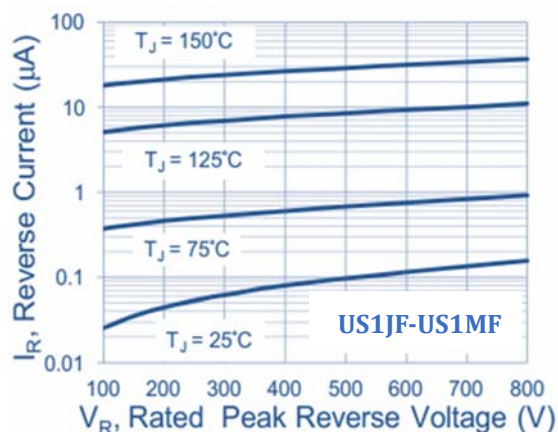


Fig. 5 Typical Forward Characteristics


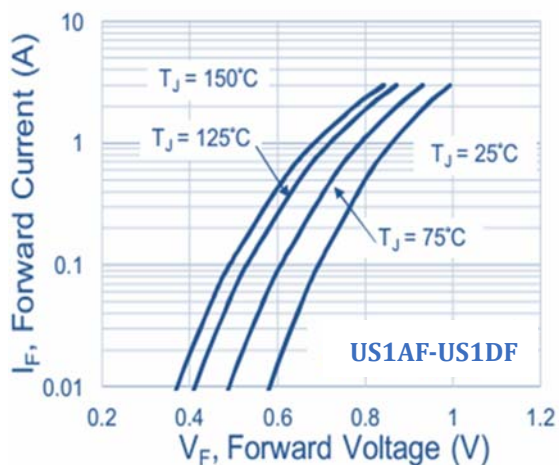


Fig. 6 Forward Current Derating Curve



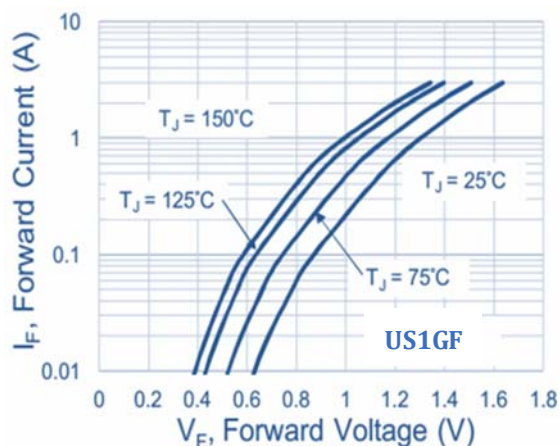

YENYO

US1AF THRU US1MF

1.0A Ultra Fast Recovery Rectifier

Fig. 7 Typical Junction Capacitance

