

USH SERIES

85°C Ultra Miniaturized, Snap-in Terminal Type

◆FEATURES

- Load Life : 85°C 2000 hours.
- Smaller size than USG series.
- RoHS compliance.



◆SPECIFICATIONS

Items	Characteristics		
Category Temperature Range	-25~+85℃		
Rated Voltage Range	400~450V.DC		
Capacitance Tolerance	±20% (20℃, 120Hz)		
Leakage Current(MAX)	I=3√CV (After 5 minutes application of rated voltage) I=(μA)		

◆MULTIPLIER FOR RIPPLE CURRENT

Frequency Coefficient

(Hz) Frequency	60(50)	120	500	1k	10k≤
Coefficient	0.80	1.00	1.20	1.25	1.40

◆OPTION


	Code
PET Sleeve without plate	EFC

◆PART NUMBER

□□□	USH	□□□	M	□□□	SN	D×L
Rated Voltage	Series	Rated Capacitance	Capacitance Tolerance	Option	Terminal Code	Case Size

◆DIMENSIONS

(mm)

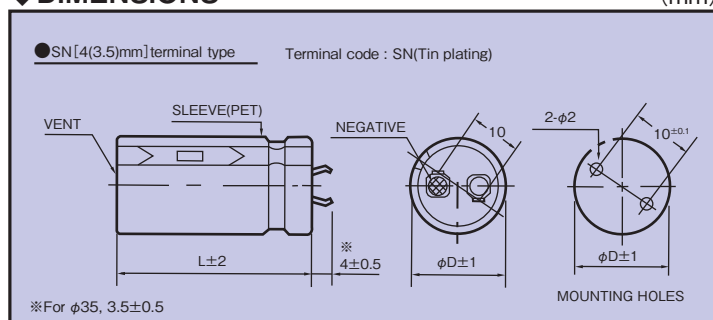

◆STANDARD SIZE

Cap (μ F)	WV ϕ D	400							
		ϕ 22		ϕ 25		ϕ 30		ϕ 35	
150		22×25	1.21						
180		22×30	1.45						
220		22×35	1.58	25×25	1.58				
270		22×40	1.67	25×30	1.67	30×25	1.67		
330		22×45	1.90	25×35	1.90	30×30	1.90		
390		22×50	2.13	25×40	2.13	30×30	2.13	35×25	2.13
470				25×45	2.39	30×35	2.39	35×30	2.39
560						30×40	2.69	35×35	2.69
680						30×50	2.96	35×35	2.96
820								35×45	3.25
1000								35×50	3.60

Cap (μ F)	WV ϕ D	420							
		ϕ 22		ϕ 25		ϕ 30		ϕ 35	
150		22×25	1.30						
180		22×30	1.48	25×25	1.48				
220		22×35	1.65	25×30	1.65				
270		22×45	1.94	25×35	1.94	30×25	1.94		
330		22×50	2.17	25×40	2.17	30×30	2.17	35×25	2.17
390				25×45	2.27	30×30	2.27	35×30	2.27
470				25×50	2.61	30×35	2.61	35×30	2.61
560						30×45	2.82	35×35	2.82
680						30×50	3.11	35×40	3.11
820								35×45	3.40

Cap (μ F)	WV ϕ D	450							
		ϕ 22		ϕ 25		ϕ 30		ϕ 35	
120		22×25	1.04						
150		22×30	1.29						
180		22×35	1.40	25×25	1.40				
220		22×40	1.66	25×30	1.66				
270		22×45	1.81	25×35	1.81	30×25	1.81		
330				25×40	2.10	30×30	2.10	35×25	2.10
390				25×50	2.32	30×35	2.32	35×30	2.32
470						30×40	2.66	35×35	2.66
560						30×50	2.82	35×35	2.82
680								35×45	3.00
820								35×50	3.30

↑
 Ripple Current (A r.m.s./120Hz, 85°C)
 Case Size ϕ D×L(mm)