

UTC MC4580 LINEAR INTEGRATED CIRCUIT

DUAL OPERATIONAL AMPLIFIER


DESCRIPTION

The UTC MC4580 is the dual operational amplifier, specially designed for improving the tone control, which is most suitable for the audio application.


Featuring noiseless, higher gain bandwidth, high output current and low distortion ratio, and it is most suitable not only for acoustic electronic parts of audio pre-amp and active filter, but also for the industrial measurement tools. It is also suitable for the head phone amp at higher output current, and further more, it can be applied for the handy type set operational amplifier of general purpose in application of low voltage single supply type which is properly biased of the input low voltage source.

FEATURES

- *Operating Voltage ($\pm 2V$ to $\pm 18V$)
- *Low Input Noise Voltage ($0.8 \mu V_{rms}$ typ.)
- *Wide Gain Bandwidth Product (15MHz typ.)
- *Low Distortion (0.0005% typ.)
- *Slew Rate ($5V/\mu s$ typ.)
- *Bipolar Technology

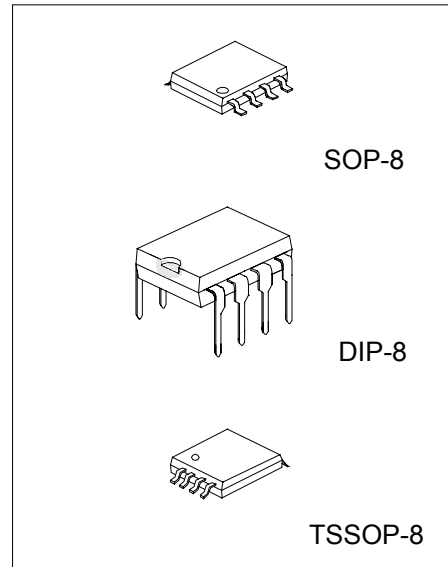


PIN CONFIGURATION

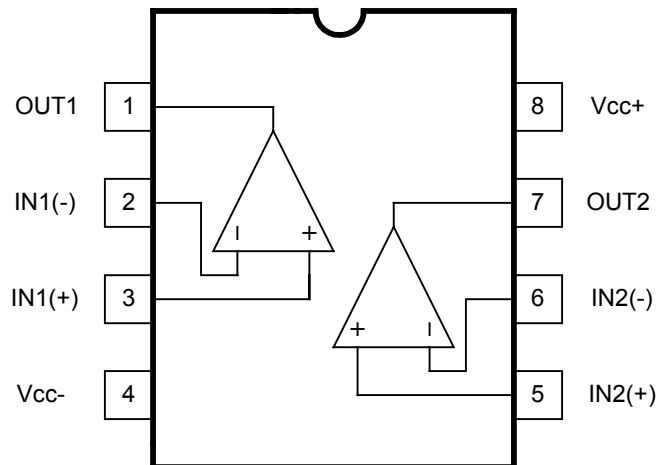

UTC MC4580 LINEAR INTEGRATED CIRCUIT

TEST CIRCUIT

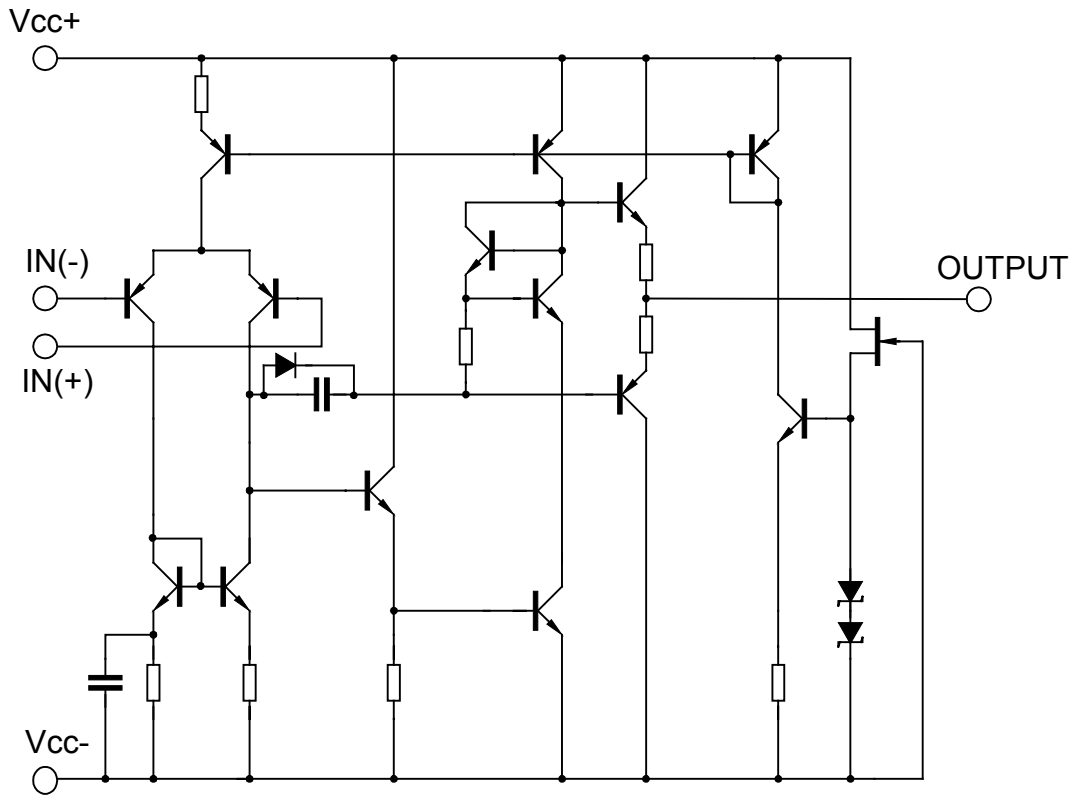

ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V ⁺ /V ⁻	± 18	V
Input Voltage	V _{IC}	± 15	V
Differential Input Voltage	V _{ID}	± 30	V
Output Current	I _O	± 50	mA
Power Dissipation	P _D	300 (SOP-8) 800 (DIP-8) 250(TSSOP-8)	mW
Operating Temperature Range	T _{opr}	-40 to+85	°C
Storage Temperature Range	T _{stg}	-40 to +125	°C


UTC MC4580 LINEAR INTEGRATED CIRCUIT

ELECTRICAL CHARACTERISTICS ($V^+/V^- = \pm 15V$, $T_a = 25^\circ C$)


PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Input Offset Voltage	V_{IO}	$R_S \leq 10k\Omega$	-	0.5	3	mV
Input Offset Current	I_{IO}		-	5	200	nA
Input Bias Current	I_B		-	100	500	nA
Large Signal Voltage Gain	A_V	$V_O = \pm 10V$, $R_L \geq 2k\Omega$	90	110	-	dB
Output Voltage Swing	V_{OM}	$R_L \geq 2k\Omega$	± 12	± 13.5	-	V
Input Common Mode Voltage Range	V_{ICM}		± 12	± 13.5	-	V
Common Mode Rejection Ratio	CMR	$R_S \leq 10k\Omega$	80	110	-	dB
Supply Voltage Rejection Ratio	SVR	$R_S \leq 10k\Omega$	80	110	-	dB
Operating Current	I_{CC}		-	6	9	mA
Slew Rate	SR	$R_L \geq 2k\Omega$	-	5	-	V/ μs
Gain bandwidth Product	GB	$f = 10KHz$	-	15	-	MHz
Total Harmonic Distortion	THD	$A_V = 20dB$, $V_O = 5V$, $R_L = 2k\Omega$, $f = 1KHz$	-	0.0005	-	%
Input Noise Voltage	V_{NI}	RIAA $R_S = 2.2k\Omega$, 30kHz LPF	-	0.8	-	μV_{rms}

TYPICAL CHARACTERISTICS


Maximum Output Voltage Swing vs. Load Resistance

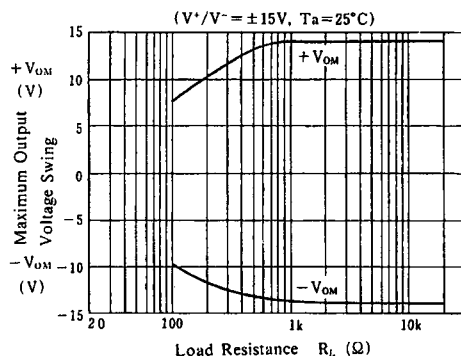


Maximum Output Voltage Swing vs. Frequency

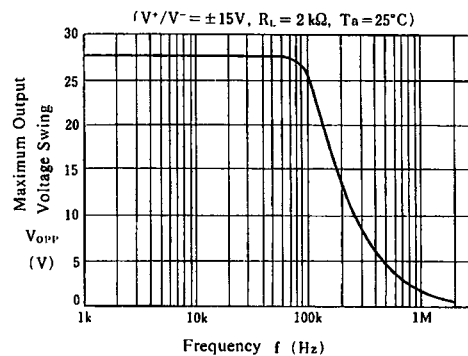

Output Voltage Swing vs. Output Current

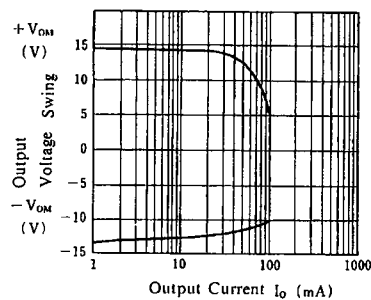


Equivalent Input Noise Voltage vs. Frequency

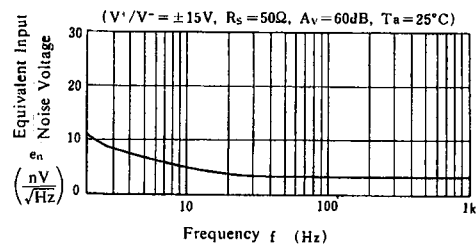


UTC MC4580 LINEAR INTEGRATED CIRCUIT


Operating Current vs. Temperature

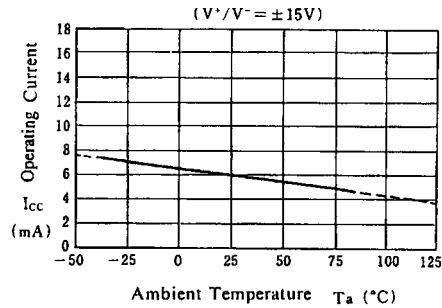


Output Voltage Swing vs. Temperature

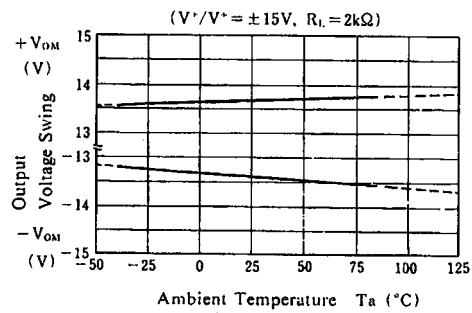


Input Offset Voltage vs. Temperature

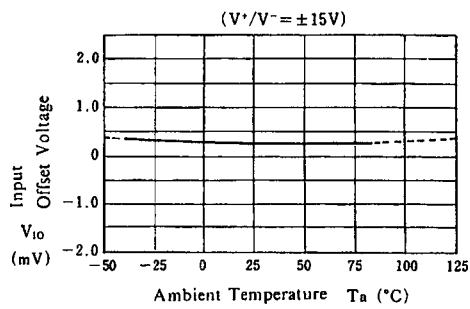


Input Bias Current vs. Temperature

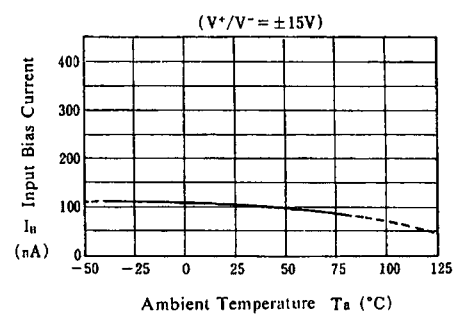

Maximum Output Voltage Swing vs. Operating Voltage

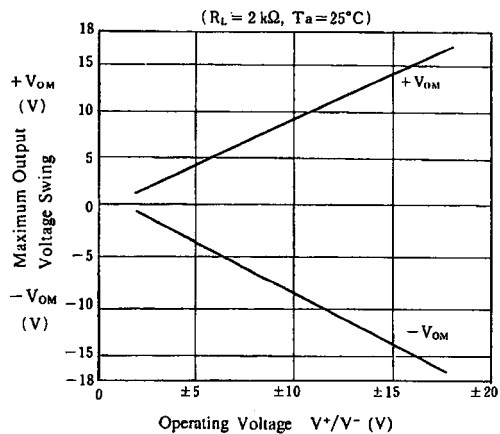


Operating Current vs. Operating Voltage

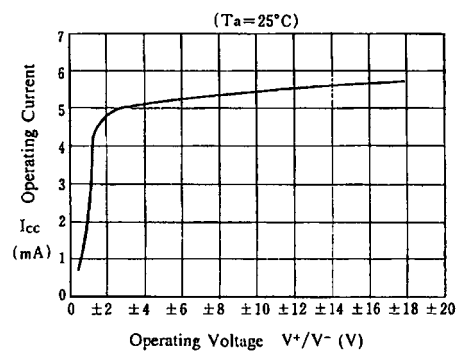


UTC MC4580 LINEAR INTEGRATED CIRCUIT

Total Harmonic Distortion vs. Output Voltage

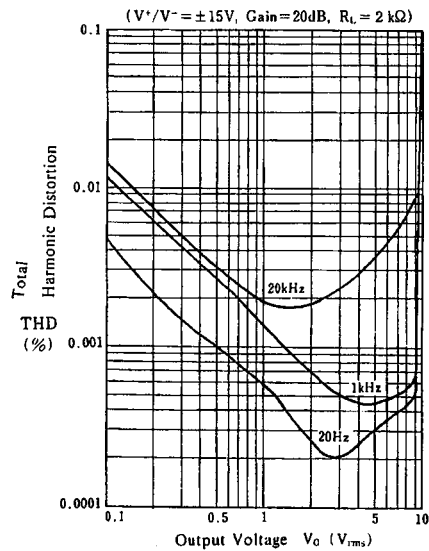

Voltage Gain, Phase vs. Frequency

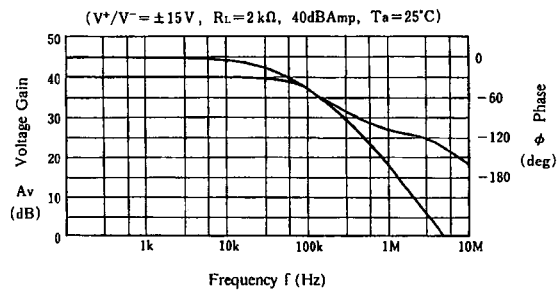

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.