

UTV020

2 Watts, 25 Volts, Class A
UHF Television - Band IV & V


GENERAL DESCRIPTION

The UTV 020 is a COMMON EMITTER transistor capable of providing 2 Watt Peak, Class A, RF Output Power over the band 470 - 860 MHz. Gold Metalization and Diffused Ballasting are used to provide high reliability and supreme ruggedness.

ABSOLUTE MAXIMUM RATINGS

| | |
|------------------------------------|-----------------|
| Maximum Power Dissipation @ 25°C | 17 Watts |
| Maximum Voltage and Current | |
| BVces Collector to Emitter Voltage | 45 Volts |
| BVceo Collector to Emitter Voltage | 25 Volts |
| BVebo Emitter to Base Voltage | 4.0 Volts |
| Ic Collector Current | 1.2 Amps |
| Maximum Temperatures | |
| Storage Temperature | - 65 to + 150°C |
| Operating Junction Temperature | + 200°C |

CASE OUTLINE 55FT, STYLE 2

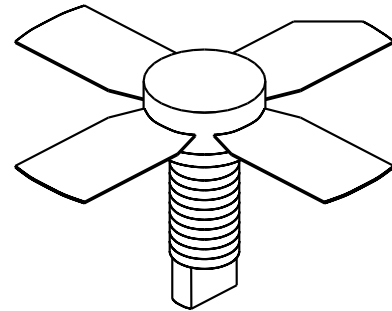

ELECTRICAL CHARACTERISTICS @ 25 °C

| SYMBOL | CHARACTERISTICS | TEST CONDITIONS | MIN | TYP | MAX | UNITS |
|-------------------|----------------------------|------------------------------|-----|-----|------|-------|
| P _{out} | Power Out - Pk Sync | F = 470 - 860 MHz | 2.0 | | | Watts |
| P _{in} | Power Input | V _{cc} = 25 Volts | | | 0.2 | Watts |
| P _g | Power Gain | I _c = 410 mA | | 12 | | dB |
| IMD ¹ | Intermodulation Distortion | P _{ref} = 2.0 Watts | | -60 | | dB |
| VSWR ₁ | Load Mismatch Tolerance | F = 860 MHz | | | 30:1 | |

| | | | | | | |
|-----------------|--------------------------------|-----------------------------------|-----|-----|----|-------|
| LVceo | Collector to Emitter Breakdown | I _c = 40 mA | 26 | | | Volts |
| BVces | Collector to Base Breakdown | I _c = 10 mA | 45 | | | Volts |
| BVebo | Emitter to Base Breakdown | I _e = 1 mA | 4.0 | | | Volts |
| h _{FE} | Current Gain | V _{ce} = 5 V, 250mA | 10 | | | |
| Cob | Output Capacitance | V _{cb} = 20 V, F = 1 MHz | | 8.0 | | pF |
| θ _{jc} | Thermal Resistance | T _c = 25°C | | | 10 | °C/W |


Note 1: F1=860 MHz, F2=863.5 MHz, F3=864.5 Mhz

European test method, Vision = - 8dB, Sideband= - 16dB, Sound = -7 dB

Initial Issue June, 1994


GHZ TECHNOLOGY INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHZ RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.

GHZ Technology Inc. 3000 Oakmead Village Drive, Santa Clara, CA 95051-0808 Tel. 408 / 986-8031 Fax 408 / 986-8120

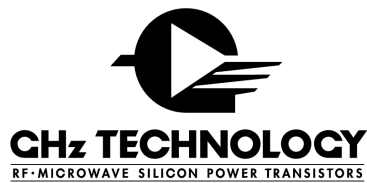


UTV020

DC SAFE OPERATING AREA

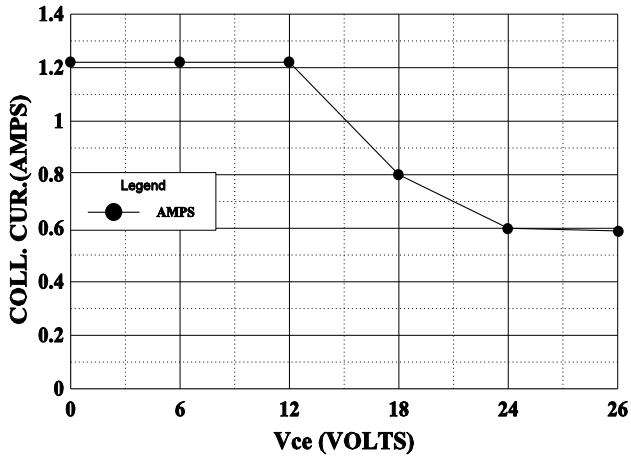


POWER OUTPUT vs POWER INPUT

Vcc = 25V, Frequency 860MHz

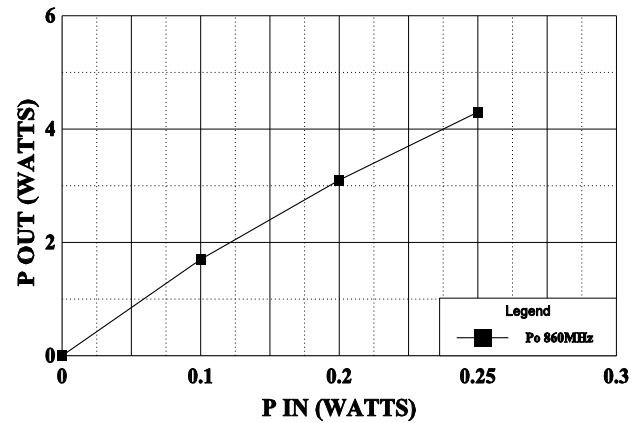


SERIES LOAD IMPEDANCE vs FREQUENCY

Vcc = 25V, Pin =

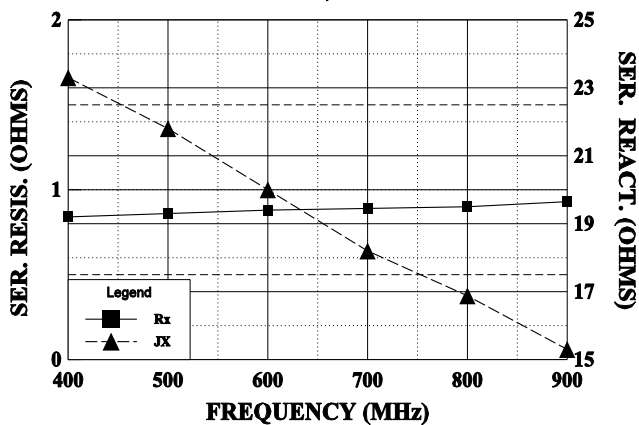


IMD vs Pout

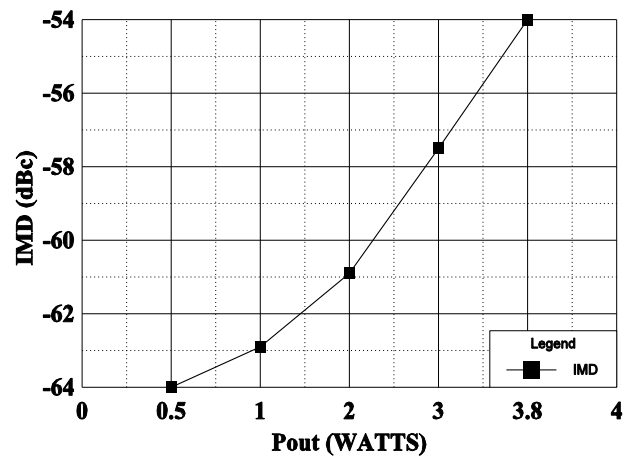

SERIES INPUT IMPEDANCE vs FREQUENCY

Vcc = 25V, Pin =

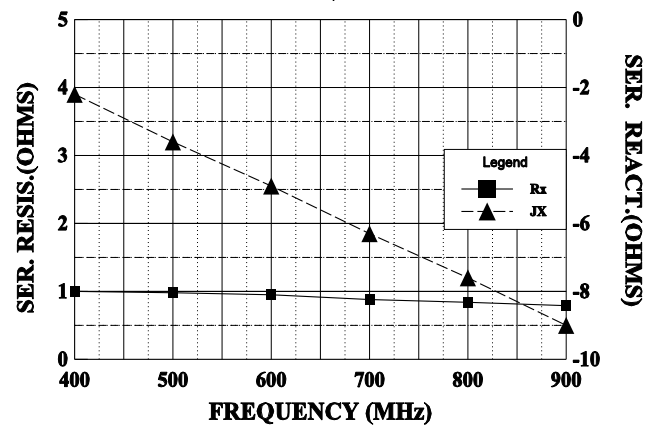

IMD vs Icq

