



## ➡ Relays with Forcibly Guided Contacts (Safety Relays)


**SCHRACK V23049B1007A131**

**(Tyco Part Number: 3-1393256-4)**

Product Features <small>(Please use the product drawing for all design activity)</small>		Additional Features	
Brand:	Schrack	Relay Type:	PCB
		Contact Type:	Single button, forcibly guided
Product Type:	Safety Relay SR4	Approx. Dimensions	42.00 x 12.50 x 30.00
Series:	V23049-B	(L x W x H) (mm [in]):	[1.654 x .492 x 1.182]
Actuating System:	DC	Contact Material:	Silver Cadmium Oxide
Contact Arrangement:	3 Form A & 1 Form B, 3PST-NO & SPST-NC, 3 N/O & 1 N/C	Number of Bistable Coils:	Single
Contact Current Rating (Amps.):	6	Bistable:	No
Coil Resistance (?):	1020	Coil Magnetic System:	Monostable
Coil Power, Nominal (mW):	0.55	Polarized:	No
Input Voltage (VDC):	24	Mounting Options:	PC Board
Enclosure:	Sealed	Termination Type:	Through Hole
		Approved Standards:	UL Recognized, VDE Component Mark, TUV Approved, CSA Certified




## Outline Dimensions

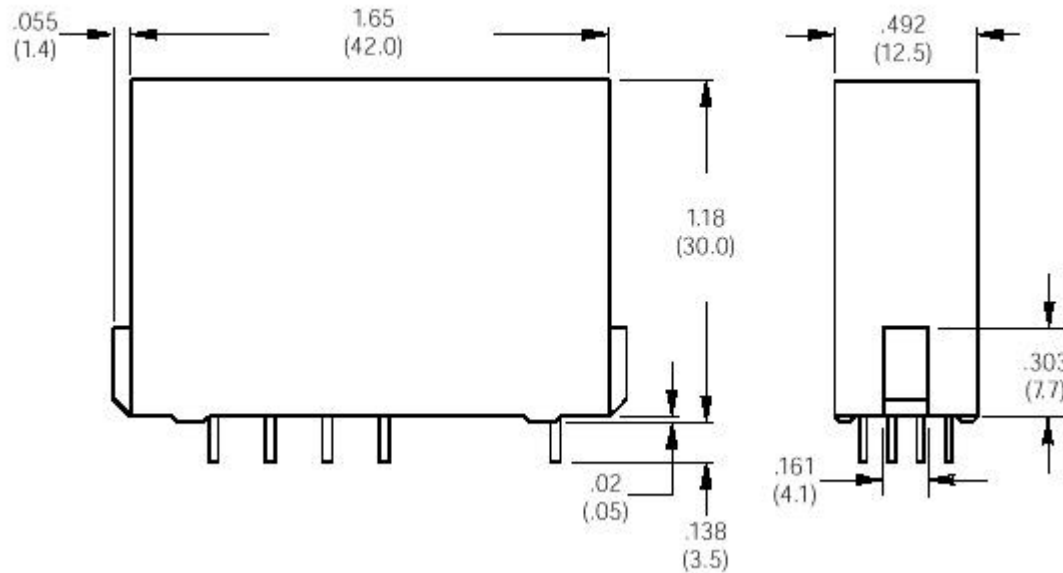

## Wiring Diagrams (Bottom Views)

3 NO and 1 NC

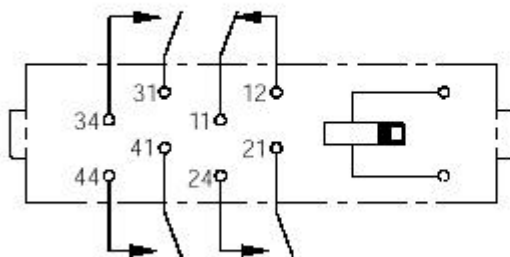

## Suggested PC Board Layouts (Bottom View)

