




PHASE NOISE (1 Hz BW, typical)

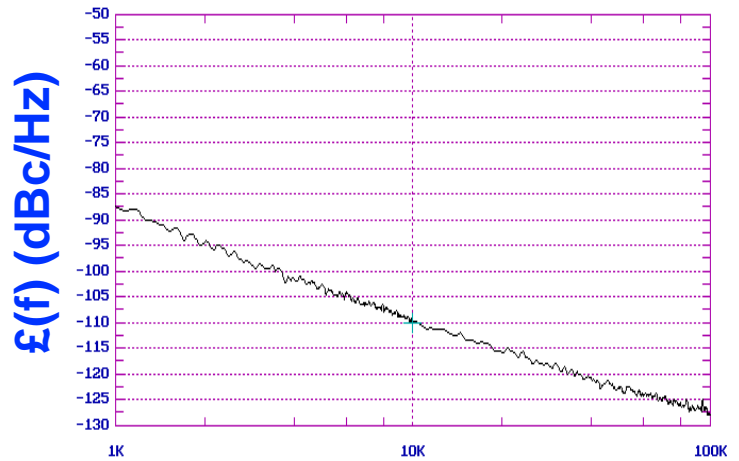

OFFSET (Hz)


FEATURES		
• Frequency Range:	360 - 410	MHz
• Tuning Voltage:	0.5-5	Vdc
• MINI-14S - Style Package		
APPLICATIONS		
• Satellite Modems		
• Mobile Radios		
• Earthstations		

PERFORMANCE SPECIFICATIONS	VALUE	UNITS
Oscillation Frequency Range	360 - 410	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-109	dBc/Hz
Harmonic Suppression (2nd, typ.)	-3	dBc
Tuning Voltage	0.5-5	Vdc
Tuning Sensitivity (avg.)	39	MHz/V
Power Output	7.25±2.75	dBm
Load Impedance	50	Ω
Input Capacitance (max.)	300	pF
Pushing	<3	MHz/V
Pulling (14 dB Return Loss, Any Phase)	<2	MHz
Operating Temperature Range	-30 to 85	°C
Package Style	MINI-14S	
POWER SUPPLY REQUIREMENTS		
Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	15	mA


All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES
<ul style="list-style-type: none"> • AN-100/1 : Mounting and Grounding of VCOs • AN-102 : Proper Output Loading of VCOs • AN-107 : How to Solder Z-COMM VCOs
NOTES:

TUNING CURVE, typ.

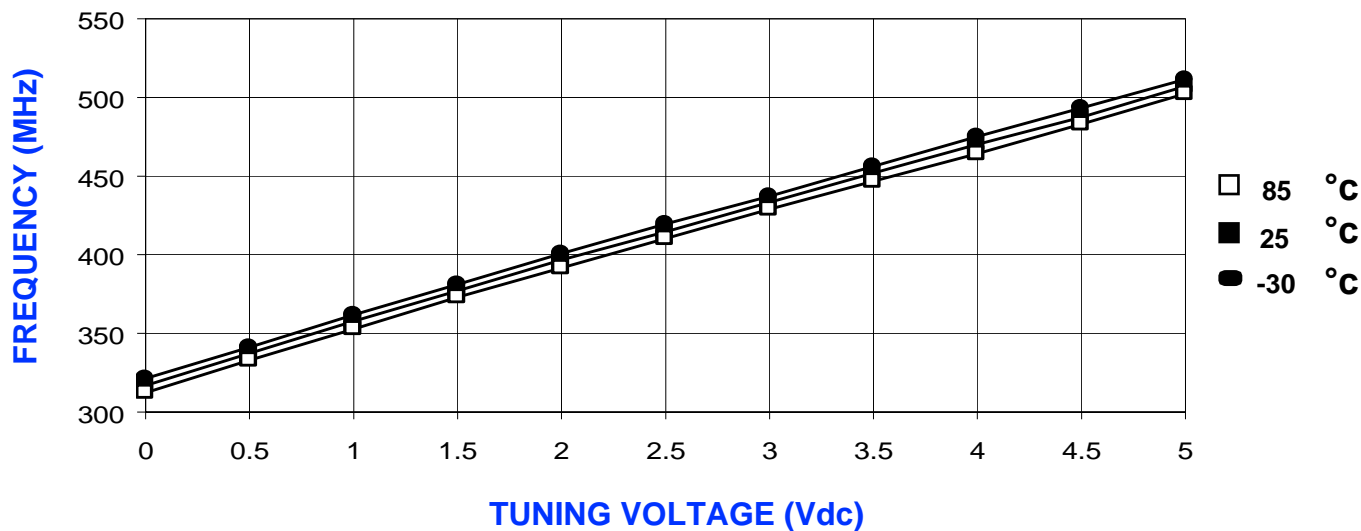

POWER CURVE, typ.

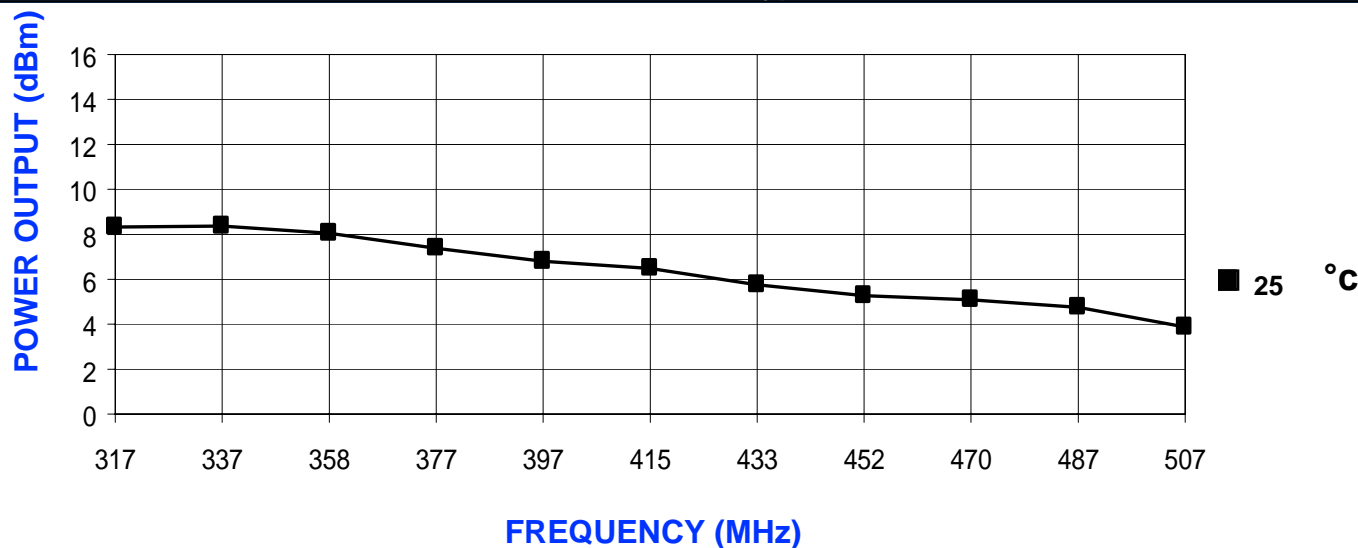

PHYSICAL DIMENSIONS

