



VD8333, VD8305

30V 100mA Low DropOut Voltage Regulator

General Description

The VD8305 three terminal positive regulators is available with 5V fixed output voltage, making it useful in a wide range of applications. Used as a Zener-diode and resistor combination replacement, the VD8305 usually provides an effective output impedance improvement of two orders of magnitude and lower quiescent current. These regulators can provide local, on-card regulation, eliminating distribution problems associated with single-point regulation. The available voltages allow the VD8305 to be used in logic systems, instrumentation, HiFi, and other solid-state electronic equipment.

The VD8305 is available in the plastic SOT89-3 package and SOT23-3 package. With adequate heat sinking, the regulator can deliver 100-mA output current. Current limiting is included to limit the peak output current to a safe value. Safe area protection for the output transistors is provided to limit internal power dissipation. If internal power dissipation is too high for the heat sinking provided, the thermal shutdown circuit prevents the IC from overheating.

Ordering Information

Part Number	Package	Body Size
VD8333	SOT89-3	
VD8305	SOT23-3	


Features

- V_{IN} Range up to 30V
- Output Voltage Tolerances of $\pm 5\%$ Over the Temperature Range
- Output Current of 100 mA
- Output Transistor Safe Area Protection
- Internal Thermal Overload Protection
- Internal Short-Circuit Current Limit
- Available in SOT-89-3, SOT23-3, Low Profile Packages


Applications

- Battery Chargers
- Portable Instrumentation
- LED Lighting
- Low Wattage Power Supplies

Pin Configuration



Typical Application Circuit

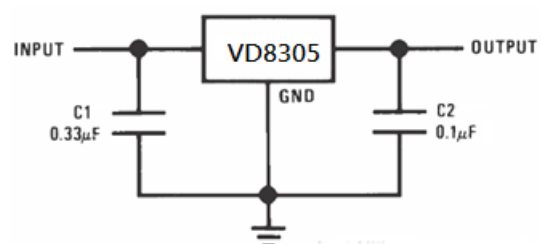




VD8333, VD8305

Pin Assignment

Pin Name	Pin No. TO92	Pin No. SOT89	Pin No. SOT23	Pin No. SOP8	Pin Function
VOUT	1	1	1	1	Output Voltage Pin
GND	2	2	3	2,3,6,7	Ground
VIN	3	3	2	8	Input Voltage pin.

Function Block Diagram

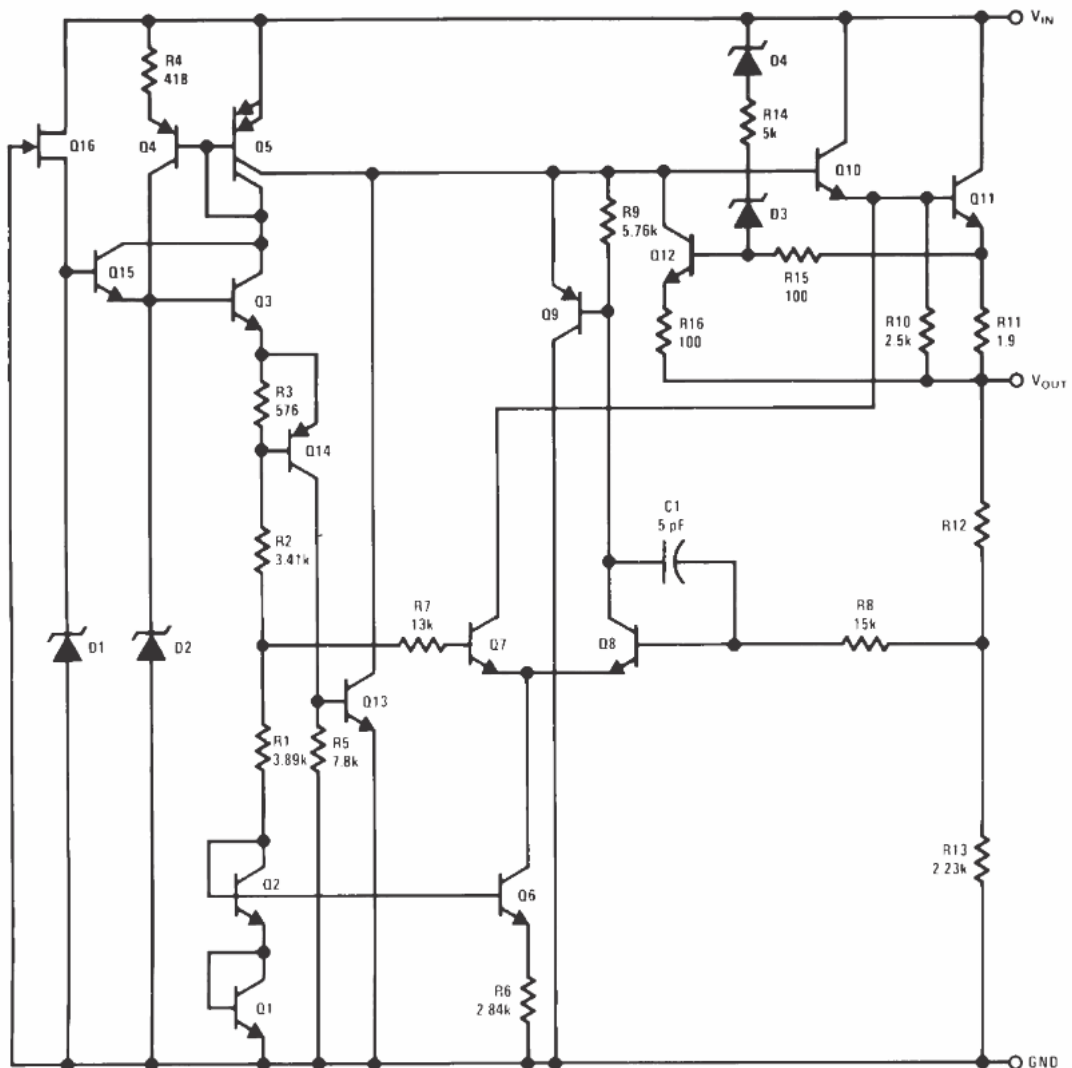



VD8333, VD8305

Absolute Maximum Ratings (Note1)

- V_{IN} ----- -0.3V to +35V
- Junction Temperature----- 125°C
- Lead Temperature (Soldering, 10 sec.)----- 300°C
- Storage Temperature ----- -65°C to 150°C

Recommended Operating Conditions

- Input Voltage, V_{IN} ----- +7V to +30V
- Junction Temperature ----- -40°C to 125°C

Electrical Characteristics

$V_{IN}=10V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $T_J=25^\circ C$, unless otherwise specified

Parameter	Symbol	Test Conditions	Min	Typ	Max	Units
Output Voltage (VD8333)	V_{OUT}	$T_J = 25^\circ C$	3.168	3.3	3.432	V
		$V_{IN} = 7 \text{ to } 20V$, $I_{OUT} = 1mA \text{ to } 40mA$ $T_J = 0^\circ C \text{ to } 125^\circ C$	3.135		3.465	
		$I_{OUT} = 1mA \text{ to } 70mA$ $T_J = 0^\circ C \text{ to } 125^\circ C$	3.135		3.465	
Output Voltage (VD8305)	V_{OUT}	$T_J = 25^\circ C$	4.8	5	5.2	V
		$V_{IN} = 7 \text{ to } 20V$, $I_{OUT} = 1mA \text{ to } 40mA$ $T_J = 0^\circ C \text{ to } 125^\circ C$	4.75		5.25	
		$I_{OUT} = 1mA \text{ to } 70mA$ $T_J = 0^\circ C \text{ to } 125^\circ C$	4.75		5.25	
Line Regulation	ΔV_{LINE}	$V_{IN} = 7 \text{ to } 20V$,		12	30	mV
		$V_{IN} = 8 \text{ to } 20V$,		10	25	
Load Regulation	ΔV_{LOAD}	$I_{OUT} = 1mA \text{ to } 100mA$		20	50	mV
		$I_{OUT} = 1mA \text{ to } 40mA$		10	25	
Quiescent Current	I_Q	$T_J = 25^\circ C$		0.3		mA
		$T_J = 125^\circ C$			1	
Quiescent Current Change	ΔI_Q	$V_{IN} = 8 \text{ to } 20V$, $T_J = 0^\circ C \text{ to } 125^\circ C$			0.2	mA
		$I_{OUT} = 1mA \text{ to } 40mA$ $T_J = 0^\circ C \text{ to } 125^\circ C$			0.1	
Ripple Rejection	PSRR	$f = 120Hz$, $V_{IN} = 8V \text{ to } 20V$, $T_J = 25^\circ C$	75	84		dB
Output Noise Voltage	V_N	$f = 10Hz \text{ to } 100KHz$		32		μV
Dropout Voltage	V_{DROP}			0.8		V
V_{OUT} Temp. Coefficient	$\Delta V_{OUT}/\Delta T$	$I_{OUT} = 5mA$		0.2	0.5	$mV/^\circ C$
Peak Output Current	I_{PK}			170		mA



VD8333, VD8305

Typical Characteristics

$V_{IN}=10V$, $I_{OUT}=40mA$, $C_{IN}=0.33\mu F$, $C_{OUT}=0.1\mu F$, $T_J=25^{\circ}C$, unless otherwise specified

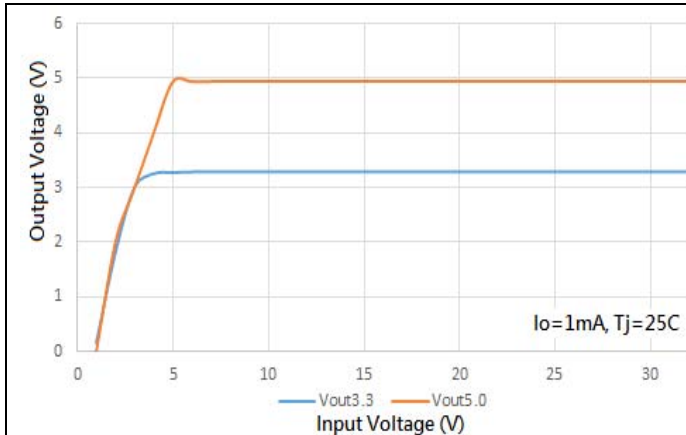


Fig 1. Output Voltage vs Input Voltage

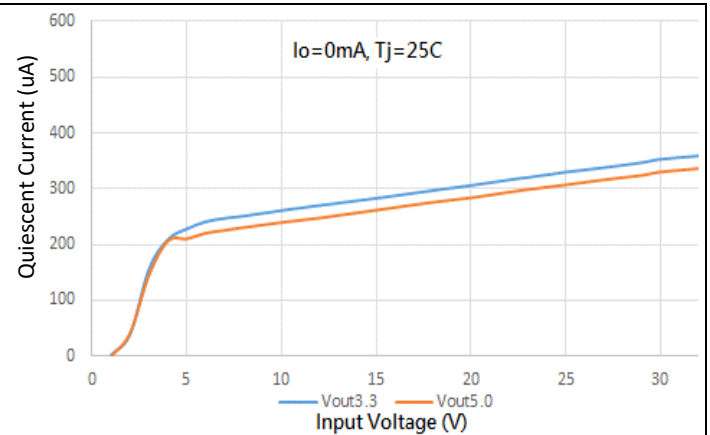


Fig 2. Quiescent Current vs Input Voltage

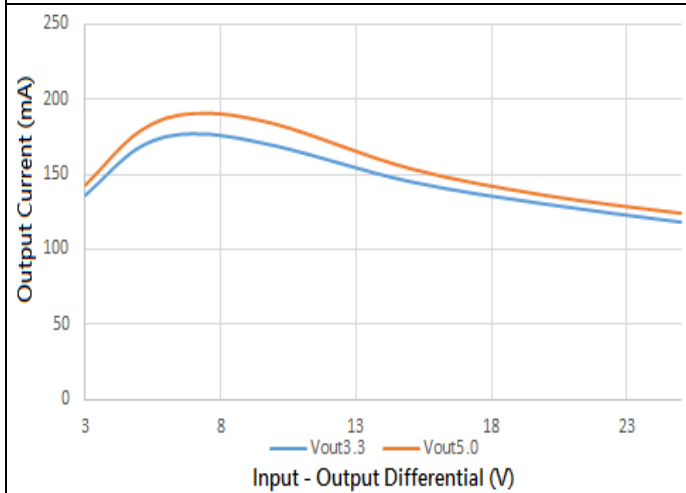


Fig 3. Peak Output Current vs Input-Output Differential

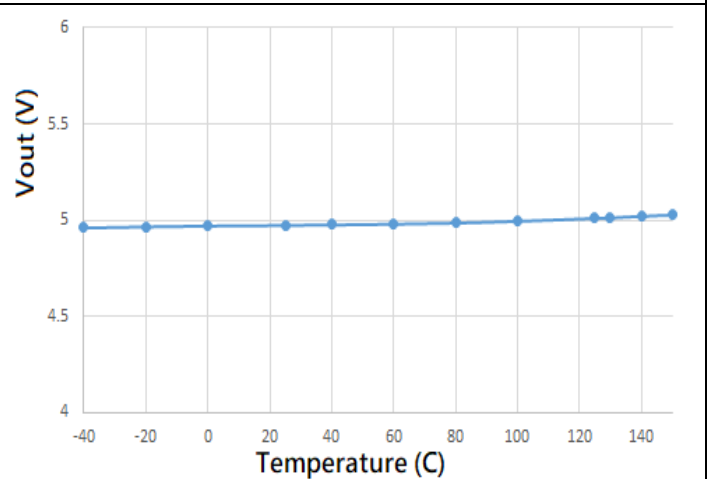


Fig 4. V_{OUT} vs Temp

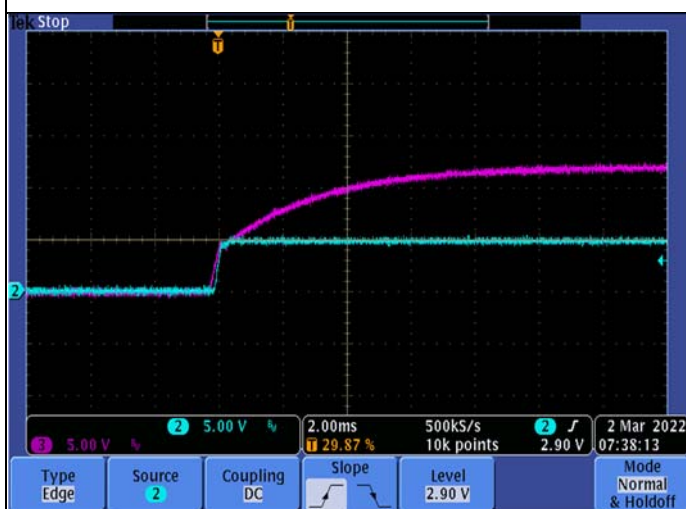


Fig 5. V_{IN} Start up

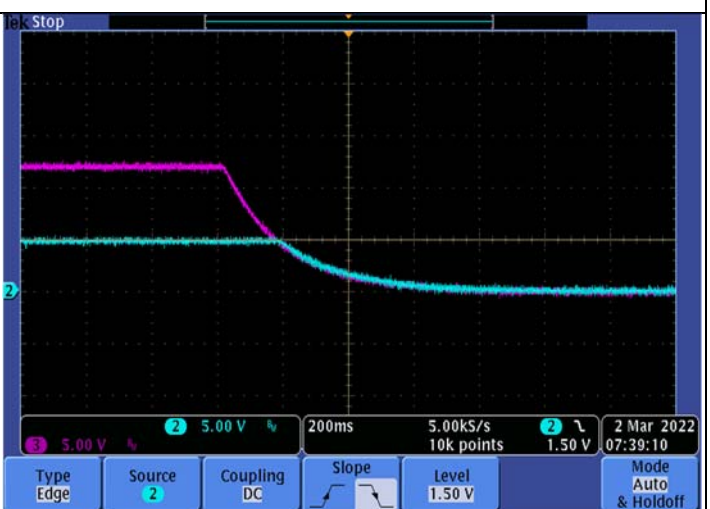


Fig 6. V_{IN} Power off



VD8333, VD8305

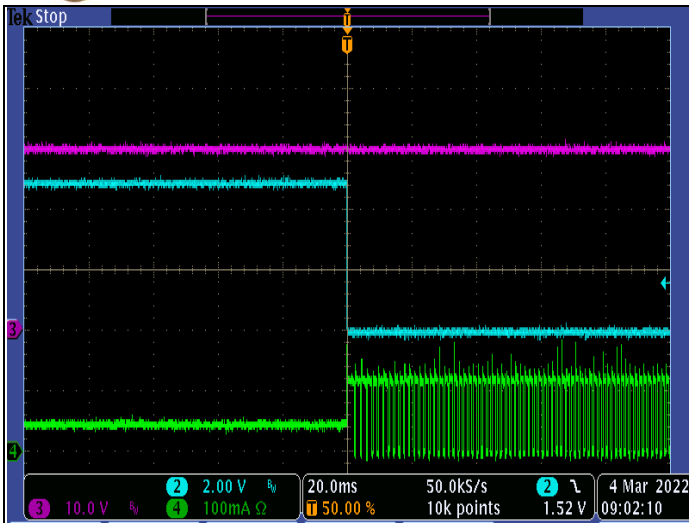


Fig 7. V_{OUT} Short to GND

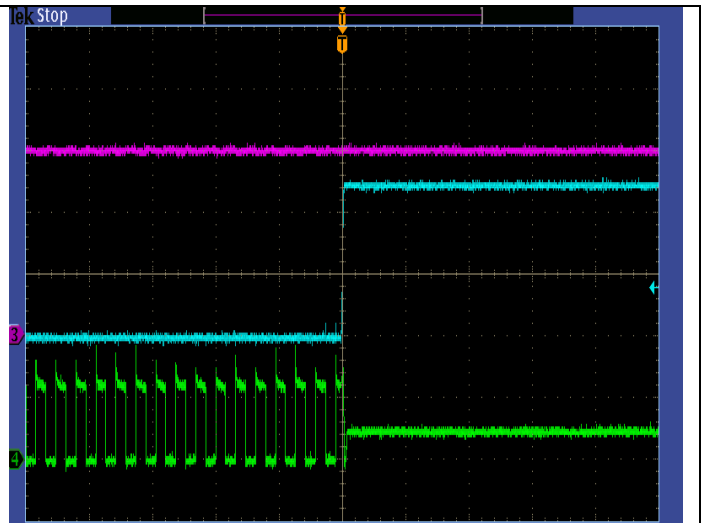


Fig 8. V_{OUT} Short and Release

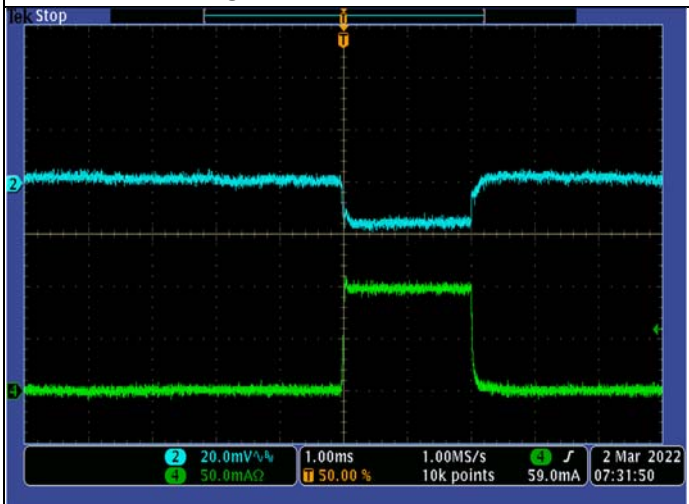


Fig 9. Load Transient


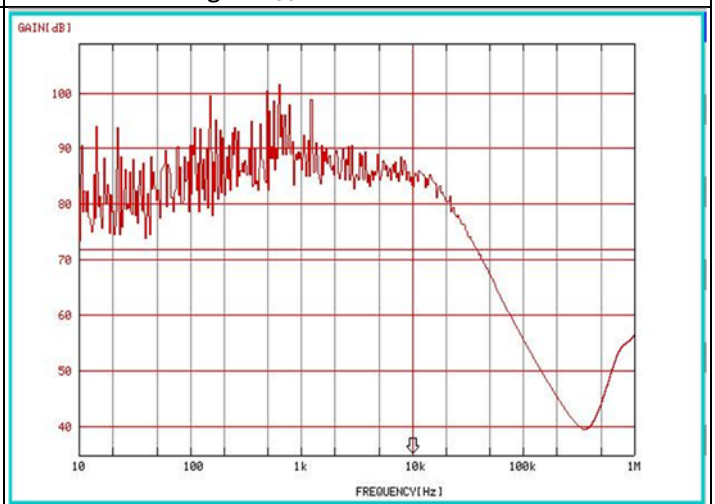


Fig 10. PSRR vs Frequency ($V_{IN} = 9V$, $V_{OUT} = 5V$)



Package Information

SOT89-3

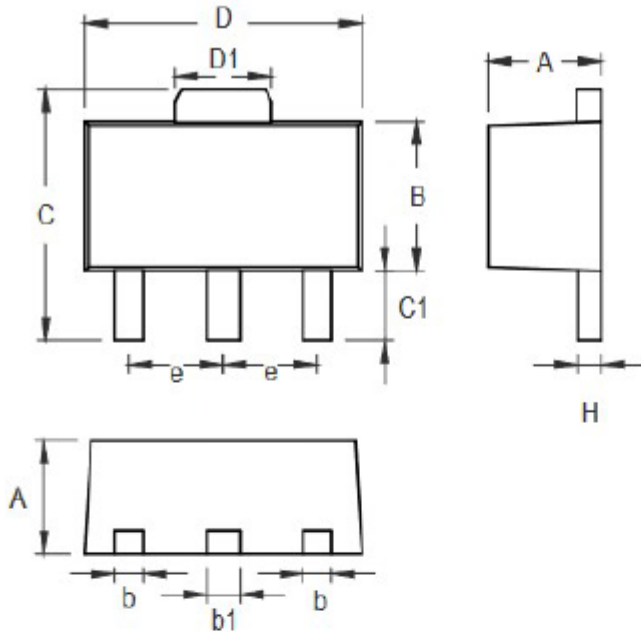


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.397	1.600	0.055	0.063
b	0.356	0.483	0.014	0.019
B	2.388	2.591	0.094	0.102
b1	0.406	0.533	0.016	0.021
C	3.937	4.242	0.155	0.167
C1	0.787	1.194	0.031	0.047
D	4.394	4.597	0.173	0.181
D1	1.397	1.753	0.055	0.069
e	1.448	1.549	0.057	0.061
H	0.356	0.432	0.014	0.017

THIS DOCUMENT IS UNCLASSIFIED AND IS NOT A CONTROLLED DOCUMENT



SOT23-3

Outline Dimension

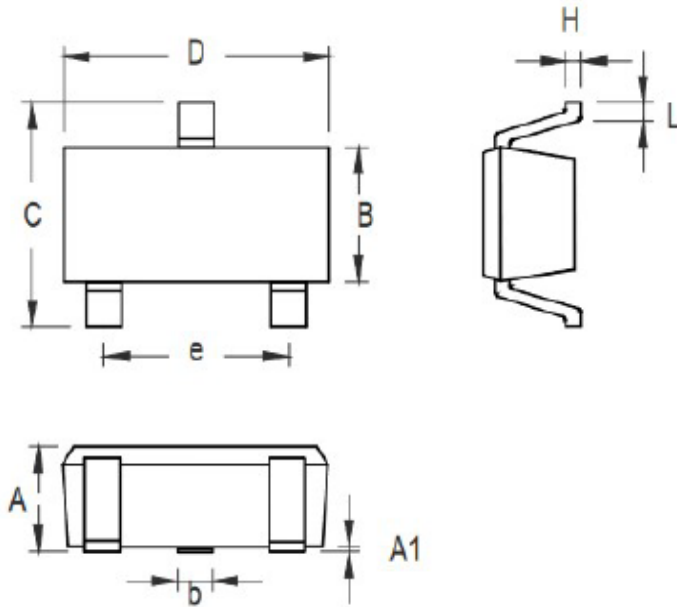


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.889	1.295	0.035	0.051
A1	0.000	0.152	0.000	0.006
B	1.397	1.803	0.055	0.071
b	0.356	0.508	0.014	0.020
C	2.591	2.997	0.102	0.118
D	2.692	3.099	0.106	0.122
e	1.803	2.007	0.071	0.079
H	0.080	0.254	0.003	0.010
L	0.300	0.610	0.012	0.024



VD8333, VD8305

Ordering Information

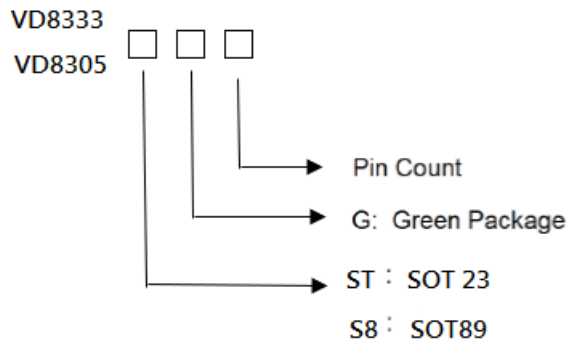

Part No.	Q`ty/Reel
VD8333STG3	4000
VD8333S8G3	4000
VD8305STG3	4000
VD8305S8G3	4000

Contact Information

Viva Electronics Incorporated

10F-1, No. 32, Gaotie 2nd Rd., Zhubei City, Hsinchu County, Taiwan, R.O.C.

Tel: 886-3-6579508

Fax: 886-3-6579509

WWW: <http://www.viva-elec.com.tw>

Sales: sales@viva-elec.com.tw

FAE Support: fae@viva-elec.com.tw